
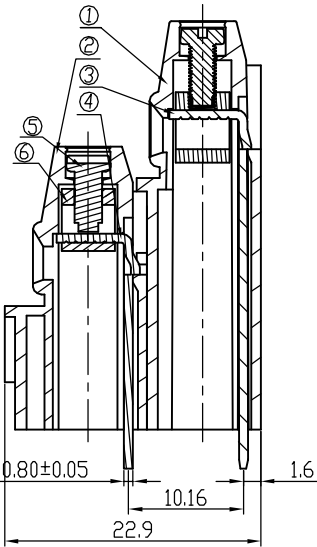



- Notes:
- 1. Pitch: 5.08mm , Ploes: XXP
 - 2. Rated voltage/current:UL 300V/20A Δ VDE 250V/24A
 - 3. Temp. Range:-40° C~+105° C
 - 4. Wrthstanding voltage: AC2000V/1Min
 - 5. Insulation resistance: 5000M Ω /DC1000V
 - 6. Wire range: 28~12AWG , 2.5mm² Δ
 - 7. Max. Torque Value: M2.5, 4.08kgf.cm
 - 8. Undimensioned Tolerances:

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
Δ		修改数量: 改为每个焊脚代表一线	LJH	03/22/08*
Δ	10-0363	修改技术参数	ZXX	10/28/10*

Pitch range in mm			Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	\curvearrowright
± 0.10	± 0.15	± 0.25	± 0.2	± 0.3	± 0.5	± 0.7	± 1.0	\square

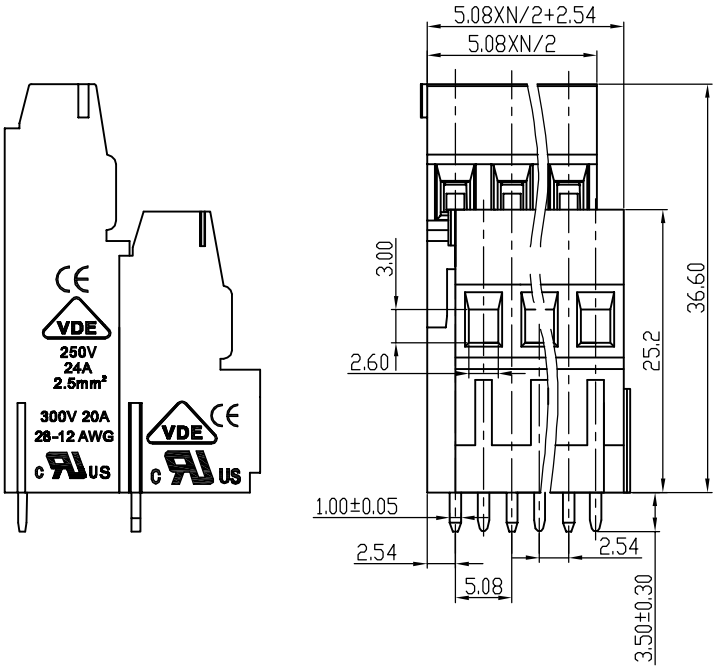

SECTION A-A

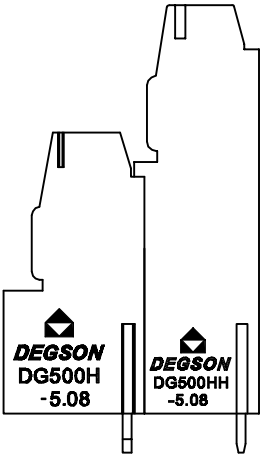

6	DG128 Wire guard	X000000020 (H)	Δ	XX	Brass	Ni plated
5	DG128 "Screws	S000001460 (H)	Δ	XX	Steel	Cr ³⁺ Zn
4	DG500H-Pin header	4038B00010 (H)	Δ	XX/2	Brass	SnCe
3	DG500HH-Pin header	4060B00010 (H)	Δ	XX/2	Brass	SnCe
2	DG500H-5.08-Housing	4038A0Y (XX/2) A (H)	Δ	1	PA66	UL94V-0

1	DG500HH-5.08 Housing(H)	Δ	4060A0Y (XX/2) A (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES	
TOLERANCES EXCEPT AS NOTED		DATE 04/26/07*	<div>DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div> <div>NAME DG500AA-5.08-XXP-1Y-00A(H)</div> <div>DRAWING NO. DG500AA-5.08-E01</div> <div>/PART NO.</div> <div>DO NOT SCALE DRAWING</div>			
MM (INCH)	CHKD DATE	DATE				
MM	APPVL DATE	DATE				
ANGLES ± 1°	G.E :	MATERIAL :				
THIRD ANGLE PROJECTION	FINISH:	SCALE : 1:1	SHEET 1 OF 1			