


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
1		Drawing Revise	Haoyh	04/28/08	
2		增加UL刻字	CSX	05/23/07	
3		增加VDE、CE刻字	LJH	12/26/07	

Notes:

1. Pitch: 5.08mm
2. Rated voltage/current:UL 300V/20A
VDE 250V/24A
3. Insulation resistance: 5000MΩ/DC1000V
4. Wrthstanding voltage: AC2000V/1min
5. Wire range: 28-12AWG 2.5mm²
6. Temp. Range: -40° C~+105° C
7. Torque: 4.08kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	∩ □
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

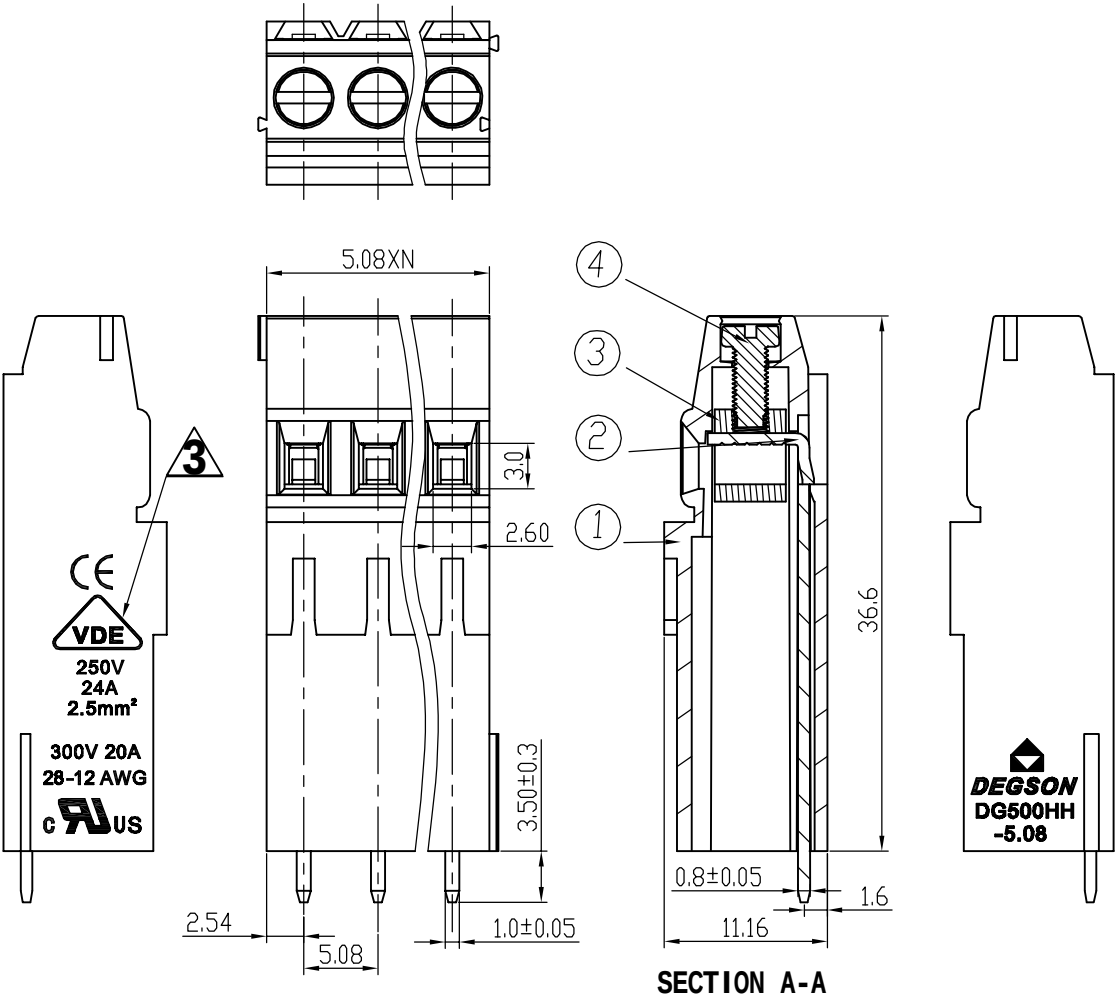

SECTION A-A

4	DG128"~Screws	S000001460 (H)	XX	Steel	Cr ³ Zn
3	DG128 Cage	X000000020 (H)	XX	Brass	Ni plated
2	DG500HH-Pin header	4060B00010 (H)	XX	Barss	SnCe

1	DG500HH-5.08 Housing	4060A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETAILED LISTS	MM (INCH)	DATE 01/06/06	DEGSON 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG500HH-5.08-XXP-1Y-00A(H) DRAWING NO. DG500HH-5.08-E03 /PART NO. DO NOT SCALE DRAWING		
	TOLERANCES EXCEPT AS NOTED	CHKD DATE			
	MM	APPVL DATE			
	.0 ±	MATERIAL :			
	.00 ±	ANGLES ± 1°			
	.000 ±	G.E :			
	THIRD ANGLE PROJECTION	FINISH:			
	SCALE : 1:1	DO NOT SCALE DRAWING			
SHEET 1			OF 1		