


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△	10-0249	增加UL刻字	Yi. Zeng	08/05/10"

Notes:

1. Pitch: 9.52mm , Poles: 2-XXP
2. Rated voltage/current: UL 300V/30A
VDE 1000V/32A
3. Operation temperatures: -40℃~+105℃
4. Withstanding Voltage: AC2500V/1Min
5. Insulation Resistance: 5000M Ω /DC1000V
6. Wire Range: 26AWG, 0.2~4.0mm²
7. Max. Torque Value: M3, 5.1kgf. cm
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

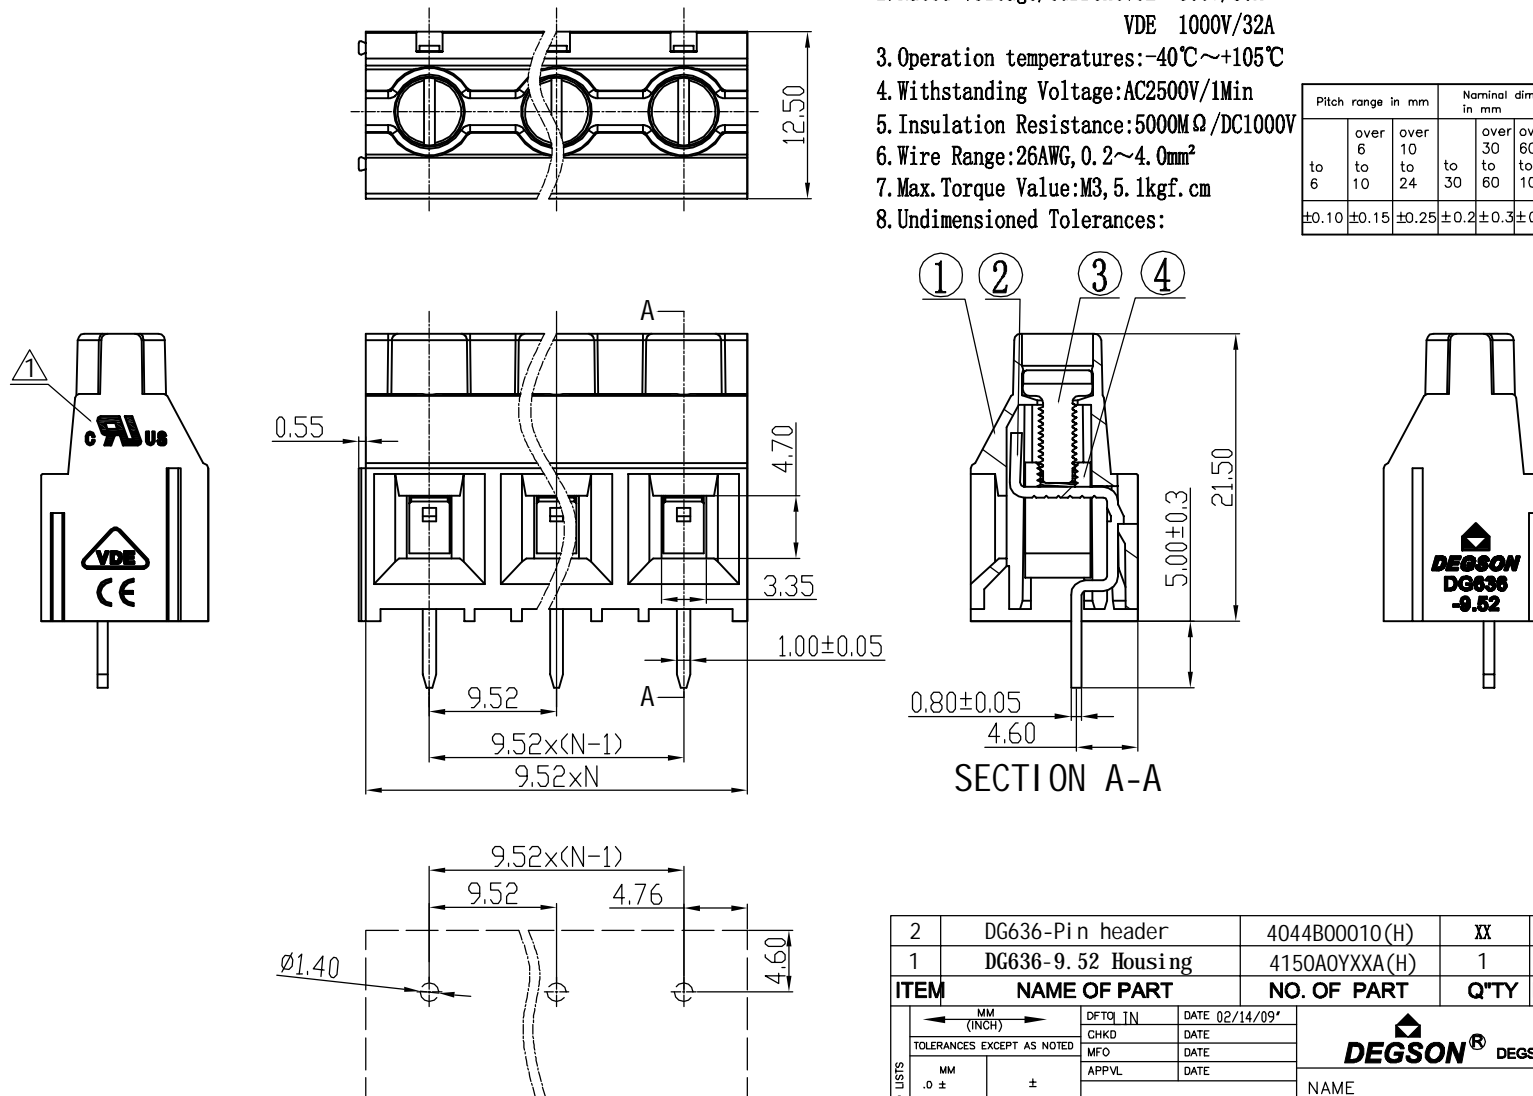

2	DG636-Pin header	4044B00010(H)	XX	Brass	SnCe		
1	DG636-9.52 Housing	4150A0YXXA(H)	1	PA66	UL94V-0		
ITEM		NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES	
DETACHED LISTS	<div><div>MM (INCH)</div><div>TOLERANCES EXCEPT AS NOTED</div><div><div>MM</div><div>.0 ±</div><div>.00 ±</div><div>.000 ±</div></div><div><div>±</div><div>±</div><div>±</div></div></div>		<div><div>DFTQ IN</div><div>CHKD</div><div>MFO</div><div>APPL</div></div> <div><div>DATE 02/14/09'</div><div>DATE</div><div>DATE</div><div>DATE</div></div>	<div><div><div><div></div><div>DEGSON®</div></div><div>宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div></div><div>NAME DG636-9.52-XXP-1Y-00A(H)</div><div><div>DRAWING NO. DG636-9.52-E01</div><div>SIZE A4</div><div>REV T1 08/05/10'</div></div></div>			
	MATERIAL :		/PART NO.				
	ANGLES ± 1°		DO NOT SCALE DRAWING				
	G.E :		SHEET 1 OF 1				
	FINISH :						
	THIRD ANGLE PROJECTION						
	SCALE : 1:1						

4	DG950-Brass cage	X000000310(H)	XX	Brass	Ni plated
3	DG636"—"Screws	S000001590(H)	XX	Steel	Cr ³⁺ Zn