


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing revise	Haoyh	04/27/06
△		增加UL刻字	YeJ	09/12/06
△		增加VDE、CE标志	WLM	08/05/08

- Notes:
- 1.Pitch:6.35mm ,Poles:2-XXP
 - 2. Rated voltage/current:UL 300V/30A
VDE 450V/24A
 - 3.Operation temperatures:-40℃~+105℃
 - 4.Withstanding Voltage:AC2000V/1Min
 - 5. Insulation Resistance:5000MΩ /DC1000V
 - 6. Wire Range:26~10AWG, 4. 0mm²
 - 7. Max. Torque Value:M3, 5. 1kgf. cm
 - 8.Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0
							0.05/10

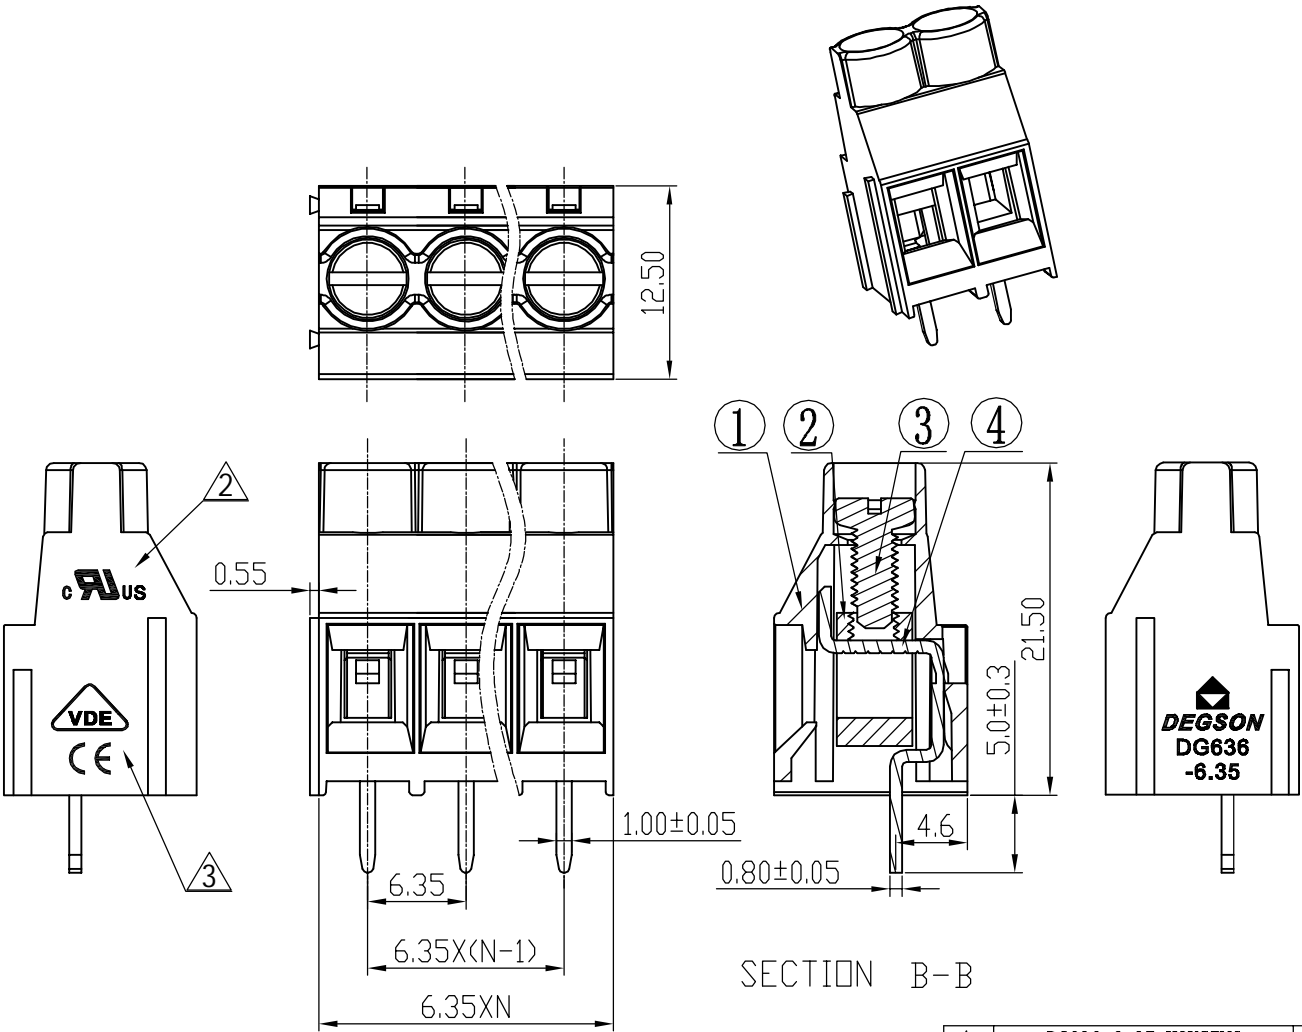

4	DG636-Pin header	4044B00010(H)	XX	Brass	SnCe plated
3	DG636"-Screws	S000001590(H)	XX	Steel	Cr ³⁺ Zn
2	950 Brass cage	X000000310(H)	XX	Brass	Ni plated

1	DG636-6.35 HOUSING	4044A0YXXA(H)	1	PA66	UL94V-0B
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DATE 10/19/05	<div>DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div> <div>NAME DG636-6.35-XXP-1Y-00A(H)</div> <div>DRAWING NO. DG636-6.35-E01</div> <div>/PART NO.</div> <div>DO NOT SCALE DRAWING</div>		
MM	±	DATE			
.0 ±	±	DATE			
.00 ±	±	DATE			
0.00 ±	±	DATE			
ANGLES ± 1°		G.E. :	SIZE A3		
THIRD ANGLE PROJECTION		FINISH :			
		SCALE : 1:1	SHEET 1 OF 1		