

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

1.Rated voltage/current : 300V / 10A

IEC Standard

1.Rated voltage/current : 250V / 12A

NOTES2:

1.Dimension shall be interpreted per
ASME Y14.5-2009

2.Pitch : 5.0mm, Poles : N=2~24P




3.Withstanding voltage : AC2000V/1Min

4.Operating temperature: -40°C~+105°C

5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm						—	∠
To	Over	To	Over	To	Over	To	Over	0.1/10	
6	10	10	24	30	60	100	150		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'	

6.RoHS Compliance

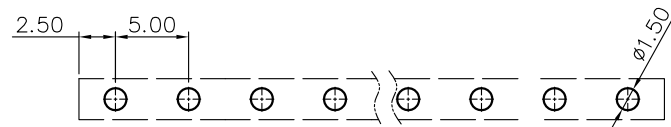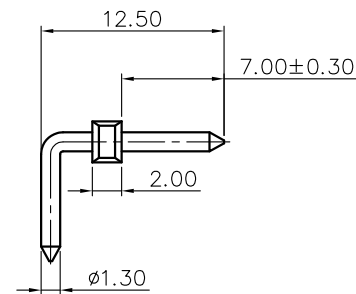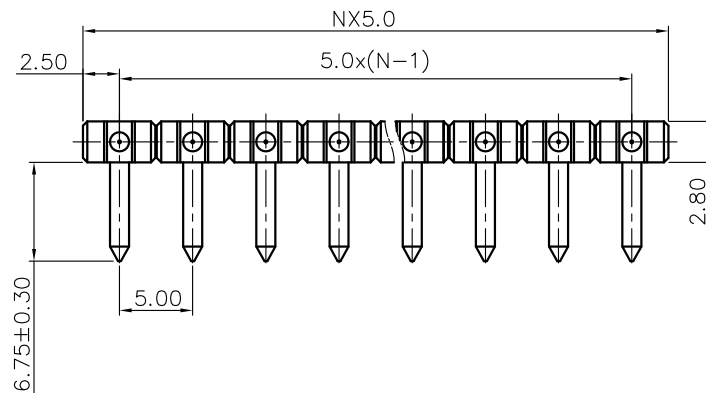

TOP VIEW-LAYOUT

DG332JR - 5.0 - XXP - 1Y - 00A (H)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

(RoHS)
00A-(Standard)

DETACHED LISTS	PART NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	/	NAME: DG332JR-5.0-XXP-1Y-00A(H)		
	CHKD:	/			
	DRFT:	/	TITLE: CUSTOMER DRAWING		
	THIRD ANGLE PROJECTION		DRAWING NO.: /		REV
			MM (INCH)	DO NOT SCALE DRAWING	DO
				SCALE	1/1
					1:1