


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		工程变更:去掉电压、电流刻字	WLM	08/13/08"
△	10-0334	修改参数	ZXX	10/04/10"

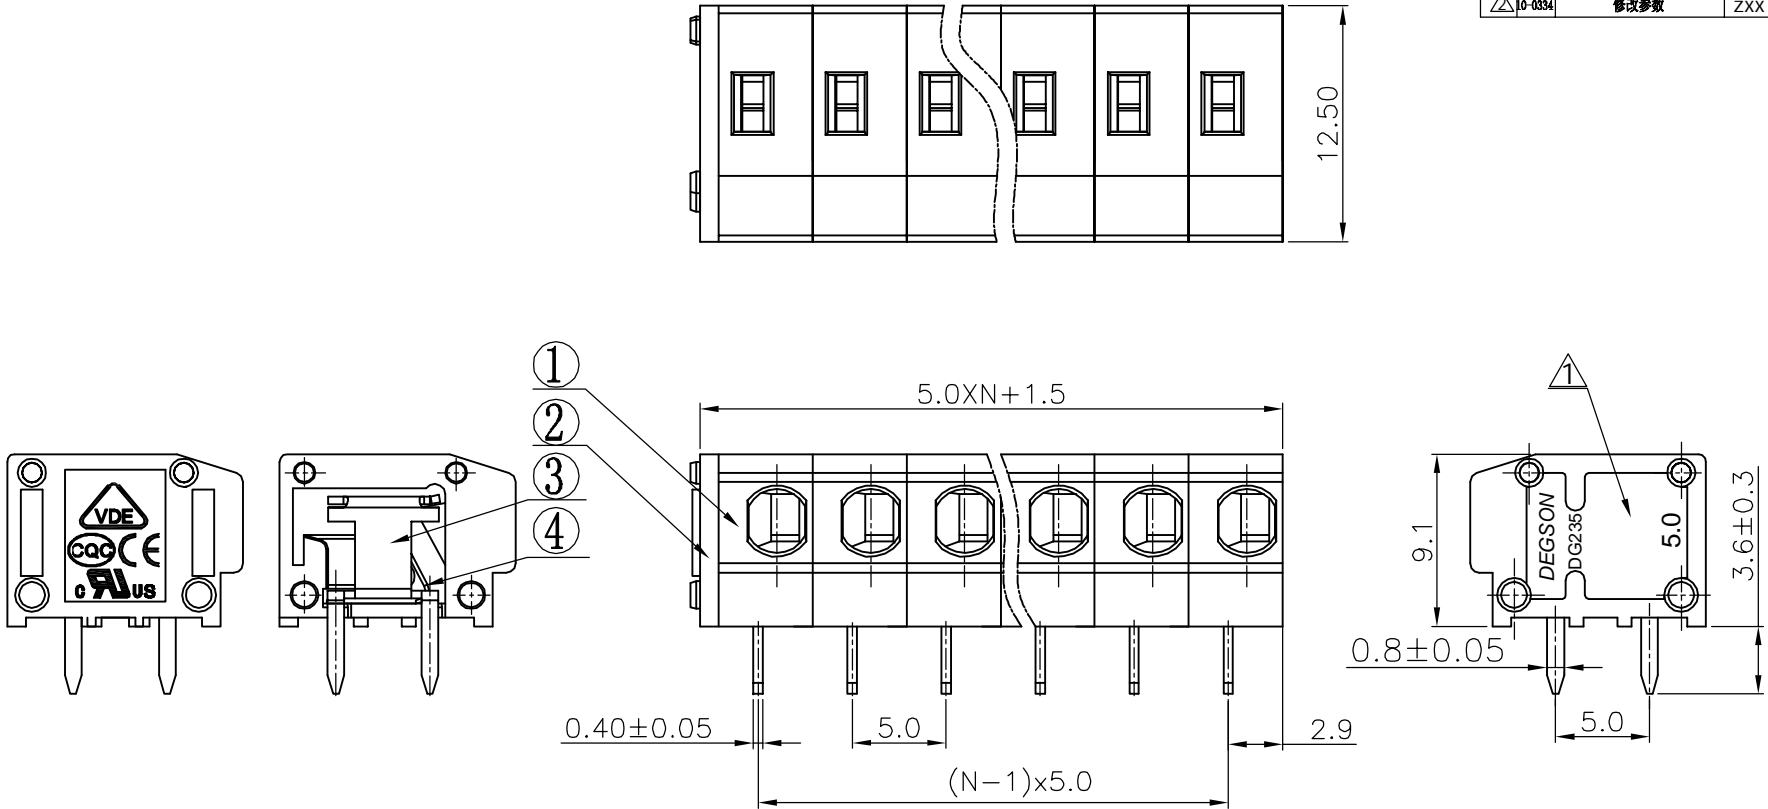

Notes:

- 1.Pitch:5.0mm , Poles:XXP
- 2.Rated voltage/current:UL 300V/10A  
VDE 250V/15A △
- 3.Operation temperatures:-40℃~+105℃
- 4.Withstanding Voltage: AC1500V/1Min
- 5.Insulation Resistance:5000MΩ/DC1000V
- 6.Wire Range: 20~14AWG , 0.2~1.5mm<sup>2</sup>(str)△  
0.2~2.5mm<sup>2</sup>(sol)
- 7.Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	to	over	
6	6 to 10	10 to 24	30 to 60	60 to 100	100 to 150	150 to 200	200 to 250	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	DG235-5.0-Spring	X000000140 (H)	XX	Stainless Steel	
3	DG235-5.0-Pin header	3008B00010 (H)	XX	Phosphor Bronze	SnCe plated
2	DG235-5.0 Cover	3008C0Y01A (H)	1	PA66	UL94V-0
1	DG235W-5.0 Housing	3012A0Y01A (H)	XX	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD					
NAME DG235W-5.0-XXP-1Y-00A(H)					
DRAWING NO. DG235W-5.0-E01					
/PART NO.					
DO NOT SCALE DRAWING					
SHEET 1 OF 1					