


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		图面更新	Yej	10/20/05
2		品名、料号增加环保标示“(H)”	LJH	12/08/07
3		工程变更:去掉电压、电流刻字	WLM	08/13/08
4	10-0334	修改参数	ZXX	10/04/10

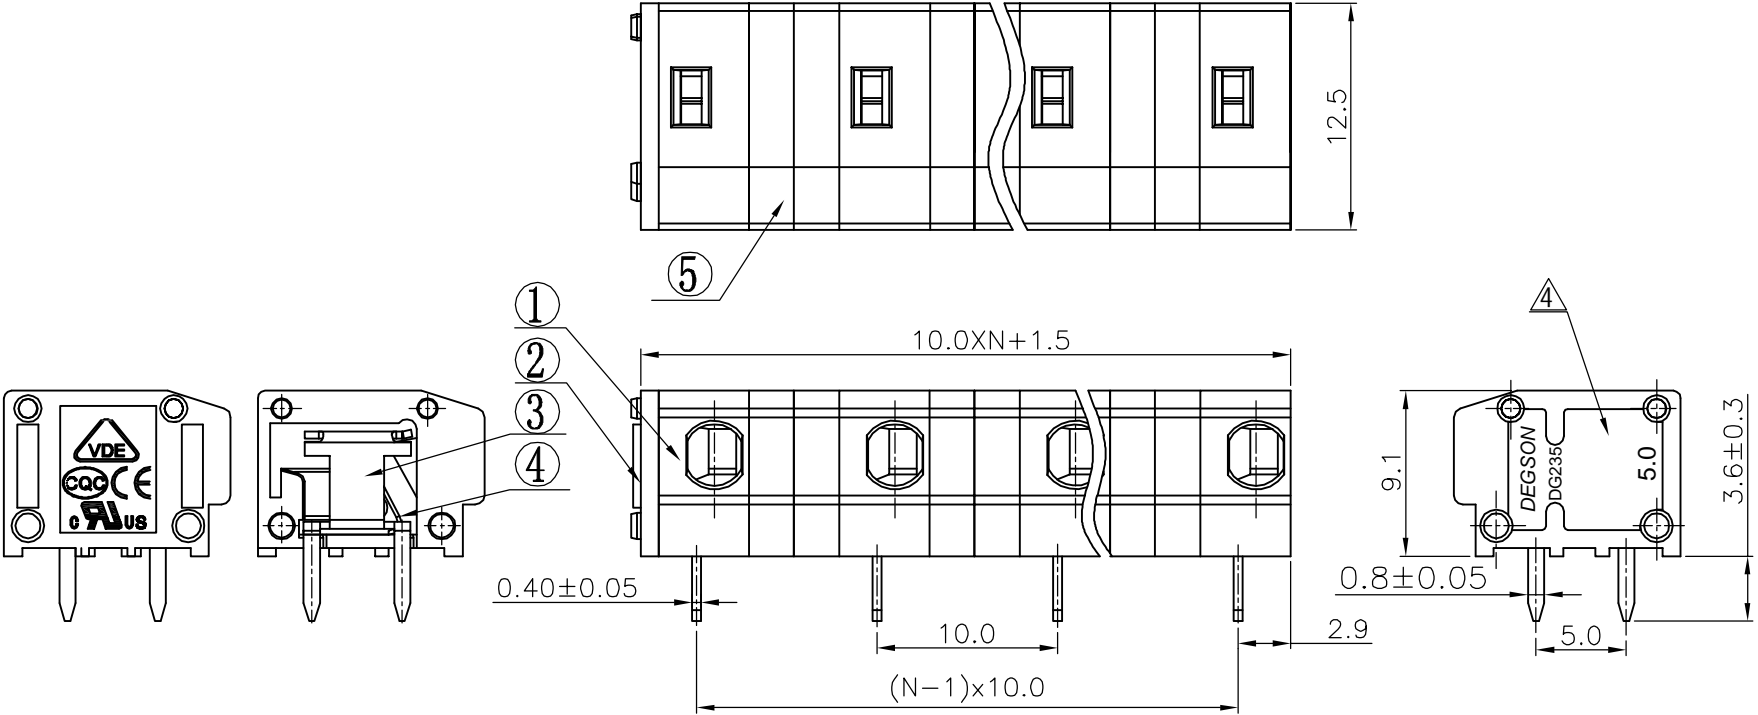

Notes:

1. Pitch:10.0mm ,Poles:XXP
2. Rated voltage/current:UL 300V/10A
VDE 250V/15A
3. Operation temperatures:-40℃~+105℃
4. Withstanding Voltage: AC1500V/1Min
5. Insulation Resistance:5000MΩ/DC1000V
6. Wire Range: 20~14AWG ,0.2~1.5mm² (str)
0.2~2.5mm² (sol)
7. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
to	over	to	to	over	over	over	over	to	
6	6	10	30	30	60	100	150		—
to 6	to 10	to 24	to 30	to 60	to 100	to 150			□
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

5	DG235-5.0 Clapboard	3008H0Y01A (H)	2 (XX-1)	PA66	UL94V-0
4	DG235-5.0-Spring	X000000140 (H)	XX	Stainless Steel	
3	DG235-5.0-Pin header	3008B00010 (H)	XX	Phosphor Bronze	SnCe plated
2	DG235-5.0 Cover	3008C0Y01A (H)	1	PA66	UL94V-0
1	DG235W-5.0 Housing	3012A0Y01A (H)	XX	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETAILED LISTS					
TOLERANCES EXCEPT AS NOTED		DFTO Home	DATE 12/20/05	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
MM		CHKD	DATE		
.0 ±		MFO	DATE		
.00 ±		APPLV	DATE		
.000 ±		MATERIAL :		NAME	
ANGLES ± 1°		G.E :		DG235W-10.0-XXP-1Y-00A(H)	
THIRD ANGLE PROJECTION		FINISH :		DRAWING NO. DG235W-10.0-E01	
		SCALE : 1:1		/PART NO.	
				DO NOT SCALE DRAWING	
				SHEET 1 OF 1	