


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		图面更新	HW	04/11/08
2		图面更新	WF	01/31/07
3		修改刻字	LJH	11/10/08

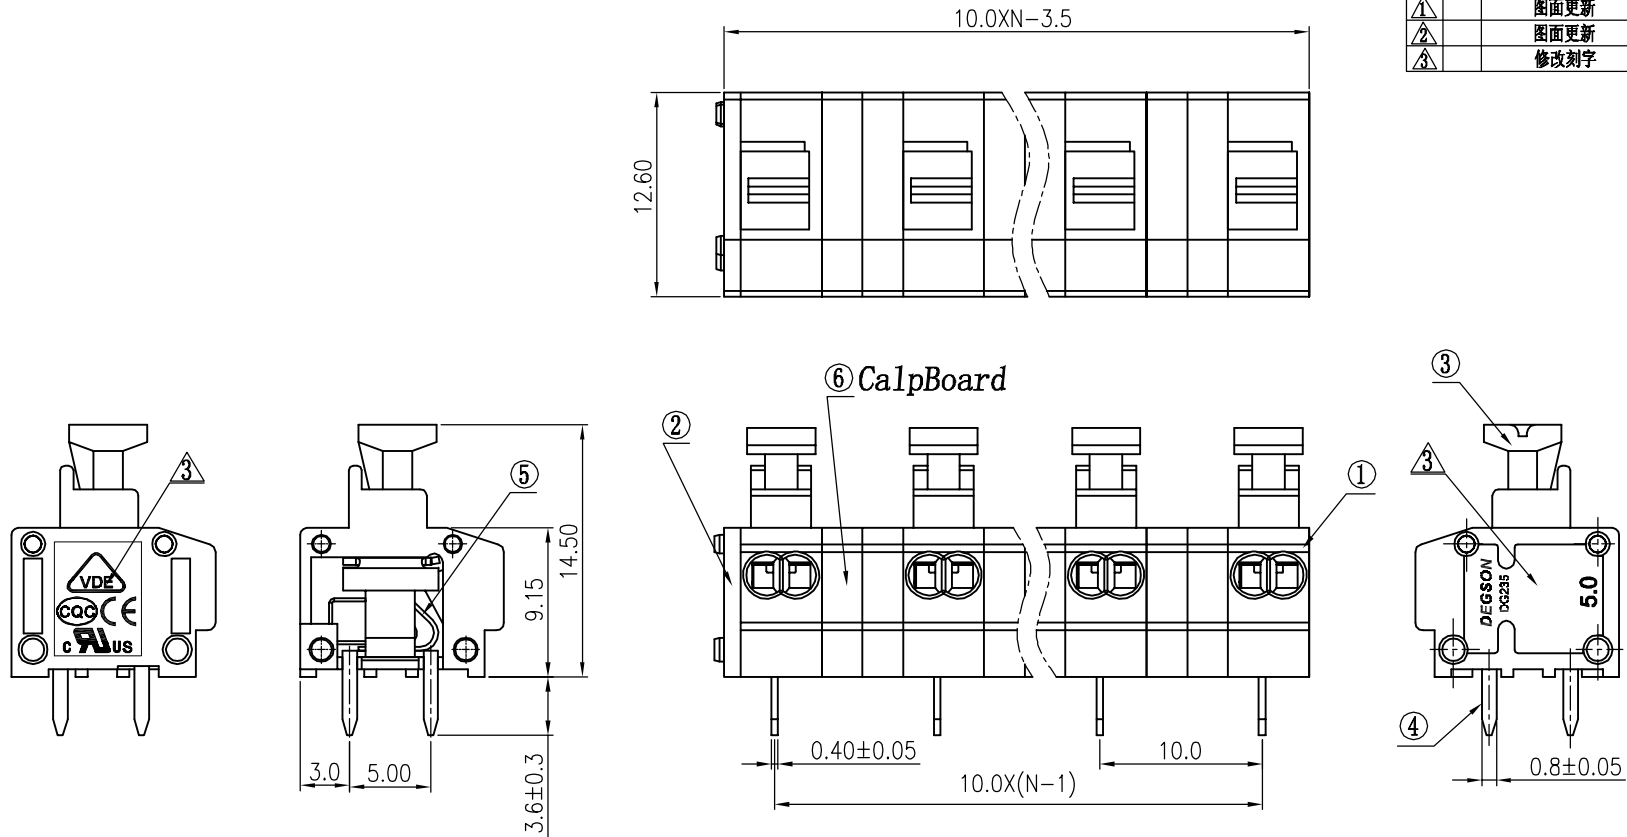

- Notes:
1. Pitch:7.5mm , Poles:2-XXP
 2. Rated voltage/current:UL 300V/5A
VDE 250V/10A
 3. Operation temperatures:-40℃~+105℃
 4. Withstanding Voltage:AC2000V/1Min
 5. Insulation Resistance:5000MΩ/DC1000V
 6. Wire Range:20~18AWG, 1.5mm²
 7. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	DG235-2.5-CalpBoard	3008H0Y01A(H)	2(XX-1)	PA66	UL94V-0
5	DG235T-5.0-Spring	X000000540(H)	XX	Stainless Steel	
4	DG235T-5.0-Pin header	3015B00010(H)	XX	Phosphor Bronze	SnCe plated
3	DG235-5.0 Button	3008D0Y01A(H)	XX	PA66	UL94V-0
2	DG235-5.0 Cover	3008C0Y01A(H)	1	PA66	UL94V-0
1	DG235T-5.0 Housing	3015A0Y01A(H)	XX	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
<div><div>DETSO HAOYH</div><div>DATE 09/20/05</div><div>CHKD DATE</div><div>MFO DATE</div><div>APPVL DATE</div><div>MATERIAL :</div><div>G.E :</div><div>FINISH :</div><div>SCALE : 1:1</div><div>DO NOT SCALE DRAWING</div><div>SHEET 1 OF 1</div></div> <div><div>NAME</div><div>DG235T-10.0-XXP-1Y-00A(H)</div><div>DRAWING NO. DG235T-10.0-E02</div><div>/PART NO.</div><div>SIZE A3</div><div>REV T3 11/10/08</div></div>					