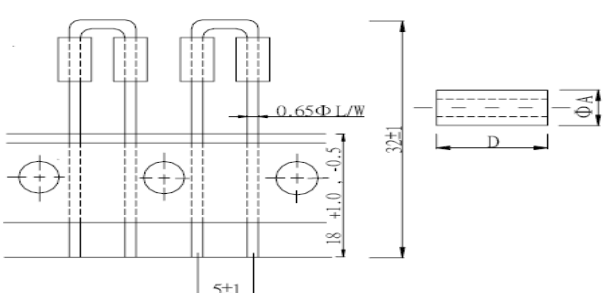


SPECIFICATION FOR APPROVAL

CUSTOMER :				DATE :	
PART NO : RHWT035060×2				DWG.NO : CT1112091	
CUSTOMER PART NO :				CUST.DWG.NO :	
(1)DIMENSION(UNIT:mm) <div style="text-align: center; margin-top: 20px;">  </div>				A	3.5 ± 0.15 m/m
				D	6.0 ± 0.30 m/m
				E	m/m
				F	m/m
				P	m/m
				H	m/m
				I	m/m
				J	m/m
				K	m/m
				L	m/m
(2)ELECTRICAL REQUIREMENTS					
Z	MIN	70 OHM	TEST FREQ	25 MHz	
Z	MIN	130 OHM	TEST FREQ	100 MHz	
Z	MIN	OHM	TEST FREQ	MHz	
Z	MIN	OHM	TEST FREQ	MHz	
TEST INSTRUMENTS					
HP-4286A					
WIRE	φ 0.65×63mm			APPROVED BY 吳載敏	
				CHECKED BY 張明德	
WINDING	1 TS			DRAWN BY 黃慧診	

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER :					DATE :				
PART NO : RHWT035060×2					DWG.NO : CT1112091				
CUSTOMER PART NO :					CUST.DWG.NO :				
IMPEDANCE					DIMENSION (UNIT : mm)				
FREQ	25 MHz	100 MHz			A	D			
SPEC	MIN 70 OHM	MIN 130 OHM			3.5 ± 0.15	6.0 ± 0.30			
1	91.00	172.0			3.55	6.00			
2	90.00	170.0			3.55	6.09			
3	89.00	167.0			3.53	6.01			
4	89.00	165.0			3.55	6.07			
5	90.00	168.0			3.55	6.06			
6	91.00	175.0			3.55	6.06			
7	91.00	172.0			3.55	6.09			
8	91.00	165.0			3.57	6.09			
9	90.00	171.0			3.54	6.01			
10	90.00	164.0			3.55	6.04			
X	90.2	168.9			3.55	6.05			
R	2	11			0.04	0.09			
						APPROVED BY 吳載敏			
						CHECKED BY 張明德			
						DRAWN BY 黃慧診			

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw