


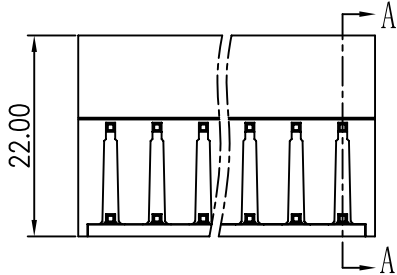
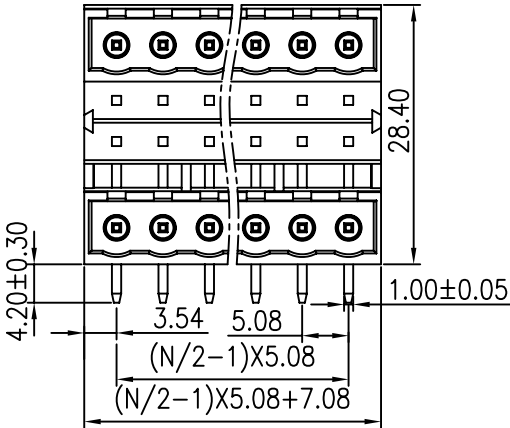


注：盖与座需超音波焊接

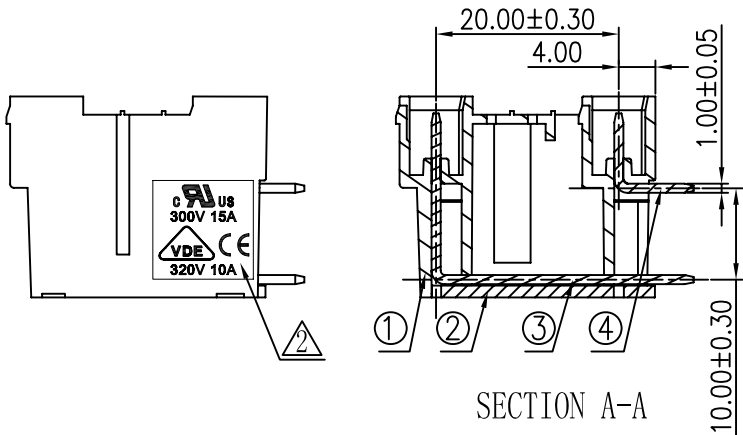

Notes:

- 1.Pitch:5.08mm ,Poles:4-48P
- 2.Rated voltage/current:UL 300V/15A
VDE 320V/10A
- 3.Operation temperatures:-40℃~+105℃
- 4.Withstanding Voltage:AC2000V/1Min
- 5.Insulation Resistance:5000MΩ/DC1000V
- 6.Undimensioned Tolerances:

Pitch range in mm				Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150			
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10		

4	2EDGRH Pin header(short)	1061B00030(H)	XX/2	Brass	SnCe
3	2EDGRH Pin header(long)	1061B00010(H)	XX/2	Brass	SnCe
2	2EDGRH-5.08 Cover	1062C0YXXA(H)	1	PA66	UL94V-0

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		品名、料号增加环保标示“(H)”	LJH	12/11/07
△		增加VDE刻字及参数	Zengy	12/08/08

1	2EDGRH-5.08 Housing	1062A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
<div><div><div>← MM (INCH) →</div><div>DATE 06/24/06"</div><div>TOLERANCES EXCEPT AS NOTED</div><div>MM .0 ± .00 ± .000 ±</div><div>ANGLES ± 1°</div><div>THIRD ANGLE PROJECTION</div></div><div><div>DFTO 2/mm</div><div>CHKD</div><div>MFO</div><div>APPVL</div><div>G.E :</div><div>FINISH :</div><div>SCALE :</div></div><div><div>DATE</div><div>DATE</div><div>DATE</div><div>MATERIAL :</div></div></div>					
<div><div>DEGSON</div><div>DEGSON ELECTRONICS CO., LTD</div><div>NAME</div><div>2EDGRH-5.08-XXP-1Y-00A(H)</div><div>DRAWING NO. 2EDGRH-5.08-E01</div><div>/PART NO.</div><div>DO NOT SCALE DRAWING</div><div>SHEET 1 OF 1</div></div>					
<div><div>SIZE A3</div><div>REV T2 12/08/08</div></div>					