


REVISION RECORD					
REV	ECD	DESCRIPTION	DRFT	DATE	
01	0000	增加L 28mm的筋, 倒角0.3mm	YHG	08/14/08*	
02	0000	螺丝由铜改为黄铜	YHG	09/19/08*	
03	0000	方块由PC10-PC10方块变为PC10方块	YHG	09/19/08*	
04	0000	增加V形刻字	YHG	10/22/08*	
10	0102	版面整理	Lasting	09/11/10*	

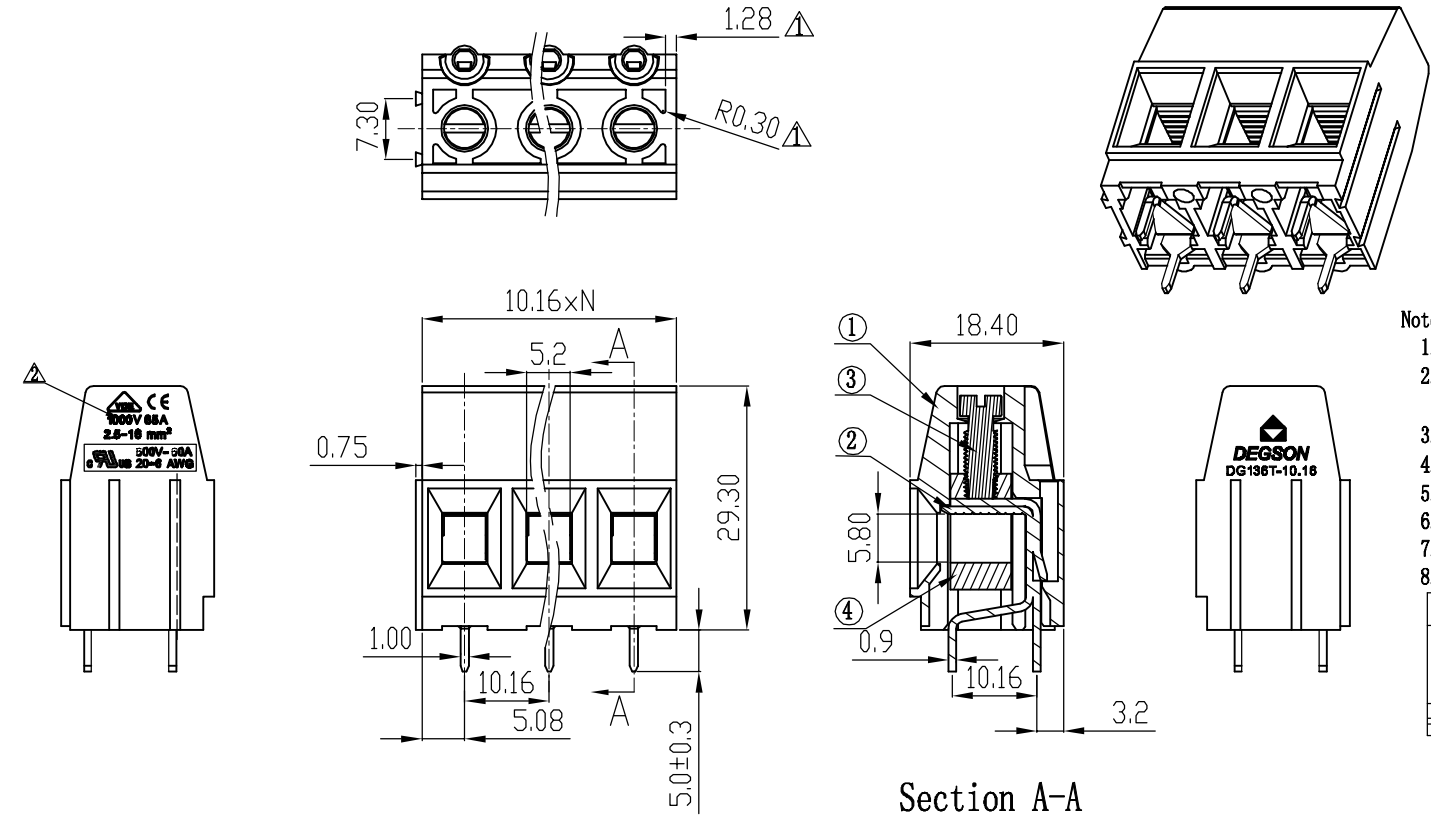

- Notes:
1. Pitch:10.16mm, Poles:2P-XXP
 2. Rated voltage/current:UL 600V/52A
IEC 690V/65A
 3. Insulation resistance: 5000MΩ/DC1000V
 4. Withstanding voltage : AC3000V/1Min
 5. Temp. Range : -40° C~+105° C
 6. Wire Range:20-6AWG, 16.0mm²
 7. Max. Torque Value:M4, 12.24kgf.cm
 8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1
							0.05/0.10

4	PC10 Brass Cage	X000000910(H)	XX	Brass	Ni plated
3	PC6 M4-Screw	S000001490(H)	XX	Brass	Ni plated
2	DG136T Pin header	4115B00010(H)	XX	Copper	SnCe

1	DG136T Housing	4115A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETAILED LISTS	MM (INCH)	DATE 06/11/08*	NAME DG136T-10.16-XXP-1Y-00A(
	TOLERANCES EXCEPT AS NOTED	DATE			
	MM	DATE			
	.00 ±	DATE			
	.000 ±	DATE			
ANGLES ± 1°		G.E :	DRAWING NO. DG136T-10.16-E01		
THIRD ANGLE PROJECTION		FINISH:			
		SCALE : 1:1	DO NOT SCALE DRAWING		
			SHEET 1 OF 1		