



Notes:

1. Pitch: 5.0mm, Poles: 2-12P
2. Rated voltage/current: UL 300V/15A
VDE 250V/22A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2000V/1min
5. Insulation Resistance: 5000M, DC1000V
6. Wire Range: 22-12AWG, 0.5-2.5mm²
7. Max. Torque Value: M2.5, 4.08kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150 to 200	over 200 to 250	
to 6	±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0
to 10								0.05/10

3	DG167 Screws	S000001530(H)	XX	Steel	Cr ³⁺ Zn
2	DG167R Spring	4023B00010(H)	XX	Brass	SnCe

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing Revise	Haoyh	03/21/06
△		修改刻字	CSX	05/08/06
△		增加UL刻字	CSX	06/20/07
△		品名、料号增加环保标示“(H)”	CSX	12/10/07
△		VDE额定电流由20A改为22A	Zengy	08/28/08

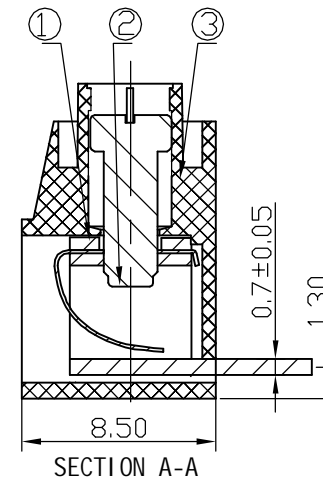

1	DG167R-5.0-Housing	4023A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS					
TOLERANCES EXCEPT AS NOTED		DATE 07/19/04	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		
MM		CHKD			
TOLERANCES EXCEPT AS NOTED		DATE			
TOLERANCES EXCEPT AS NOTED		DATE			
TOLERANCES EXCEPT AS NOTED		DATE	NAME		
TOLERANCES EXCEPT AS NOTED		DATE	DG167R-5.0-XXP-1Y-00A(H)		
TOLERANCES EXCEPT AS NOTED		DATE	DRAWING NO. DG167R-5.0-E01		
TOLERANCES EXCEPT AS NOTED		DATE	/PART NO.		
TOLERANCES EXCEPT AS NOTED		DATE	DO NOT SCALE DRAWING		
TOLERANCES EXCEPT AS NOTED		DATE	SHEET 1 OF 1		