
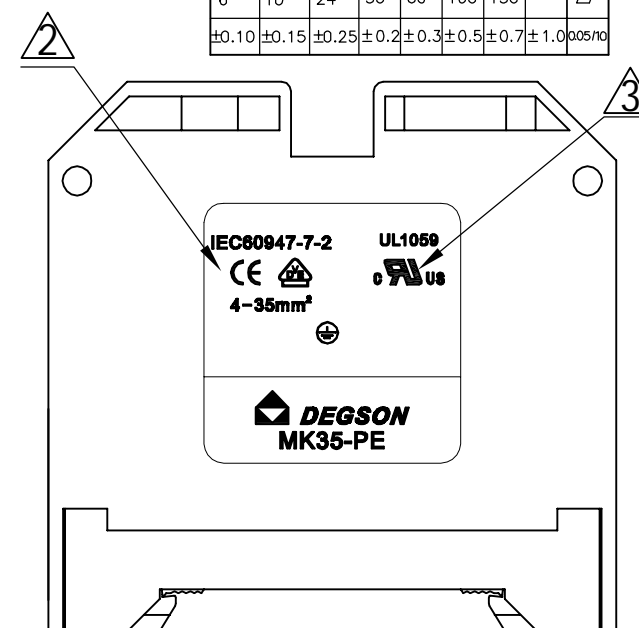
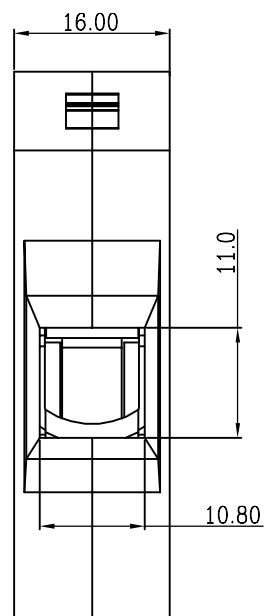
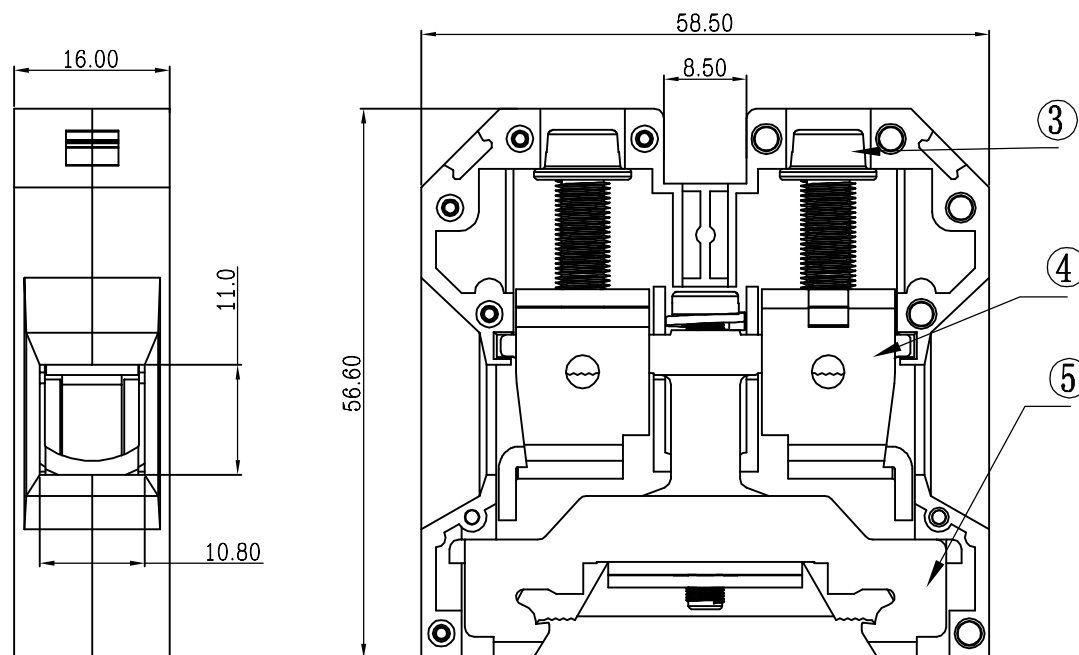


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
①		品名、料号增加环保标示“(H)”	LJH	12/10/07	
②		增加VDE刻字及参数	Zengy	09/10/08	
③		增加UL刻字	HD	10/21/09	
④	10-0346	方块品名与材料更新	HD	10/11/10	

Notes:

1. Thickness: 16mm
2. Wire Range: 8~2AWG , 4~35mm<sup>2</sup>
3. Max. Torque Value: M6 , 25.5kgf.cm
4. Operation temperatures: -40℃~+105℃
5. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						—
to	over	over	to	over	over	over	over	over	∩
6	6 to 10	10 to 24	30	30 to 60	60 to 100	100 to 150	150	150	□
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	±0.05/10	

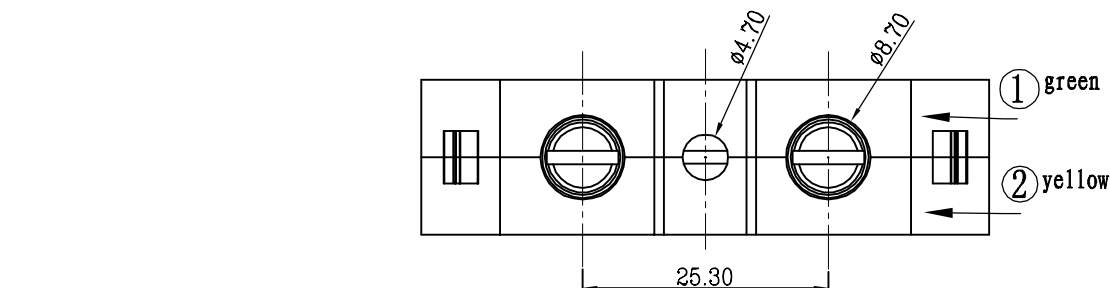

5	MK35-PE-Ground contact	6049B00010 (H)	1		
4	MK35-Cage ④	X000001380 (H)	2	Iron ④	Cr <sup>3+</sup> Zn
3	MK35-PE-Screw	S000002030 (H)	2	Steel	Cr <sup>3+</sup> Zn

2	MK35-PE-Housing	6049A0801A (H)	1	PA66	UL94V-0	
1	MK35-PE-Housing	6049A0401A (H)	1	PA66	UL94V-0	
ITEM		NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	<div>MM (INCH)</div>		DFTD LIN	DATE 06/01/07		
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
			MFD	DATE		
			APPVL	DATE		
			MATERIAL :			
	ANGLES ± 1°		G.E :			
			FINISH:			
	THIRD ANGLE PROJECTION		SCALE : 1:1			
	<div>DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div>					
	<div>NAME MK35-PE-01P-1Y-00A (H)</div>					
DRAWING NO. MK35-PE-E01				SIZE	REV	
/PART NO.				A3	T4 10/11/1	
DO NOT SCALE DRAWING				SHEET 1	OF 1	