
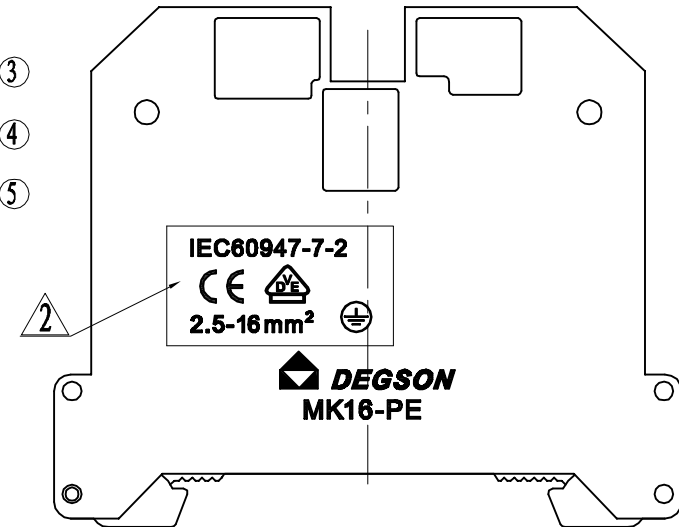


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		品名、料号增加环保标示" (H) "	LJH	12/10/07*
△		增加VDE刻字及参数	WLM	07/18/08*

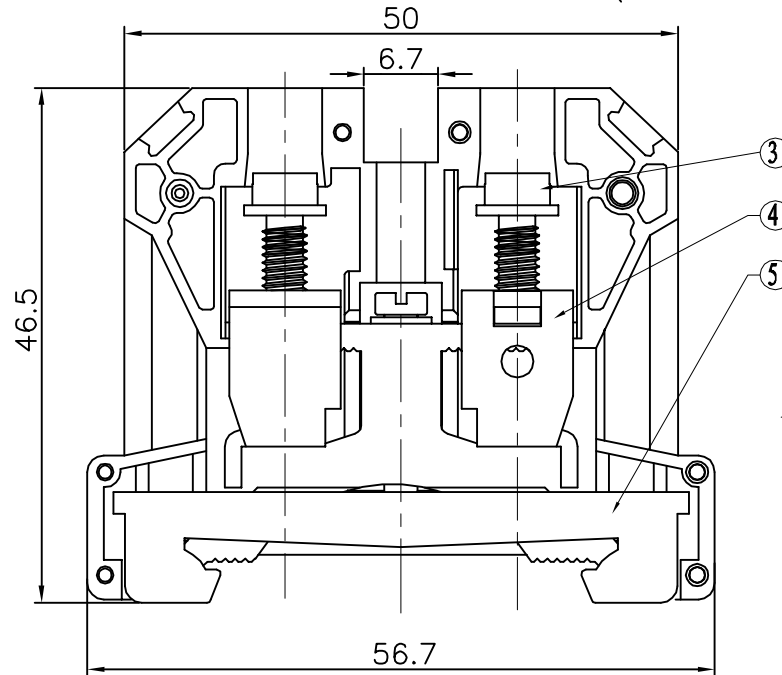

#### Notes:

1. Operation temperatures:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
2. Insulation Withstand Voltage: AC3000V/1min
3. Insulation Resistance:  $5000\text{M}\Omega/\text{DC1000V}$
4. Wire Range: 12~6AWG, 2.5~16mm<sup>2</sup>
5. Max. Torque Value: M4, 12.24kgf.cm
6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	MK 16-PE-Ground contact	6048B00010(H)	1		
4	MK 16-PE-Cage	X000001160(H)	2	Brass	Cr <sup>3+</sup> Zn
3	MK 16-PE-Screw	S000001890(H)	2	Steel	Cr <sup>3+</sup> Zn

2	MK 16-PE-Housing	6048A0801A(H)	1	PA66	UL94V-0
1	MK 16-PE-Housing	6048A0401A(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DFTO Zhuwm	DATE 06/29/'06	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
		MFO	DATE		
		APPVL	DATE		
		MATERIAL :			
ANGLES ± 1°		G.E :		NAME MK 16-PE-01P-1Y-00A (H)	
THIRD ANGLE PROJECTION		FINISH :		DRAWING NO. MK 16-PE-E01	
		SCALE : 1:1		DO NOT SCALE DRAWING	
				SHEET 1 OF 1	