
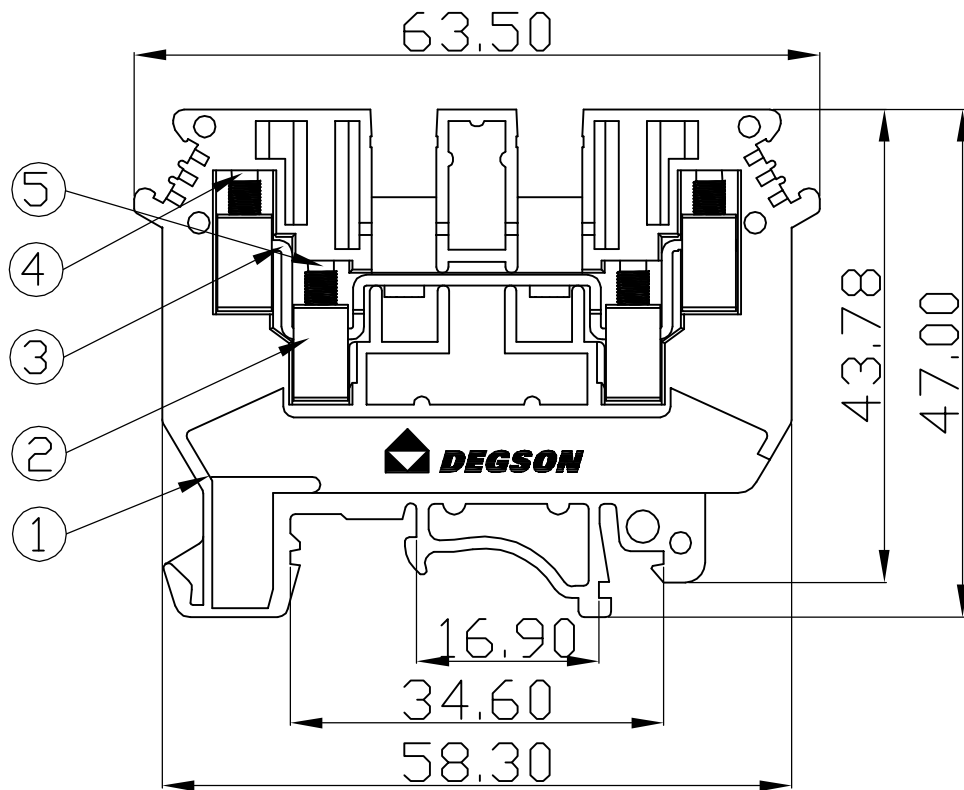



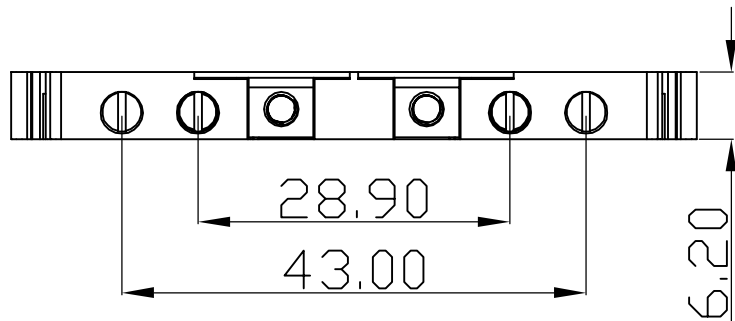


5	PCDK 2.5 M3"-Screw	S000002580 (H)	2	Brass	Ni Plated
4	PC 2.5B M3"-Screw	S000001100 (H)	2	Brass	Ni Plated
3	PCDK 4-Current Carrier	6117B00010 (H)	1	Copper	SnCe Plated
2	PCDK 4-Brass Cage	X000001840 (H)	4	Brass	Ni Plated

Notes:

- Rated voltage/current:UL 300V/30A
VDE 630V/32A
- Operation temperatures:-40° C~+105° C
- Withstanding Voltage: AC3000V/1Min
- Insulation Resistance:5000M Ω /DC1000V
- Wire Range: 24~10AWG 0.2~4mm²
- Max. Torque Value:M3, 5.1kgf.cm
- Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm							—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150			
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10		

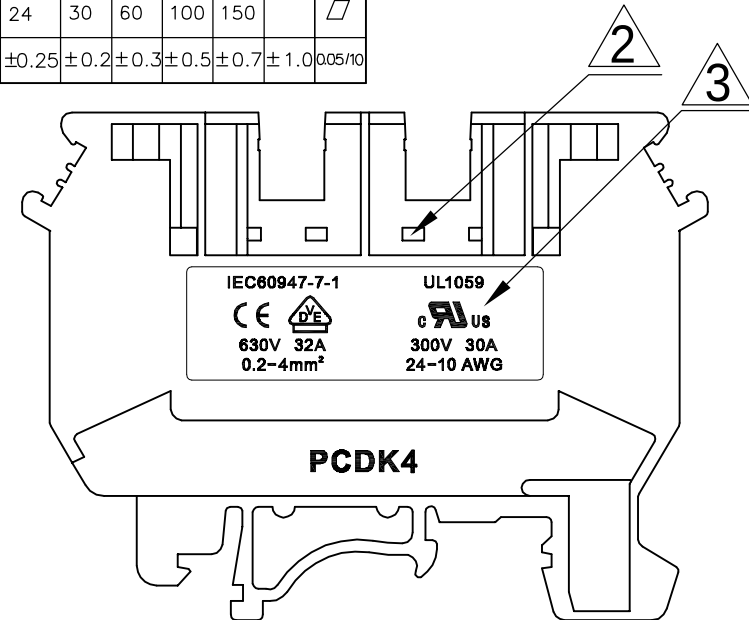

1	PCDK 4-Housing	6117A0Y01A (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DFTD ZYH	DATE 01/11/08	DEGSON 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME PCDK4-01P-1Y-00A(H) DRAWING NO. PCDK4-E01 /PART NO. DO NOT SCALE DRAWING	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM	MFD	DATE		
	.0 ±	APPVL	DATE		
	.00 ±	MATERIAL			
	.000 ±	ANGLES ± 1°	G.E	SIZE T3 REV 03/31/09	
		THIRD ANGLE PROJECTION	FINISH:		
			SCALE :		
				SHEET 1	OF 1

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		增加VDE刻字及参数	WLM	07/21/08'
△		图面更新	WLM	11/03/08'
△		增加UL及参数刻字	Zengy	03/31/09'