


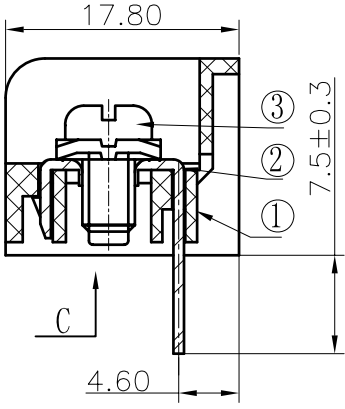


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
1		产品名称由DG46A变更为DG46S	WF	02/21/06*	
2		增加UL刻字	CSX	09/30/06*	
3		增加R0.9半圆柱特征	Mickey	06/05/09*	

NOTES:

- 1. Pitch:9.5mm , Poles:2p-26p;
- 2. Rated: 300V/20A;
- 3. Temp. Range: -40° C ~+105° C;
- 4. Withstand Voltage: AC2000V/1Min;
- 5. Wire Range: 22-12AWG;
- 6. Insulation Resistance: 500MΩ/DC500V;
- 7. Max. Torque Value: 12.24Kgf.cm
- 8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	to	over	
6	6 to 10	10 to 24	24 to 30	30 to 90	90 to 200	200 to 480	480 to	—
±0.10	±0.15	±0.25	±0.1	±0.2	±0.3	±0.5	±0.7	0.05/0.1

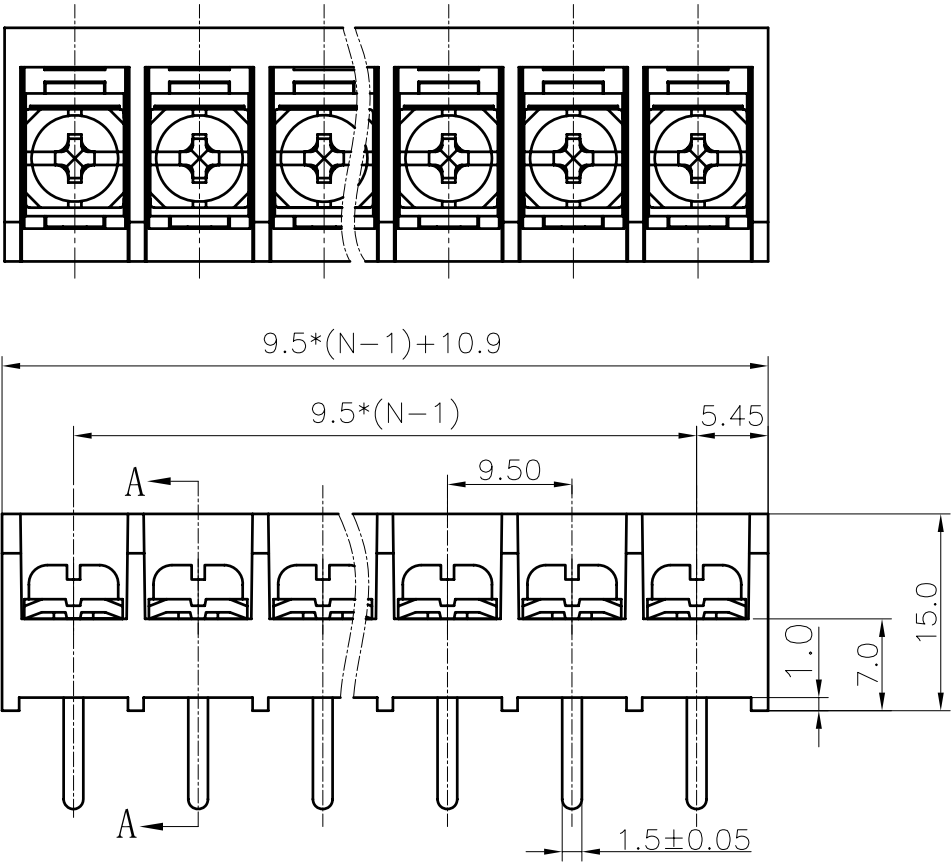

3	M4*8 (7.5*7.5) bright screws	S000000570 (H)	XX	Steel	Ni plated
2	DG46S Pin header	5012B00030 (H)	XX	Brass	SnCe

1	DG46S-B Housing	5012A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
<div>DEGSON 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div>					
NAME DG46S-B-XXP-1Y-00A (H)					
DRAWING NO. DG46S-E14				SIZE A3	REV T3
/PART NO.				06/05/09*	
DO NOT SCALE DRAWING				SHEET 1	OF 1