

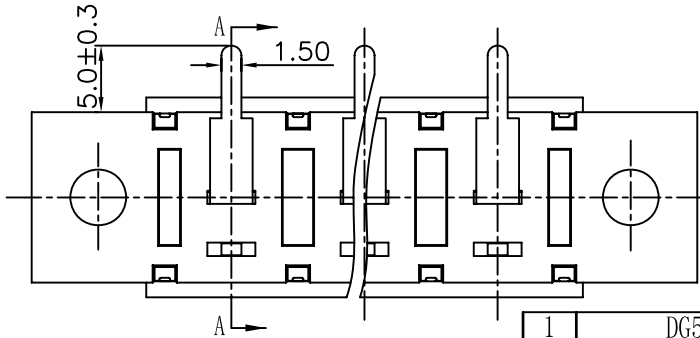


SECTION A-A



REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		增加UL刻字	CSX	03/13/07
2		品名、料号增加环保标识“06”	Ye j	12/08/07

Notes:

1. Pitch:10mm , Poles:2-20P
2. Rated current:20A
3. Rated voltage:300V
4. Operation temperatures:-40° C~+105° C
5. Insulation Withstand Voltage:AC2000V/Min
6. Insulation Resistance:500MΩ/DC500V
7. Wire Range:22~14AWG
8. Max. Torque Value:12.24kgf.cm
9. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm		
to 6	over 6 to 10	over 10 to 24	over 24 to 30	over 30 to 60
±0.10	±0.15	±0.25	±0.2	±0.3
			±0.5	±0.7
				±1.0
				±0.05/0.10

4	DG58-Cover	5008C07XXA(H)	1	PC	
3	DG58R Pin header	5008B00060(H)	XX	Brass	SnCe plated
2	M4*8(7.5*7.5)bright Screws	S000000570(H)	XX	Steel	Ni plated

1	DG58-A Housing	5008M0YXXA(H)	1	PA66+23%GF	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO Zhuwm	DATE 01/13/06"	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
MM (INCH)		CHKD	DATE		
MFO		DATE			
APPVL		DATE			
MATERIAL :		NAME		DG58R-A-XXP-1Y-00A(H)	
ANGLES ± 1°		G.E :		DRAWING NO. DG58R-E01	
THIRD ANGLE PROJECTION		FINISH :		/PART NO.	
SCALE : 1:1		DO NOT SCALE DRAWING		SHEET 1 OF 1	