
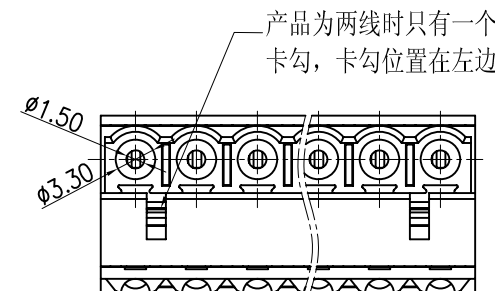
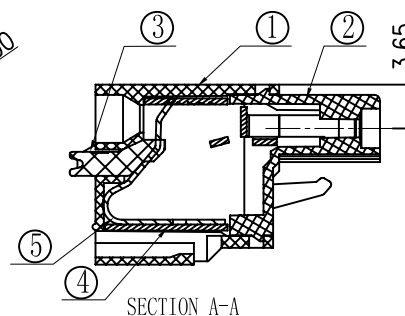
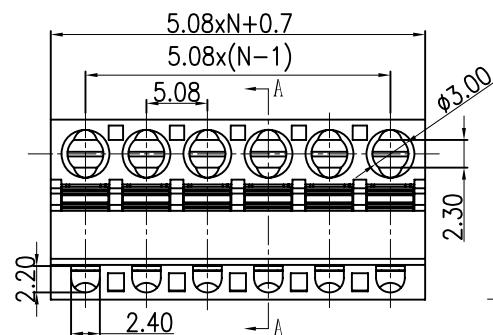
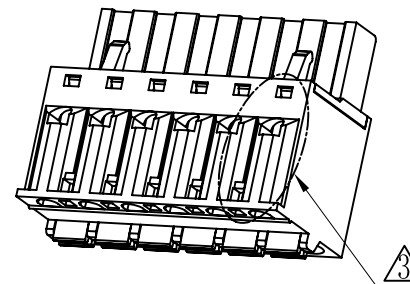




REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		品名、料号增加环保标示“00”	LJH	12/11/07
△		增加UL刻字	Zengy	01/06/10
△	0-0262	修改外型	HXG	08/16/10
△	0-0032	弹片由X000001320变更为X00004810	Apple	09/30/10

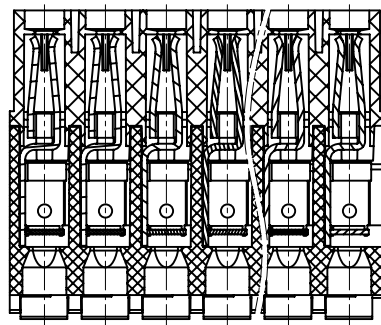

Notes:

1. Pitch: 5.08mm Poles: 2P-16P
2. Rated voltage/current: UL 300V/10A
IEC 250V/20A
3. Operation temperatures: -40° C ~ +105° C
4. Withstanding Voltage: AC2500V/1min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Wire Range: 26~12AWG 2.5mm²
7. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					
to	over	to	over	to	over	to	
6	6 to 10	10 to 24	24 to 30	30 to 60	60 to 100	100 to 150	150 to
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

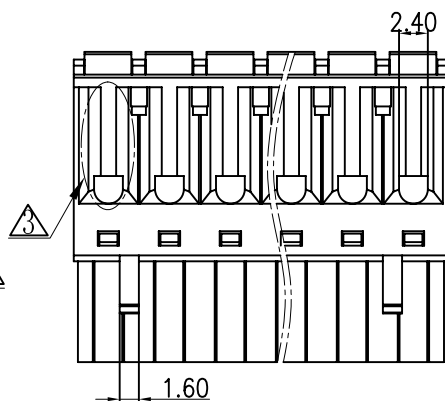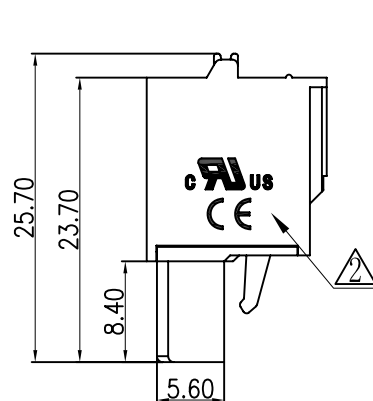

5	2EDGKD-5.08-Spring	X000004810 (H)	XX	Stainless steel	
4	2EDGKD-5.08-Clamp	1085B00010 (H)	XX	Phosphor bronze	SnCe
3	2EDGKD-5.08-Button	1085D0501A (H)	XX	PA66	UL94V-0
2	2EDGKD-5.08-Cover	1085C0YXXA (H)	1	PA66	UL94V-0

1	2EDGKD-5.08-Housing	1085A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DFTO Apple	DATE 10/20/06"	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME 2EDGKD-5.08-XXP-1Y-00A(H) DRAWING NO. 2EDGKD-5.08-E01 /PART NO. DO NOT SCALE DRAWING SHEET 1 OF 1	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM	MFO	DATE		
	.0 ±	APPVL	DATE		
	.000 ±	MATERIAL :			
ANGLES ± 1°		G.E :		SIZE REV T3 29/30/10"	
THIRD ANGLE PROJECTION		FINISH :			
		SCALE : 1:1			