

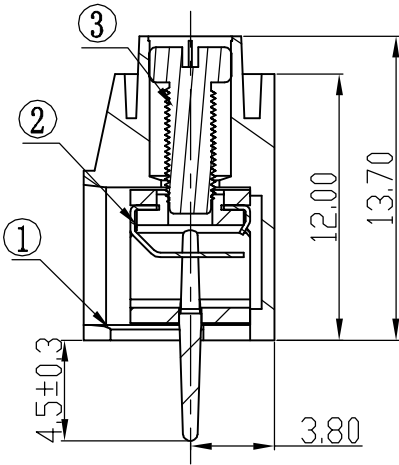


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		增加UL, VDE, CE刻字	Zengy	09/09/08

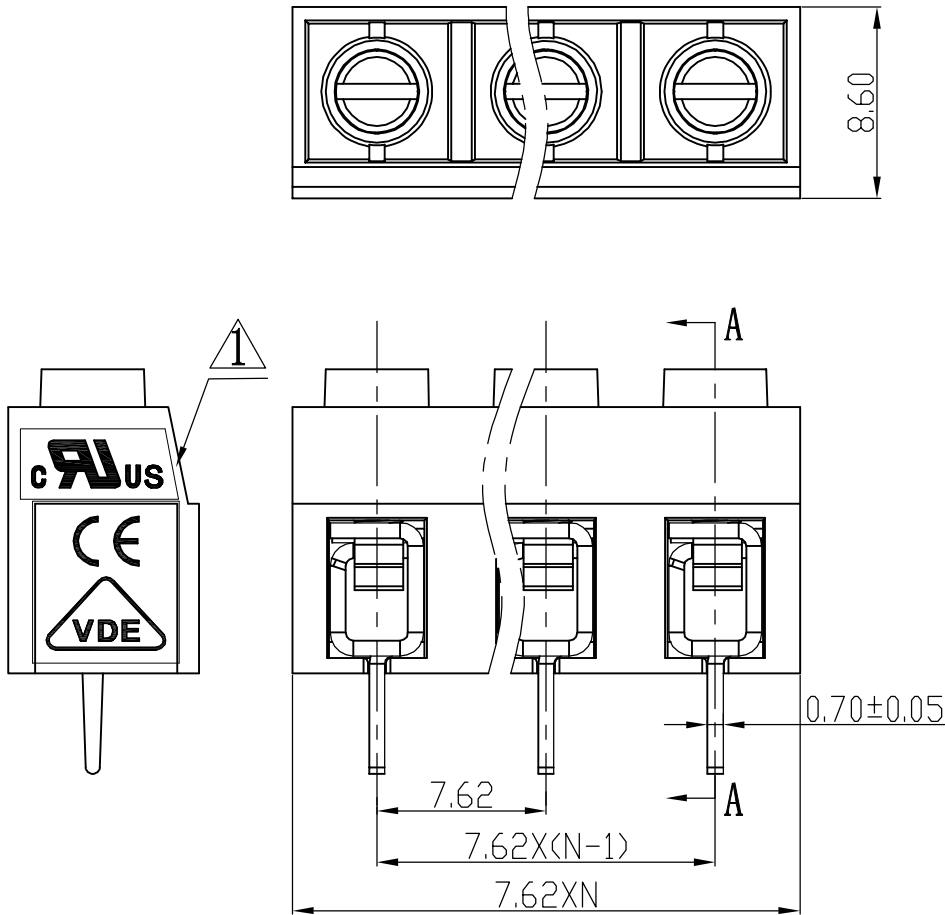



SECTION A-A

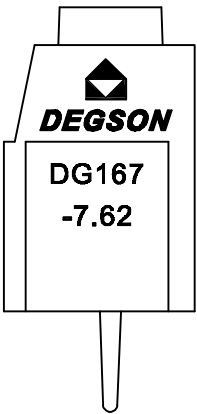

Notes:

1. Pitch: 7.62mm, Poles: 2-12P
2. Rated voltage/current: UL 300V/15A  
VDE 450V/22A
3. Operation temperatures: -40℃~+105℃
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Wire Range: 22~12AWG, 0.5~2.5mm<sup>2</sup>
7. Max. Torque Value: M2.5, 4.08kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150			
to 6	±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	DG167 Screws	S000001530 (H)	XX	Steel	Cr Zn		
2	DG167 Pin header	4022B00010 (H)	XX	Brass	SnCe		
1	DG167-7.62 Housing	4088A0YXXA (H)	1	PA66	UL94V-0		
ITEM		NAME OF PART		NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)		DFTD LIN	DATE 04/08/07	<div> 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div>		
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE			
			MFD	DATE			
			APPVL	DATE			
	MM				NAME DG167-7.62-XXP-1Y-00A(H)		
	.0 ±						
	.00 ±				DRAWING NO. DG167-7.62-E01		
	.000 ±						
	ANGLES ± 1°		G.E :		/PART NO.		
			FINISH:				
		SCALE : 1:1		DO NOT SCALE DRAWING			
THIRD ANGLE PROJECTION				SHEET 1 OF 1			