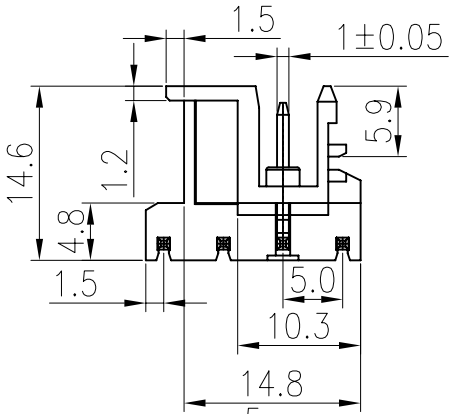
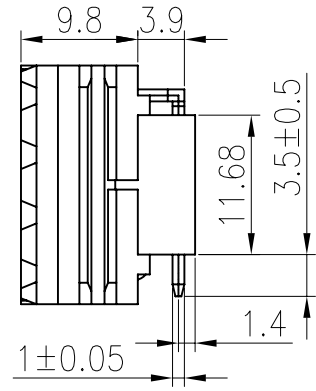
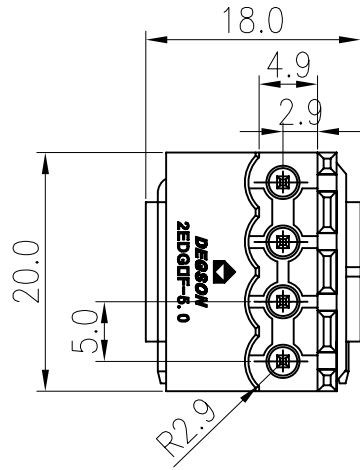



REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		品名、料号增加环保标示“(H)”	LJH	12/11/07*
△	10-0177	增加UL刻字	Jordan.Y	06/10/10*

Notes:

- 1. pitch: 5.0mm poles:4p
- 2. Rated voltage: 300V
- 3. Rated current: 15A
- 4. Withstanding voltage: AC2000V/1Min
- 5. Insulation resistance: 5000MΩ/DC1000V
- 6. Temp. Range: -40° C~+105° C
- 7. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					
	over 6	over 10	over 30	over 60	over 100	over 150	—
to 6	to 10	to 24	to 30	to 60	to 100	to 150	∩
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0 0.05/10

5	2EDGRF-5.0 pin4	1090B00040 (H)	1	Brass	SnCe
4	2EDGLF-5.0 pin3	1090B00060 (H)	1	Brass	SnCe
3	2EDGRF-5.0 pin1	1090B00010 (H)	1	Copper	SnCe
2	2EDGLF-5.0 pin2	1090B00050 (H)	1	Brass	SnCe

1	2EDGRF-5.0-04P-Housing		1090A0Y04A (H)		1	PA66	UL94V-0
ITEM	NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES
DETACHED LISTS	← MM (INCH) →		DFTO Yangys		DATE 05/07/07*		
	TOLERANCES EXCEPT AS NOTED		CHKD		DATE		
			MFO		DATE		
			APPVL		DATE		
	MM		MATERIAL :		NAME 2EDGRF-5.0-04P-1Y-00A (H)		
	.0 ± ±						
	.00 ± ±						
	.000 ± ±						
	ANGLES ± 1°		G.E :				
	FINISH :		SIZE				
		SCALE : 1:1		/PART NO.		A3	REV T2
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING		SHEET 1		OF 1	
DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD							