

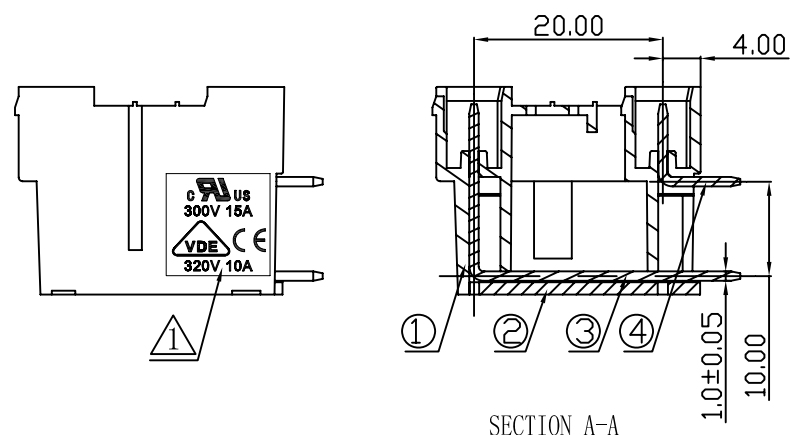
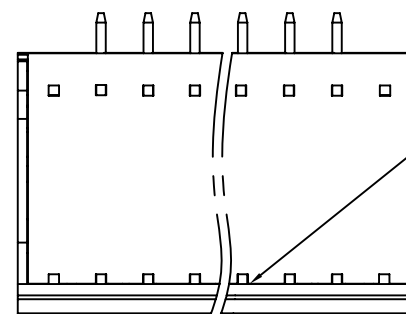



REVISION RECORD					
REV	ECD	DESCRIPTION	DRFT	DATE	
△		修改刻字	Zengy	12/09/08	

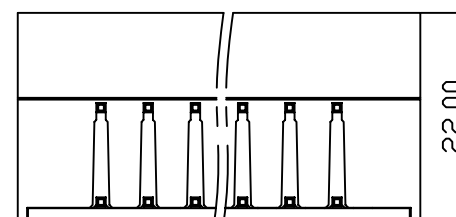

SECTION A-A

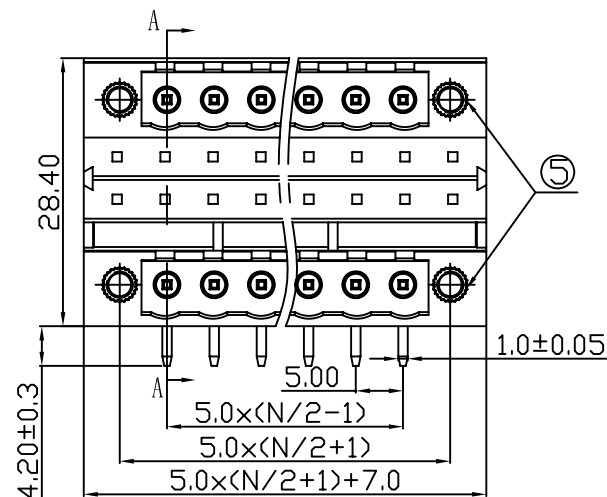

注：盖与座需超音波焊接

Notes:

- Pitch: 5.0mm, Poles: 4-48P
- Rated voltage/current: UL 300V 15A
VDE 320V 10A
- Operation temperatures: -40°C ~ +105°C
- Withstanding Voltage: AC2000V/1Min
- Insulation Resistance: 5000MΩ/DC1000V
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/0

5	2EDGRH Screw	S000000040 (H)	4	Brass	
4	2EDGRH Pin header (short)	1061B00030 (H)	XX/2	Brass	SnCe
3	2EDGRH Pin header (long)	1061B00010 (H)	XX/2	Brass	SnCe
2	2EDGRH-5.0 Cover	1061C0Y (XX+4) A (H)	1	PA66	UL94V-0

1	2EDGR(V)HM-5.0 Housing	1076A0YXXA (H)	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES	
DETACHED LISTS	<div>MM (INCH)</div>		DFTD ZYH		DATE 10/25/08*	
	TOLERANCES EXCEPT AS NOTED		CHKD		DATE	
			MFD		DATE	
			APPVL		DATE	
	MM .0 ± .00 ± .000 ±		± ± ±			
	MATERIAL :					
	ANGLES ± 1°		G.E :			
			FINISH:			
	THIRD ANGLE PROJECTION		SCALE : 1:1			
<div>NAME</div> <div>2EDGRHM-5.0-XXP-1Y-00A(H)</div>			DRAWING NO. 2EDGRHM-5.0-E01		SIZE A4	REV T1 12/09/08*
			/PART NO.			
			DO NOT SCALE DRAWING			SHEET 1