
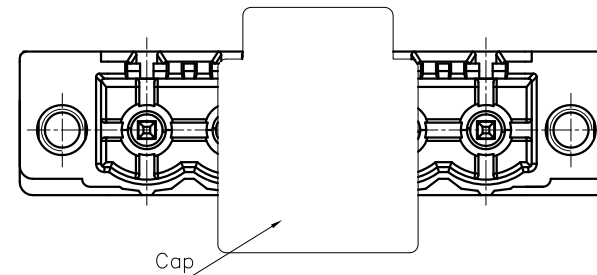


## REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

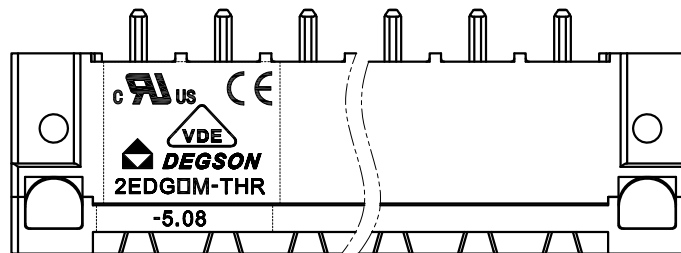

## NOTES1:

UL Standard

- Rated voltage/current : 300V / 15A
- Withstanding voltage : AC1600V/1Min.

IEC Standard

1.

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	4.0KV
Rate voltage(V)	320V
Rate current(A)	20A

## NOTES2:

- Dimension shall be interpreted per ASME Y14.5-2009
- Pitch : 5.00/5.08mm, Poles : N=02~12P
- Operating temperature: -40°C~+130°C
- Undimensioned tolerances:




Pitch range in mm		Nominal dimension range in mm					
Over 6 TO 10	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10	±
±0.15	±0.20	±0.30	±0.40	±0.70	±1.00	±1.30	±2°

5.RoHS Compliance

2EDGVM-THR - 5.00/5.08 - XXP - 1Y - 00A (H)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey) 3.(Black) 5.(Orange)

(RoHS) 00A-(Standard)

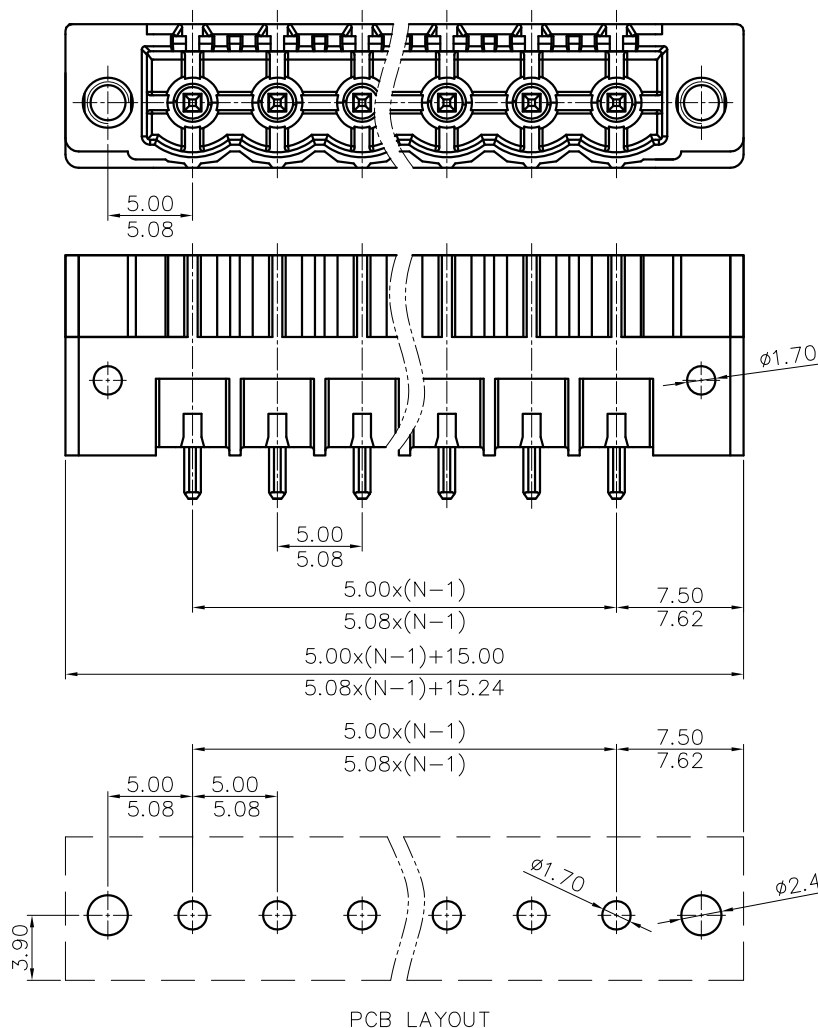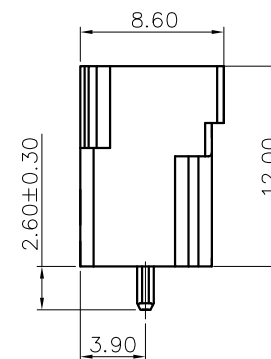

PCB LAYOUT

DETACHED LISTS	PART NO.:	NINGBO DEGSON ELECTRONICS CO., LTD		
	APPD:	NAME: 2EDGVM-THR-5.00/5.08-XXP-1Y-00A(H)		
	CHKD:	TITLE: CUSTOMER DRAWING		
	DRFT:	REV: /		
THIRD ANGLE PROJECTION		DRAWING NO.:	SHEET	DO
		MM (INCH)	1/1	1/1
		DO NOT SCALE DRAWING	SCALE	1:1