




02P



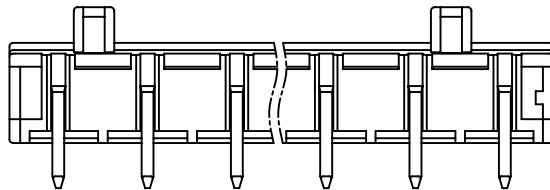


03P

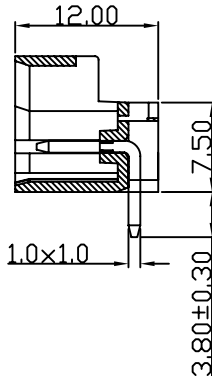

- Notes:
1. Pitch: 7.5mm , Poles: 2-12P
 2. Rated voltage/current: UL1059 300V/15A
IEC 400V/20A
 3. Operation temperatures: -40℃~+105℃
 4. Withstanding Voltage: AC2500V/1Min
 5. Insulation Resistance: 5000MΩ/DC1000V
 6. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
	over 6	over 10		over 30	over 60	over 100	over 150		—
to 6	to 10	to 24	to 30	to 60	to 100	to 150			∩
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	◇

2	8EDGRCB-5.0 Pin header	1203B00020 (H)	XX	Copper	SnCe
1	8EDGVCB-7.5 Housing	1204A41XXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DETACHED LISTS	 MM (INCH)		DFTD HXG	DATE 09/12/09	<div> 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div> <div>NAME 8EDGRCB-7.5-XXP-11-01A(H)</div> <div>DRAWING NO. 8EDGRCB-7.5-E01 /PART NO.</div> <div>SIZE A3 REV TO 02/22/10</div>
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE	
			MFD	DATE	
			APPVL	DATE	
			MATERIAL :		
			G.E :		
			FINISH:		
			SCALE : 1:1		
			DO NOT SCALE DRAWING		
ANGLES ± 1°				SHEET 1	OF 1
					
THIRD ANGLE PROJECTION					