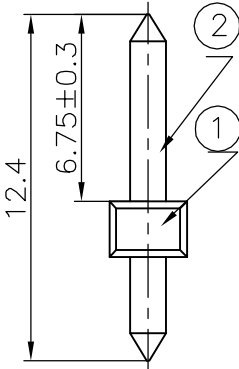
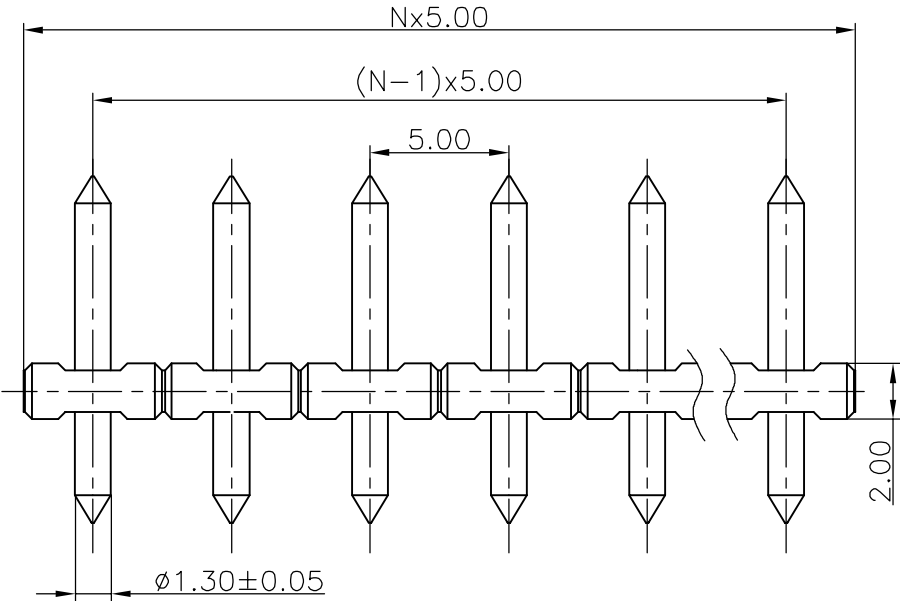



REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		PA66+25%GF代替原PBT料	Haoyh	05/10/11





Material
Pin header: Brass, Tin plated
Housing: PA66+25%GF, UL94V-0
Electrical
Rated voltage: 300V
Rated current: 10A
Contact resistance: 20mΩ
Insulation resistance: 5000MΩ/1000V
Withstanding voltage: AC1500V/1min
Mechanical
Temp, Range: -40° C~+105° C
MAX Soldering: +250° C, for 5 Sec

Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
	over 6	over 10		over 6	over 30	over 90	over 200	—
to 6	to 10	to 24	to 6	to 30	to 90	to 200	to 480	∩
±0.10	±0.15	±0.25	±0.1	±0.2	±0.3	±0.5	±0.7	□



2	DG332-Pin header	4014B00010(H)	XX	Brass	Tin plated	
1	DG332J-5.0-XXP-1Y-00A-Housing	4014A0YXXA (H)	1	△ PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES	
DETAILED LISTS	<div>← MM (INCH) →</div>		DFTO Haoyh	DATE 05/12/05	<div> 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div>	
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
			MFO	DATE		
	<div>MM</div> <div>.0 ±</div> <div>.00 ±</div> <div>.000 ±</div> <div>±</div> <div>±</div> <div>±</div>		APPVL	DATE	NAME DG332J-5.0-XXP-1Y-00A(H)	
			MATERIAL :			
			ANGLES ± 1°			G.E :
	<div></div> <div>THIRD ANGLE PROJECTION</div>		FINISH :	/PART NO.		
	SCALE : 1:1		DO NOT SCALE DRAWING		SHEET 1 OF 1	