

## REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

## NOTES1:

UL Standard

- 1.Rated Voltage/Current : 300V / 15A
- 2.Torque Value : M3 ,4.43 Lb.in
- 3.Wire Range : 24~14AWG

IEC Standard

- 1.Rated Voltage/Current : 250V / 24A
- 2.Torque Value : M3 , 0.5N.m
- 3.Wire Range : 0.5~2.5mm<sup>2</sup>

## NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.08mm, Poles : N=02~24P
- 3.Stripping length : 5~6mm
- 4.Withstanding Voltage : AC1500V/1Min.
- 5.Operating temperature: -40°C~+105°C
- 6.Undimensioned Tolerances:




Pitch range in mm		Nominal dimension range in mm		Nominal dimension range		Tolerance	
Over 6 TO 10	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
						±2°	

## 7.RoHS Compliance

DG104 - 5.08 - XXP - 1Y - 00A (H)

(Series No.) (Pitch) (Poles) (Single Pitch) (RoHS) 00A-(Standard)

(Color):1.(Grey)2.(Blue)3.(Black)4.(Green)5.(Orange)6.(Red)7.(Transparent)8.(Yellow)9.(White)

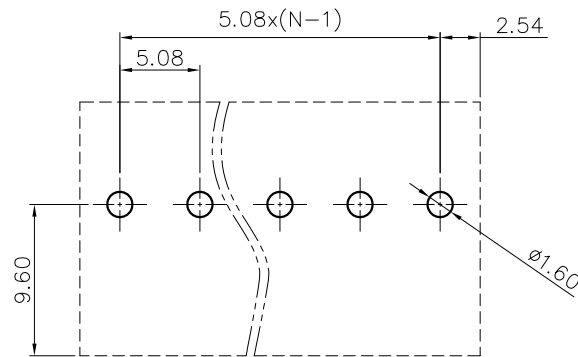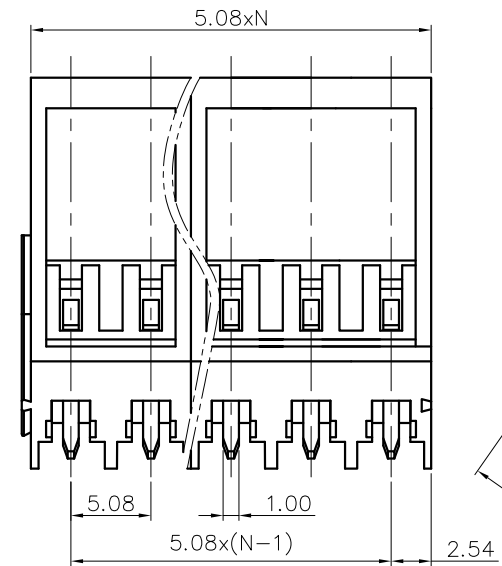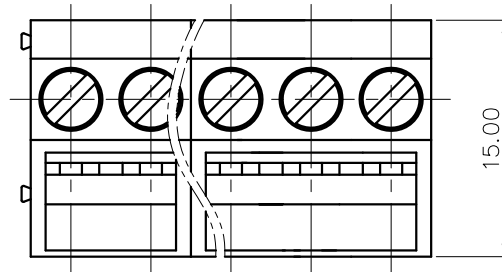

PCB LAYOUT

DETACHED LISTS	PART NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME: DG104-5.08-XXP-1Y-00A(H)			
	CHKD:				
	DRFT:	TITLE: CUSTOMER DRAWING			
THIRD ANGLE PROJECTION		DRAWING NO.:	SHEET 1/1		DO
		MM (INCH)	DO NOT SCALE DRAWING		SCALE 1:1