



- Notes:
- 1. Pitch:5.0mm , Poles:2-12P
  - 2. Rated voltage/current:UL 300V/10A  
IEC 250V/17.5A
  - 3. Operation temperatures:-40℃~+105℃
  - 4. Withstanding Voltage:AC2000V/1Min
  - 5. Insulation Resistance:5000MΩ/DC1000V
  - 6. Wire Range:30~16AWG, 1.5mm<sup>2</sup>
  - 7. Max. Torque Value:M2.5, 4.08kgf.cm
  - 8. Undimensioned Tolerances:

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△1		接线孔大小2.3→2.5	LIN	07/12/07"
△2		料号变更	LIN	07/21/07"
△3		品名、料号增加环保标示“(H)”	CSX	12/10/07"
△4		增加刻字说明	LJH	01/14/08"


Pitch range in mm			Nominal dimension range in mm						
	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150			
to 6	±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

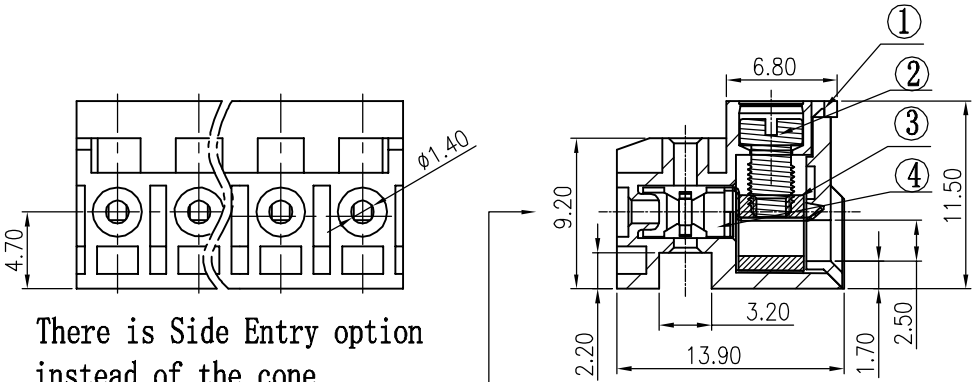

There is Side Entry option instead of the cone

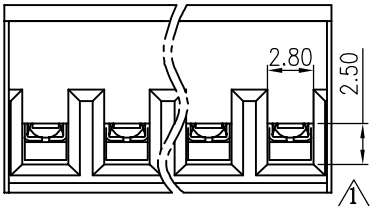

The places of marking in the new mould and old mould is different (新老模刻字位置不同) △4

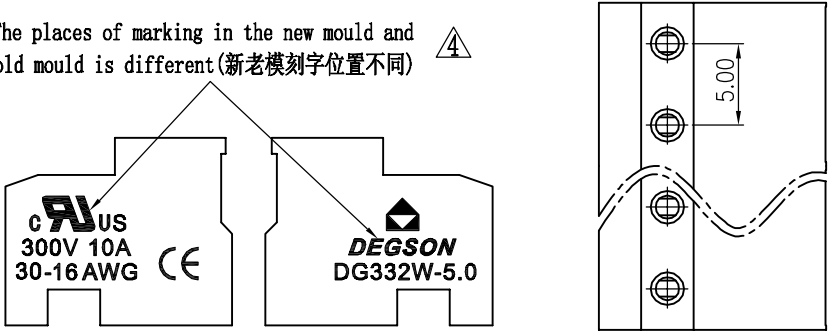

4	DG332W-00A-Clamp	X000001260 (H)	XX	Phosphor bronze	SnCe
3	DG332W-Cage	X000001030 (H)	XX	Brass	Ni plated
2	DG332W-Screw	S000001030 (H)	XX	Steel	Cr <sup>3+</sup> Zn
1	DG332W-00A-Housing	4075A0YXXA (H) △2	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO Alon	DATE 02/21/06"	<b>DEGSON</b> 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
TOLERANCES EXCEPT AS NOTED		MFO	DATE		
TOLERANCES EXCEPT AS NOTED		APPVL	DATE		
TOLERANCES EXCEPT AS NOTED		MATERIAL :		NAME DG332W-5.0-XXP-1Y-00A(H)	
TOLERANCES EXCEPT AS NOTED		G.E :		DRAWING NO. DG332W-5.0-E03	
TOLERANCES EXCEPT AS NOTED		FINISH :		/PART NO.	
TOLERANCES EXCEPT AS NOTED		SCALE : 1:1		DO NOT SCALE DRAWING	
TOLERANCES EXCEPT AS NOTED		SHEET 1		OF 1	