
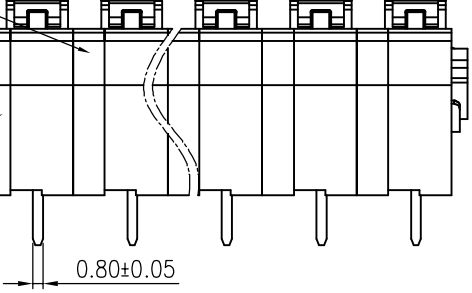
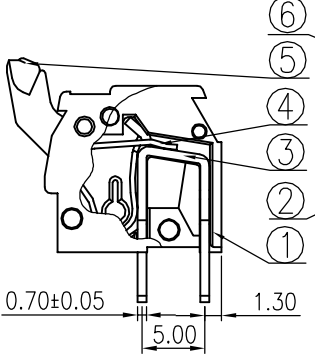
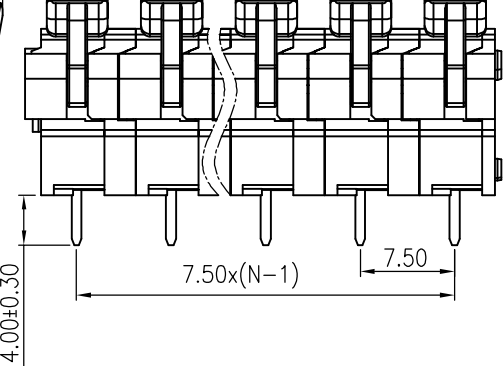
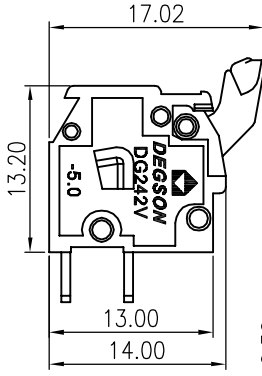


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		修改参数	LJH	12/16/08
△	09-0121	增加VDE刻字及参数	GHY	11/23/09



- Notes:
1. Pitch: 7.5mm, Poles: XXP
 2. Rated voltage/current: UL 300V/15A
VDE 750V/17A △
 3. Operation temperatures: -40℃~+105℃
 4. Withstanding Voltage: AC3000V/1Min
 5. Insulation Resistance: 5000MΩ/DC1000V
 6. Wire Range: 28~12AWG, 0.2~2.5mm²
 7. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm							
to	over	to	over	to	over	to	over	to	
6	10	10	24	30	60	100	150	150	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	□

6	DG242V-7.5-Calpboard	3024H0Y01A (H)	XX-1	PA66	UL94V-0
5	DG242V-Button	3024D1701A (H)	XX	POM	UL94HB
4	DG242V-Shrapnel	X000000990 (H)	XX	Stainless steel	
3	DG242V-Pin header	3024B00010 (H)	XX	Phosphor bronze	SnCe Plated
2	DG242V-Cover	3024C0Y01A (H)	1	PA66	UL94V-0
1	DG242V-5.0-Housing	3024A0Y01A (H)	XX	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

DETAILED LISTS		DFTO LYK		DATE 01/05/07	
TOLERANCES EXCEPT AS NOTED		CHKD		DATE	
		MFO		DATE	
		APPVL		DATE	
MM		MATERIAL :		NAME	
.0 ±				DG242V-7.5-XXP-1Y-00A(H)	
.00 ±				DRAWING NO. DG242V-7.5-E01	
.000 ±				/PART NO.	
ANGLES ± 1°		G.E :		SIZE A3	
THIRD ANGLE PROJECTION		FINISH :		REV T2	
		SCALE : 1:1		11/23/09	
DO NOT SCALE DRAWING				SHEET 1 OF 1	