


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		图面更新	HW	04/11/06*
△		工程变更:去掉电压、电流刻字	WLM	08/13/08*

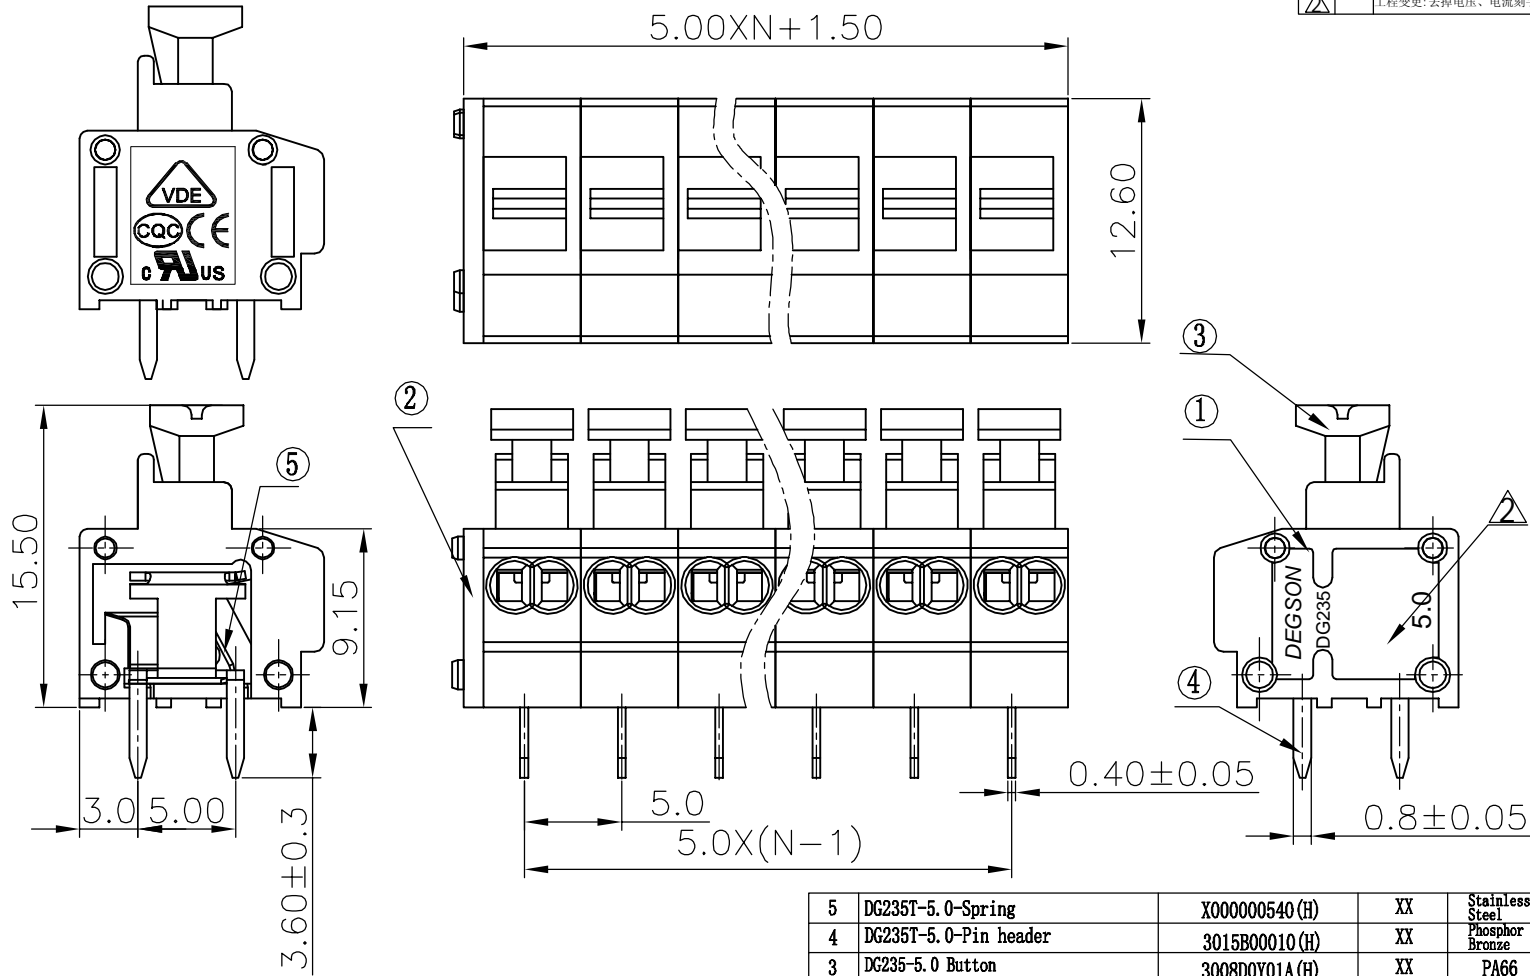

Notes:

1. Pitch: 5.0mm , Poles: XXP
2. Rated voltage/current: UL 300V/5A
VDE 250V/10A
3. Operation temperatures: -40℃ ~ +105℃
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Wire Range: 20~18AWG, 1.5mm²
7. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm							
	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150 to 200	over 200 to 250	over 250 to 300	over 300 to 350	
to 6	to 10	to 24	to 30	to 60	to 100	to 150	to 200	to 250	to 300	1
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	±1.0	±1.0	0.05/10

5	DG235T-5.0-Spring	X000000540 (H)	XX	Stainless Steel	
4	DG235T-5.0-Pin header	3015B00010 (H)	XX	Phosphor Bronze	SnCe plated
3	DG235-5.0 Button	3008D0Y01A (H)	XX	PA66	UL94V-0
2	DG235-5.0 Cover	3008C0Y01A (H)	1	PA66	UL94V-0
1	DG235T-5.0 Housing	3015A0Y01A (H)	XX	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETAILED LISTS					
TOLERANCES EXCEPT AS NOTED		DFTO Haoyh	DATE 08/01/05*	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
MM		CHKD	DATE		
TOLERANCES EXCEPT AS NOTED		MFO	DATE		
MM		APPVL	DATE		
ANGLES ± 1°		MATERIAL :		NAME	
THIRD ANGLE PROJECTION		FINISH :		DRAWING NO. DG235T-5.0-E02	
		SCALE : 1:1		/PART NO.	
				DO NOT SCALE DRAWING	
				SHEET 1 OF 1	