
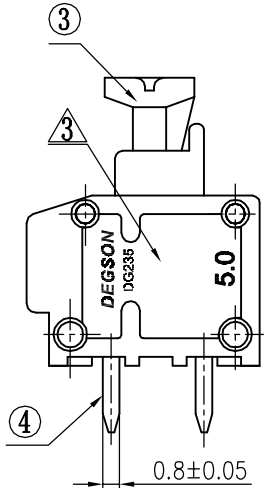
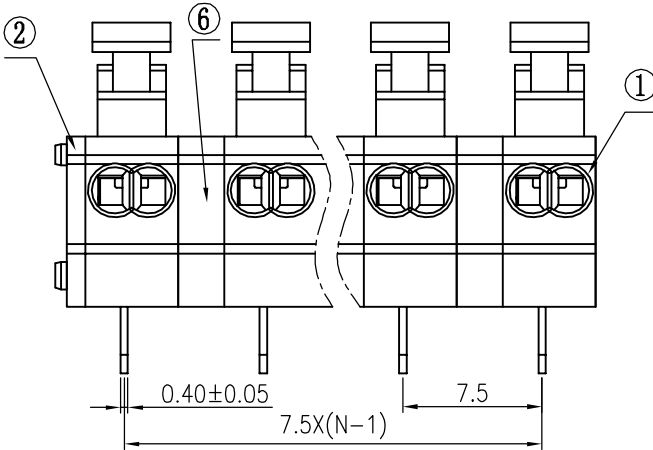
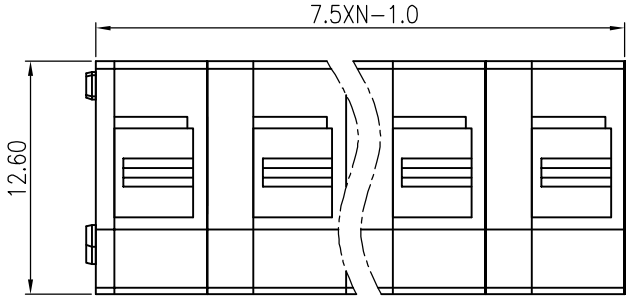
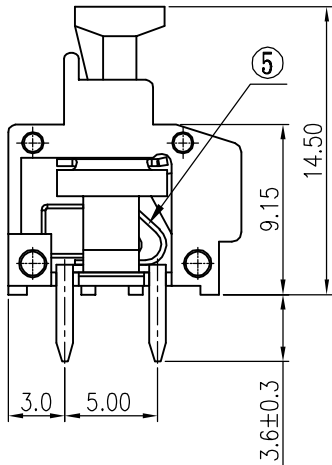


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△1		图面更新	HW	04/11/06	
△2		图面更新	WF	01/31/07	
△3		修改刻字	LJH	11/10/08	

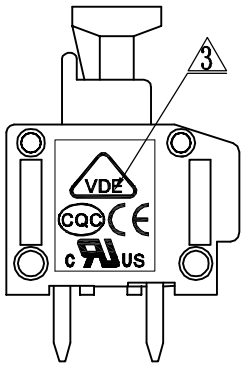

- Notes:
- 1.Pitch:7.5mm ,Poles:2-XXP
 - 2.Rated voltage/current:UL 300V/5A
VDE 250V/10A
 - 3.Operation temperatures:-40℃~+105℃
 - 4.Withstanding Voltage:AC2000V/1Min
 - 5.Insulation Resistance:5000MΩ/DC1000V
 - 6.Wire Range:20~18AWG, 1.5mm²
 - 7.Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm							
	over 6	over 10		over 30	over 60	over 100	over 150			—
to 6	to 10	to 24	to 30	to 60	to 100	to 150				□
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10		

6	DG235-2.5-CalpBoard	3008H0Y01A(H)	XX-1	PA66	UL94V-0
5	DG235T-5.0-Spring	X000000540(H)	XX	Stainless Steel	
4	DG235T-5.0-Pin header	3015B00010(H)	XX	Phosphor Bronze	SnCe plated
3	DG235-5.0 Button	3008D0Y01A(H)	XX	PA66	UL94V-0
2	DG235-5.0 Cover	3008C0Y01A(H)	1	PA66	UL94V-0
1	DG235T-5.0 Housing	3015A0Y01A(H)	XX	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

DFTOHaoyh DATE 09/20/05		宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD			
CHKD DATE					
MFO DATE		NAME			
APPVL DATE		DG235T-7.5-XXP-1Y-00A(H)			
MATERIAL :		DRAWING NO. DG235T-7.5-E02		SIZE	REV
ANGLES ± 1°		/PART NO.		A3	T3
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING		SHEET 1	OF 1
FINISH :		SCALE : 1:1			