
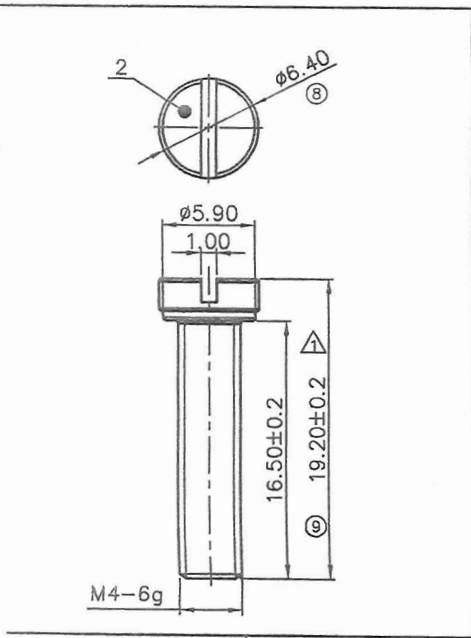

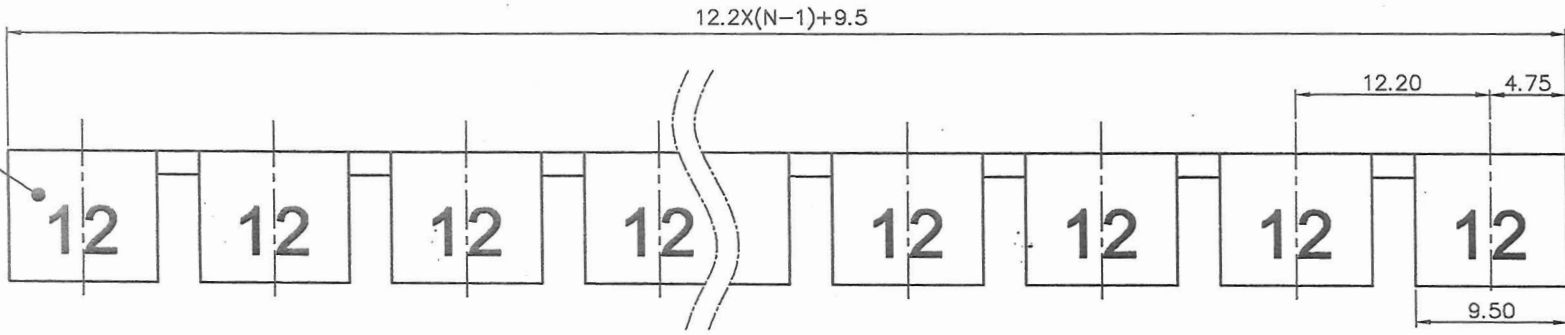


7 6 5 4 3 2 1

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

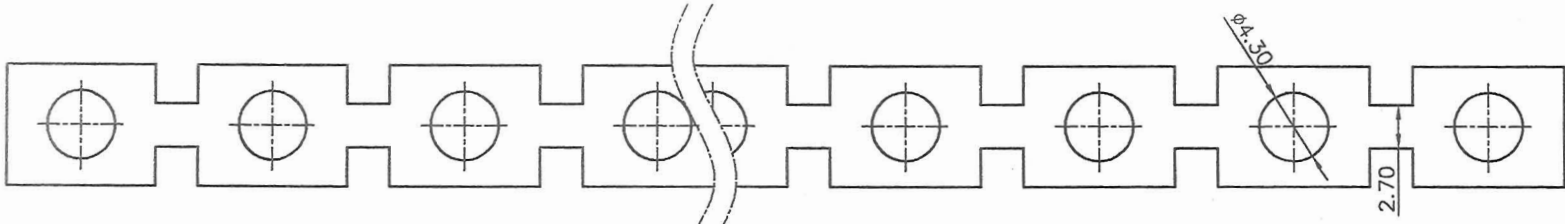

NOTES1:
UL Standard
1.Torque value : M4 , 10.53Lb.in
IEC Standard
1.Torque value : M4 , 1.2N·m

NOTES2:
1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 12.2mm, Poles : N=02~10P
3.Material: T2Y2
4.Plating: Cu plated at the bottom is more than 2um; Sn plated at the bottom is more than 4um
5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm						
Over 6 TO 10	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6.RoHS Compliance

Current carrier and screws should be packed individually, which must be put in the same box

齐发中心
2016.08.25
(仅限内部使用,对外无效)

2	Screw	COPPER ALLOY	Ni plated
1	Current carrier	COPPER ALLOY	Sn plated
ITEM	NAME OF PART	MATERIAL	NOTES

PART NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
APPD: <i>Dan xiaob</i>	NAME: FBIXX-12		
CHKD: <i>ZYK 08/20/16</i>	TITLE: CUSTOMER DRAWING		
DRFT: Ding 08/19/16	DRAWING NO.: FBIXX-12-C01		REV TO
THIRD ANGLE PROJECTION	MM (INCH)	DO NOT SCALE DRAWING	SHEET 1/1
		SCALE	1:1