


文管中心
研发专用
2014.07.21
(仅限内部使用, 对外无效)

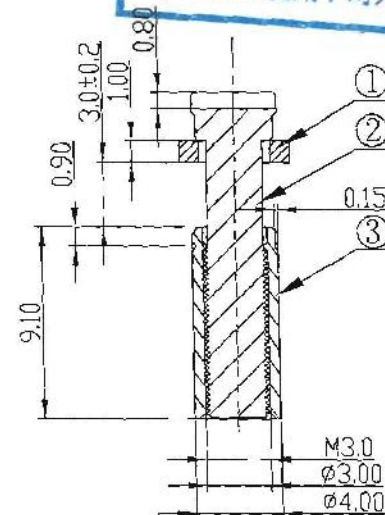

1. Material: Copper;
2. Plating: Cu plated at the bottom is over 1um;
Ni plated on the surface is over 2um;
3. The max burr amount allowed is less than 0.03mm;
4. Screws: M3;
5. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm				Pitch range in mm
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

3	FBRI XX-5 Pillar	X000003950(H)	XX	Brass	Ni
2	FBRI XX-5 Screws	S000004600(H)	XX	Brass	Ni
1	FBRI XX-5 Current carrier	6004BX060(H)	I	Copper	Snce
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

MM
(INCH)

TOLERANCES EXCEPT AS NOTED:

.3 ± .1 *

.50 ± .05 *

.006 ± .01 *

ANGLES ± 1°

THIRD ANGLE PROJECTION SCALE :

DATE 06/08/09

CHKD BY [Signature]

APPROV [Signature] DATE 7/16/09

MFD DATE

MATERIAL

DEGSON ®
NINGBO HENGZHONG ELECTRONICS CO., LTD.

NAME FBRI XX-5

DRAWING NO. FBRI 10-5-E01

PART NO.

SIZE A3

REV C

DO NOT SCALE DRAWING SHEET OF