
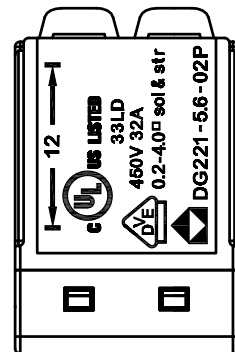

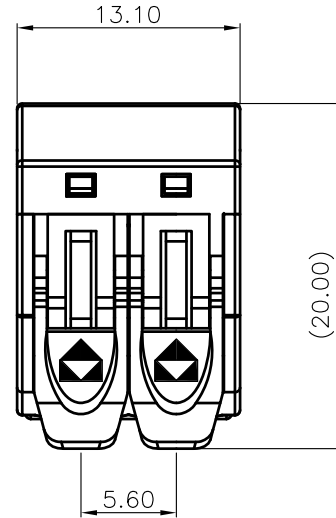


## REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

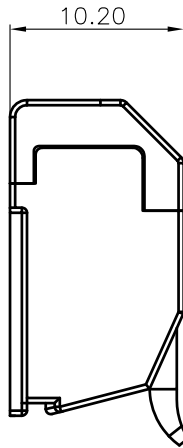

## NOTES1:

UL Standard

1.Rated voltage : 600V

2.Wire range : 24~12AWG

IEC Standard

1.Rated voltage/current : 450V / 32A

2.Wire range : 0.2~4.0mm<sup>2</sup>

## NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009

2.Pitch : 5.6mm, Poles : 02P

3.Stripping length : 12mm

4.Withstanding voltage : AC2500V/1Min

5.Operating temperature: -40°C~+85°C

6.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm				0.1/10
TO	Over	TO	Over	TO	Over	
6	6 TO 10	10	10 TO 24	30	30 TO 60	100 TO 150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
						±1.30
						±2'

7.RoHS Compliance

8.Mark "DG221-5.6-02P": 600V Cu  
24-12AWG sol&str

DG221 - 5.6 - 02P - 1Y - 00A (H)  
(Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey) 2.(Blue) 3.(Black)  
4.(Green) 5.(Orange) 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)

DETACHED LISTS	PART NO.:	/				NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD:	/		NAME:			
	CHKD:	/		DG221-5.6-02P-1Y-00A(H)			
	DRFT:	/		TITLE:	CUSTOMER DRAWING	REV	DO
	THIRD ANGLE PROJECTION		DRAWING NO.:		/	SHEET	1/1
				DO NOT SCALE DRAWING		SCALE	1:1