
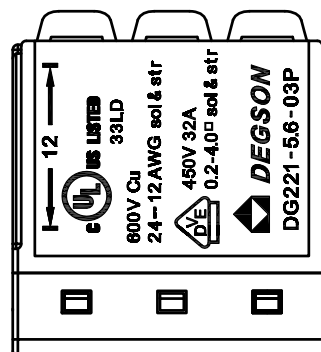

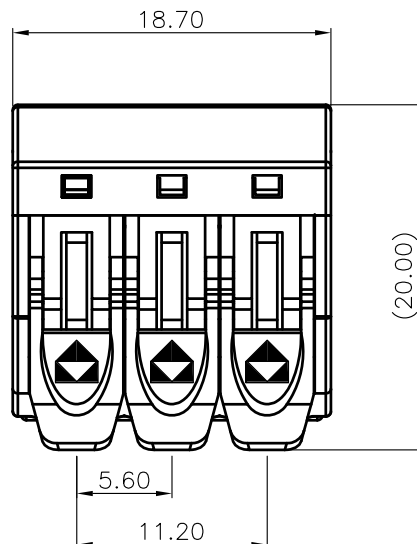


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

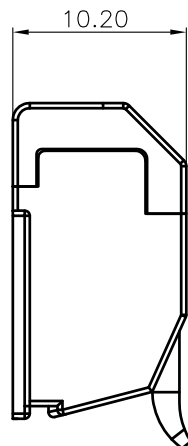

NOTES1:

UL Standard

- 1.Rated voltage : 600V
- 2.Wire range : 24~12AWG

IEC Standard

- 1.Rated voltage/current : 450V / 32A
- 2.Wire range : 0.2~4.0mm²

NOTES2:




- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.6mm, Poles : 03P
- 3.Stripping length : 12mm
- 4.Withstanding voltage : AC2500V/1Min
- 5.Operating temperature: -40°C~+85°C
- 6.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm					
Over 6 TO 10	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
						±2*	

7.RoHS Compliance

DG221 - 5.6 - 03P - 1Y - 00A (H)
(Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey) 2.(Blue) 3.(Black) 4.(Green) 5.(Orange) 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)

(RoHS)
00A-(Standard)

DETACHED LISTS	PART NO.:	/	 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD				
	APPD:	/	NAME: DG221-5.6-03P-1Y-00A(H)				
	CHKD:	/					
	DRFT:	/	TITLE: CUSTOMER DRAWING		REV	DO	
	 THIRD ANGLE PROJECTION		DRAWING NO.: /		SHEET 1/1		
			 MM (INCH)	DO NOT SCALE DRAWING		SCALE 1:1	