

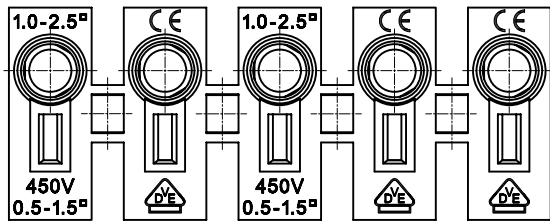




(2XX+1)P 时  
最后两线刻字相同

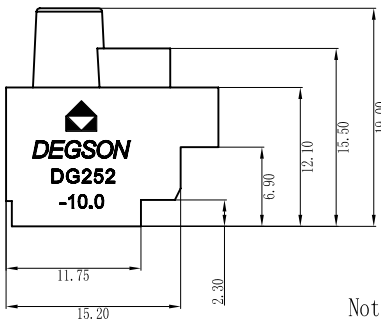

(2XX)P 时  
最后两线刻字不同

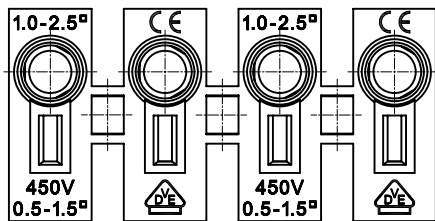


Section A-A

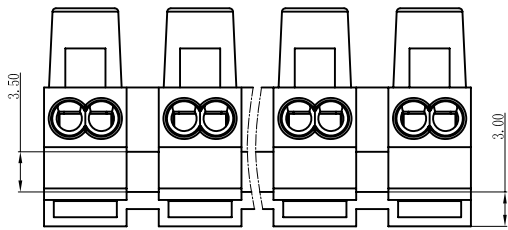

- Notes:
- 1.Pitch:10.0mm, Poles:2-12P
  - 2.Rated voltage/current:UL1059 300V/10A  
VDE 450V/17.5A
  - 3.Operation temperatures:-40℃~+105℃
  - 4.Withstanding Voltage:AC2000V/1min
  5. Insulation Resistance:5000MΩ/DC1000V
  - 6.Wire Range:Screwless 0.5~1.5mm<sup>2</sup> 22~16AWG  
Screw 1.0~2.5mm<sup>2</sup>
  - 7.Max. Torque Value:M3.5, 4.08kgf.cm
  - 8.Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

3	DG252-Cage	X000001070 (H)	XX	Steel	Cr <sup>3+</sup> Zn	
2	DG252-Screw M3.5	S000000890 (H)	XX	Steel	Cr <sup>3+</sup> Zn	
1	DG252 Housing	2004A0YXXA (H)	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES	
DETACHED LISTS	← MM (INCH) →		DFTO L1UM	DATE 03/29/06"		
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
			MFO	DATE		
			APPVL	DATE		
			MATERIAL :			
	ANGLES ± 1°		G.E :			
	THIRD ANGLE PROJECTION		FINISH :			
			SCALE : 1:1			
<div><div></div><div>宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div></div>						
NAME <div>①</div> DG252-XXP-1Y-00A (H)						
DRAWING NO. DG252-E01				SIZE A3	REV T4 08/27/09"	
/PART NO.						
DO NOT SCALE DRAWING				SHEET 1	OF 1	