
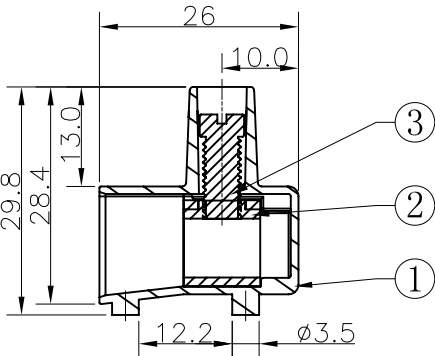
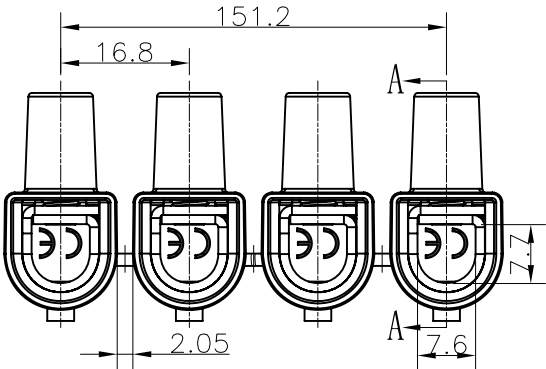
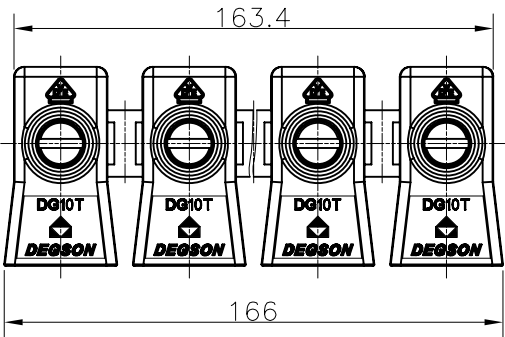


REVISION RECORD					
REV	ECN	DESCRIPTION	DRFT	DATE	

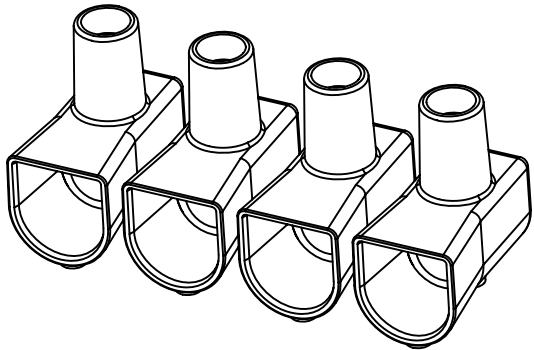


Section A-A





Notes:

1. Pitch:16.8, Ploes:10P
2. Rated voltage/Current:VDE 750V 57A
3. Operation temperatures:-40℃~+85℃
4. Withstanding Voltage:AC3000V/1Min
5. Insulation Resistance:5000MΩ /DC1000V
6. Wire Range:2x(2.5-10)mm²
7. Max. Torque Value:M5.0, 20.4Kgf.cm(17.54Lb.in).

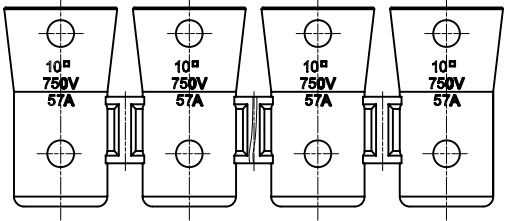

3	DG10T"-Screw	S000003430 (H)	10	Steel	Cr ³⁺ Zn
2	DG10T-Current carrier	X000004450 (H)	10	Steel	Cr ³⁺ Zn

1	DG10T-Housing	2044A0710A (H)	1	PC	UL94V-2
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DETACHED LISTS	<div>← MM (INCH) →</div>	DFTO Apple	DATE 10/10/09*	<div> 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div> <div>NAME DG10T-10P-17-100A (H)</div>	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM	MFO	DATE		
	0-30 ±0.25	APPVL	DATE		
	30-60 ±0.3 ±	MATERIAL :			
	60-100 ±0.5 ±				
	100-150 ±0.7 ±	G.E :			
	over150 ±1.0 ±				
	ANGLES ± 1°	FINISH :			
					
THIRD ANGLE PROJECTION	SCALE : 1:1				
DRAWING NO. DG10T-E02			SIZE A4	REV TO 03/22/10*	
/PART NO.					
DO NOT SCALE DRAWING				SHEET 1	OF 1