


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
②		图面更新	HW	05/07/06
③		图面更新	WF	01/31/07
④		增加CQC刻字	WLM	01/15/09
⑤	10-0359	增加VDE刻字及修改参数	ZXX	10/21/10

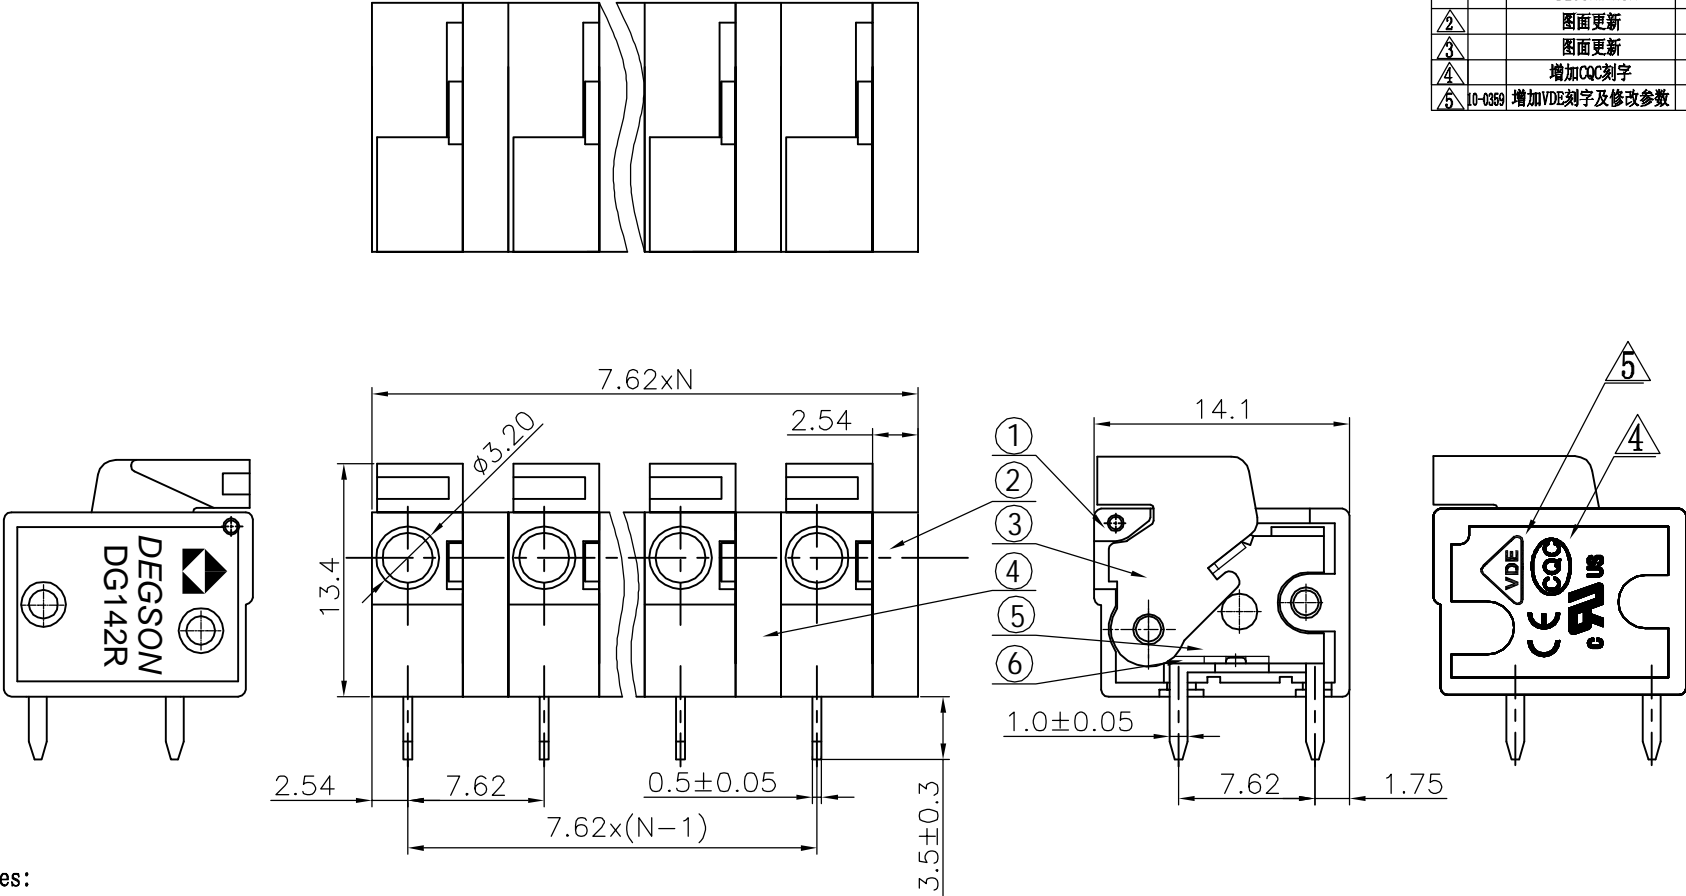


Notes:

1. Pitch:7.62mm , Poles:XXP
2. Rated voltage/current:UL 300V/10A
VDE 450V/15A
3. Operation temperatures:-40℃~+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ/DC1000V
6. Wire Range:22~16AWG, 0.2~1.5mm²
7. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1	0.05/10

6	DG142 Spring	X000000130 (H)	XX	Stainless Steel	
5	DG142R Pin header	3005B00010 (H)	XX	Brass	SnCe plated
4	DG142 Clapboard	3003H0Y01A (H)	XX-1	PA66	UL94V-0
3	DG142 Button	3003D0501A (H)	XX	PA66	UL94V-0
2	DG142 Cover	3003C0Y01A (H)	1	PA66	UL94V-0

1	DG142R-5.08 Housing	3005A0Y01A (H)	XX	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES	
DETAILED LISTS	<div>← MM (INCH) →</div>	DFTO Home	DATE 02/15/06	<div> 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div>		
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE			
		MFO	DATE			
		APPVL	DATE			
	<div>MM .0 ± ± .00 ± ± .000 ± ±</div>			NAME DG142R-7.62-XXP-1Y-00A(H)		
	MATERIAL :					
	ANGLES ± 1°	G.E :		DRAWING NO. DG142R-7.62-E02 /PART NO.		
	FINISH :		SIZE A3			REV T5 10/21/00
	THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING			
SCALE : 1:1		SHEET 1 OF 1				