
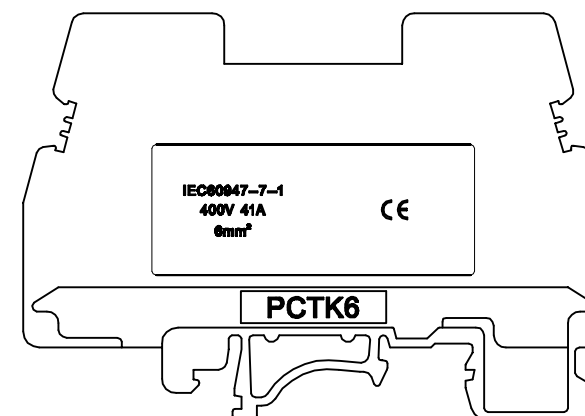


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		图面整理	Apple	04/07/08*	

Notes:

- Rated voltage/current:UL1059 300V/50A  
IEC 450V/41A
- Operation temperatures:-40℃~+105℃
- Withstanding Voltage:AC3000V/1Min
- Insulation Resistance:5000MΩ /DC1000V
- Wire Range:26~10AWG, 6mm<sup>2</sup>
- Max. Torque Value:M4. 0, 12. 24Kgf. cm
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					—
to	over	to	over	to	over	to	□
6	6 to 10	10 to 24	30 to 60	60 to 100	100 to 150	150	□
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1
							0.05/10

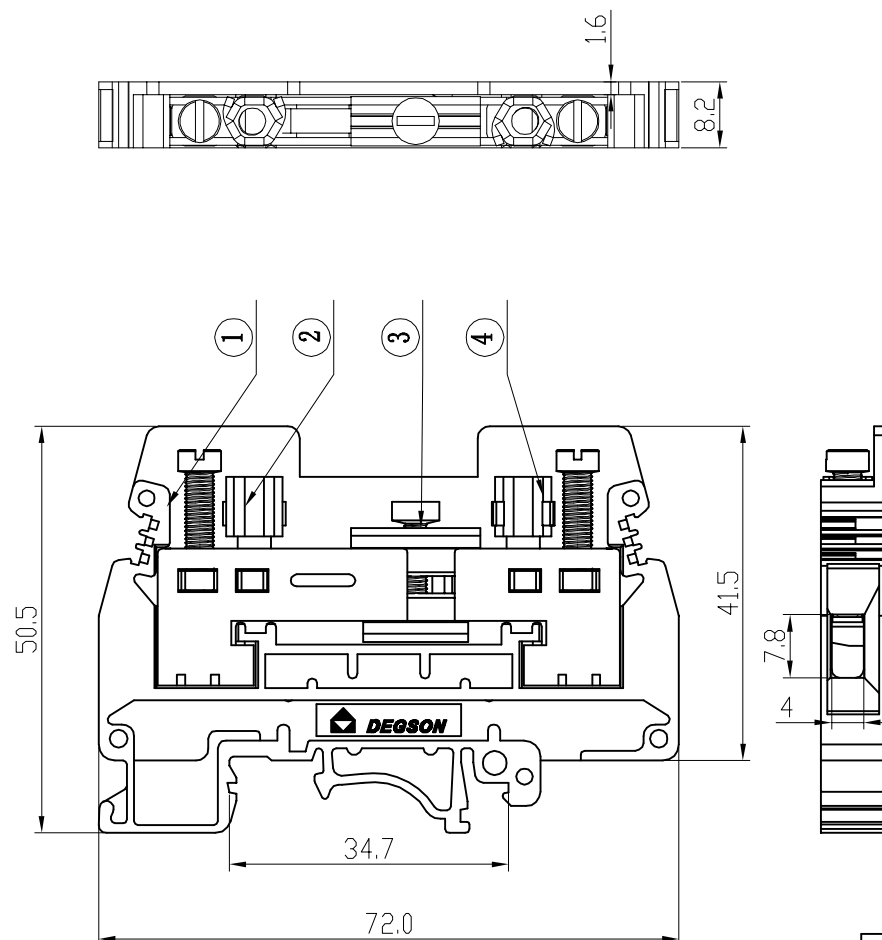

2	PCTK6-Right Hardware	6127B00030 (H)	1	Brass	Ni Plated
2	PCTK6-Contact Hardware	6127B00020 (H)	1	Brass	Ni Plated
2	PCTK6-Left Hardware	6127B00010 (H)	1	Brass	Ni Plated

1	PCTK6-Housing	6127A0Y01A (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DFTD Apple	DATE 02/27/08*	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME PCTK6-01P-1Y-00A (H) DRAWING NO. PCTK6-E01 /PART NO. DO NOT SCALE DRAWING SHEET 1 OF 1	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM	MFD	DATE		
	.0 ±	APPVL	DATE		
	.000 ±	MATERIAL			
ANGLES ± 1°		G.E		SIZE A3	
THIRD ANGLE PROJECTION		FINISH:		REV T1	
		SCALE : 1:1		04/07/08*	