
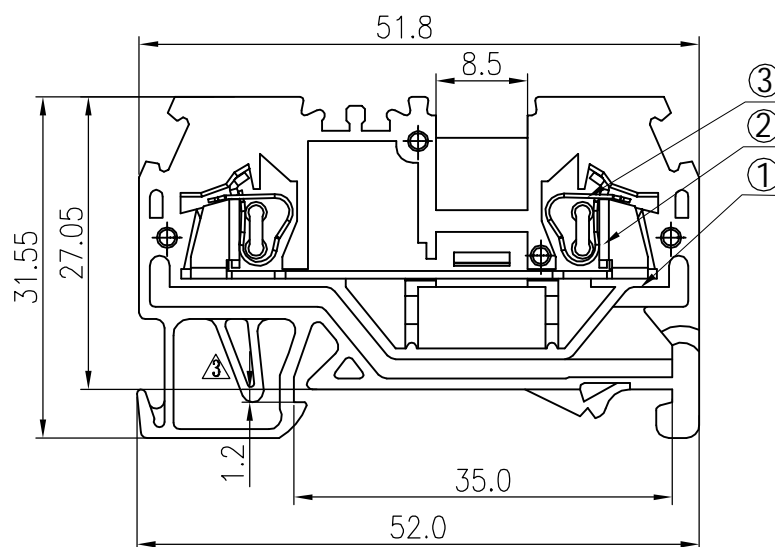
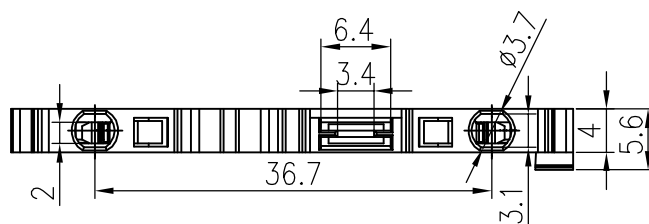


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		品名、料号增加环保标示“(H)”	LJH	12/10/07	
△		增加UL刻字及参数	Zengy	09/06/08	
△		增加限位结构	CW	05/18/08	

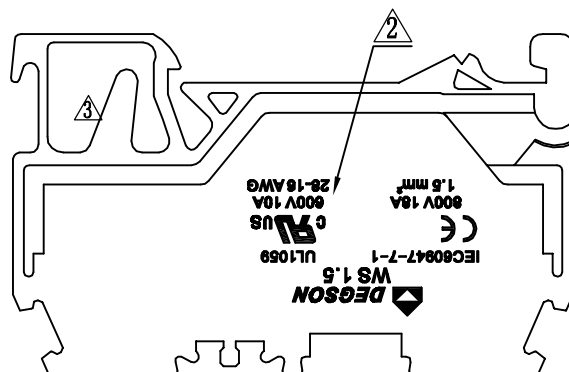

3	WS 1.5-Shrapnel	X000001700(H)	2	Stainless Steel	
2	WS 1.5-Current Carrier	6026B00010(H)	1	Copper	SnCe plated

Notes:

- Rated voltage/current:UL 600V/10A
IEC 800V/18A
- Operation temperatures:-40℃~+105℃
- Withstanding Voltage:AC3000V/1Min
- Insulation Resistance:5000MΩ /DC1000V
- Wire Range:28~16AWG, 1.5mm²
- Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
	over 6	over 10		over 30	over 60	over 100	over 150	⌒
to 6	to 10	to 24	to 30	to 60	to 100	to 150		▱
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

1	WS 1.5-Housing	6026A0Y01A(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DFTO Yangys	DATE 06/01/07	宁波高正电子有限公司 DEGSN ELECTRONICS CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
		MFO	DATE		
	MM	APPVL	DATE	NAME	
	.0 ±			WS 1.5-01P-1Y-00A(H)	
	.00 ±			DRAWING NO. WS 1.5-E01	
	.000 ±			/PART NO.	
	ANGLES ± 1°	G.E :		SIZE A3	
	THIRD ANGLE PROJECTION	FINISH :		REV T3	
		SCALE :		05/18/08	
DO NOT SCALE DRAWING				SHEET 1	OF 1