
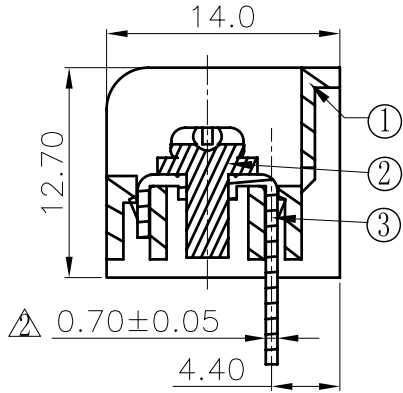



REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△1		产品名称由DG16A变更为DG16S	WF	01/14/06*	
△2		尺寸变更	WF	07/09/06*	
△3		增加UL刻字	CSX	04/25/07*	
△4		增加UL参数	Zengy	09/03/08*	

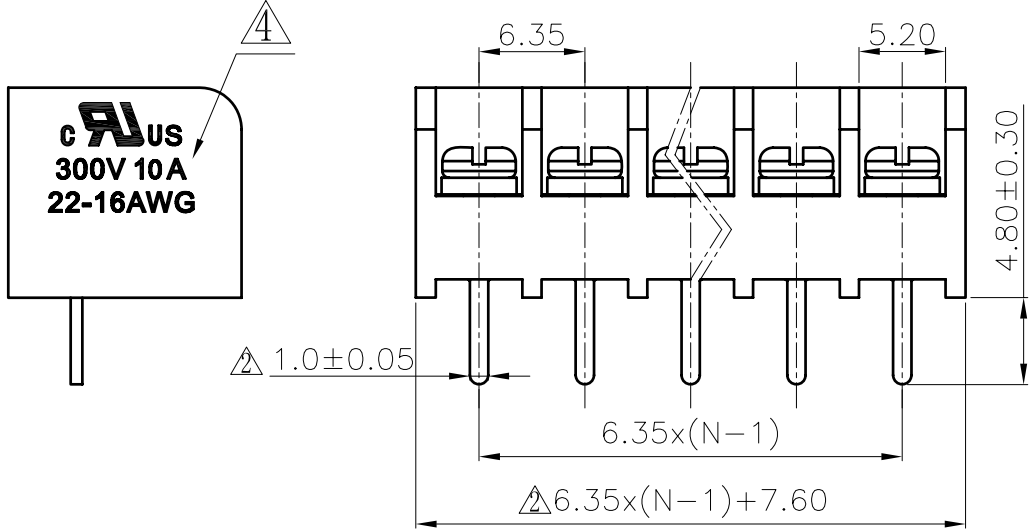


SECTION A-A

- NOTE:
- 1. Pitch: 6.35mm , Poles: 2P-24P;
 - 2. Rated voltage/current: UL 300V/10A; IEC 250V/17.5A;
 - 3. Temp. Range: -40℃~+105℃;
 - 4. Withstand Voltage: AC2000V/1min;
 - 5. Insulation Resistance: 500MΩ/DC500V;
 - 6. Wire Range: 22-16AWG; 1.5mm²
 - 7. Max. Torque Value: M2.5 , 4.08Kgf.cm
 - 8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0
							0.005/0

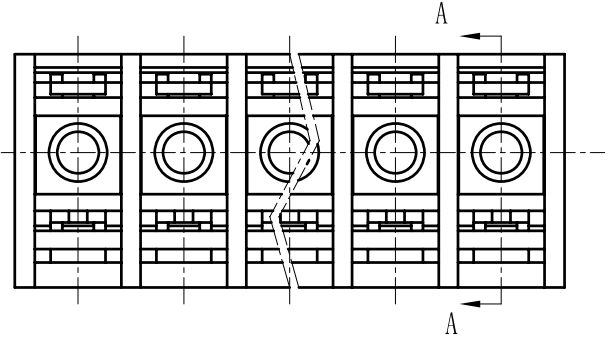

3	DG16S Pin header	5010B00010(H)	XX	Brass	SnCe
2	2.5*6 (4*6) "十一"bright Screws	S000000700(H)	XX	Steel	Ni plated

1	DG16S-B housing	5010A0YXXA(H)	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES	
DETACHED LISTS	<div>← MM (INCH) →</div>		DFTO Home	DATE 12/28/05*		
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
			MFO	DATE		
			APPVL	DATE		
			NAME			
			DG16S-B-XXP-1Y-00A(H)			
			DRAWING NO. DG16S-E08			
			/PART NO.			
			SIZE A3			
		REV T4				
		09/03/06				
ANGLES ± 1°		G.E :				
		FINISH :				
THIRD ANGLE PROJECTION		SCALE : 1:1		DO NOT SCALE DRAWING		
		SHEET 1		OF 1		