


KJN SFTY X1-440 Y1-250, Ceramic, 2200 pF, 20%, 440 VAC (X1), 250 VAC (Y1), Y5U, Lead Spacing = 10mm

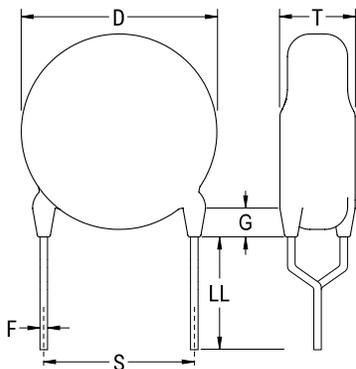

**Dimensions**

<b>D</b>	12mm MAX
<b>T</b>	6.5mm MAX
<b>S</b>	10mm MAX
<b>F</b>	0.6mm +/-0.1mm

**Packaging Specifications**

<b>Packaging:</b>	T&R, 360mm, H0 = 16mm, Component Pitch = 25.4mm
<b>Packaging Quantity:</b>	500

**General Information**

<b>Series:</b>	KJN SFTY X1-440 Y1-250
<b>Style:</b>	Radial Disc
<b>RoHS:</b>	Yes
<b>Termination:</b>	Tin
<b>Failure Rate:</b>	N/A
<b>Qualifications:</b>	ENEC, cUL, CQC, VDE
<b>AEC-Q200:</b>	No

**Specifications**

<b>Capacitance:</b>	2200 pF
<b>Capacitance Tolerance:</b>	20%
<b>Voltage AC:</b>	440 VAC (X1), 250 VAC (Y1)
<b>Dielectric Withstanding Voltage:</b>	4000 VDC
<b>Temperature Range:</b>	-25/+85°C
<b>Temperature Coefficient:</b>	Y5U
<b>Insulation Resistance:</b>	10 GOhms
<b>Safety Class:</b>	X1/Y1