


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△1		图面整理	Hang	02/08/06
△2		增加UL刻字	csx	06/08/06
△3		修改脚宽	csx	09/20/06
△4		品名、料号增加环保标识“00”	Ye j	12/08/07
△5		工程变更，商标品名改到侧面	LJH	09/03/08

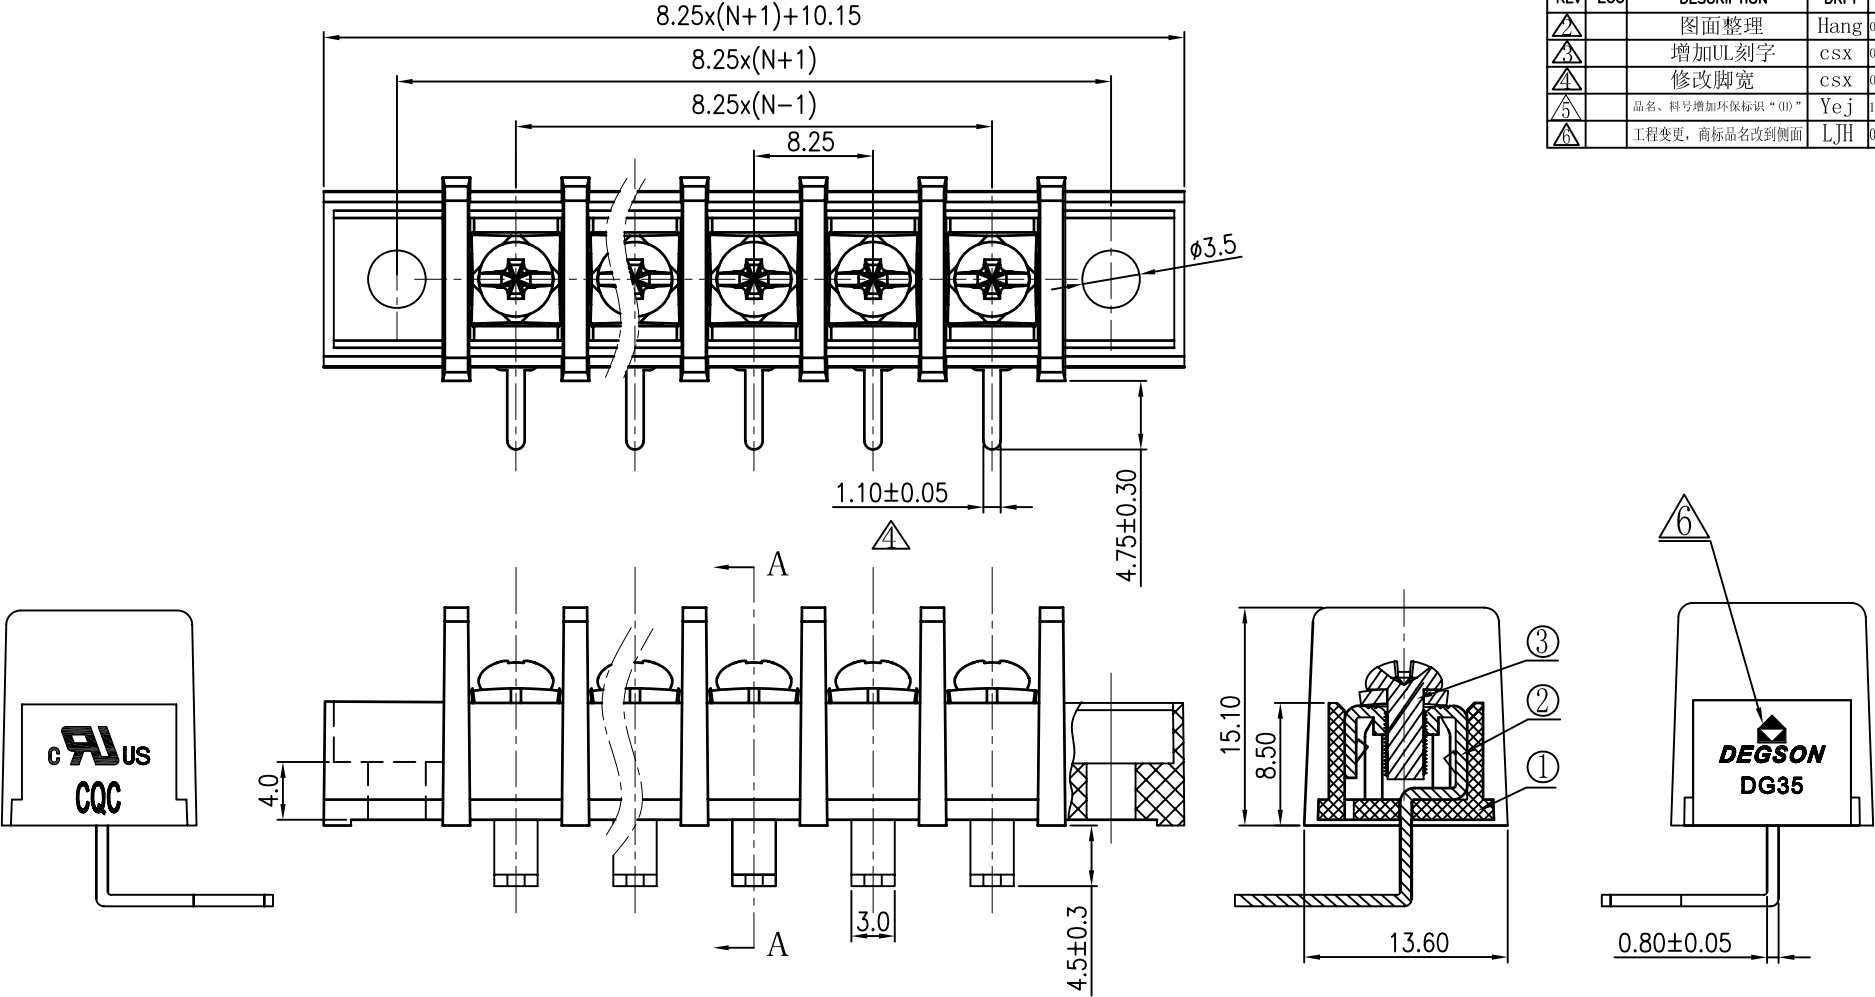

Notes:

1. Pitch: 8.25mm , Poles: 2P-24P
2. Rated voltage/current: UL 300V/20A
IEC 450V/32A
3. Operation temperature: -40° C ~+105° C
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 500MΩ/DC500V
6. Wire Range: 22~12AWG; 4mm²
7. Max. Torque Value: M3, 5.10Kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
to	over	to	over	to	over	to	over	to	
6	10	10	30	30	60	60	100	150	⌒
10	24	30	60	100	150				▯
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

SECTION A-A

3	3*6 bright-Screw	S000000450 (H)	XX	Steel	Ni Plated		
2	DG25R-Pin Header(A)	5001B00060 (H)	XX	Brass	SnCe		
1	DG35-Housing	5002M0YXXA (H)	1	PA66	UL94V-0		
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES		
DETACHED LISTS	<div>← MM (INCH) →</div>		DFTO Zhuwm	DATE 03/03/04"			
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE			
			MFO	DATE			
			APPVL	DATE			
	MM		<div><div><div><div></div></div><div>DEGSON®</div><div>DEGSON ELECTRONICS CO., LTD</div></div><div>NAME</div><div>DG35R-A-XXP-1Y-00A(H)</div><div>DRAWING NO. DG35R-E03</div><div>SIZE A3</div><div>REV T6</div><div>09/03/08</div></div>				
	.0 ±						±
	.00 ±						±
	.000 ±						±
	ANGLES ± 1'		G.E :				
	<div><div><div></div></div><div>THIRD ANGLE PROJECTION</div></div>		FINISH :				
		SCALE : 1:1		DO NOT SCALE DRAWING			
				SHEET 1	OF 1		