
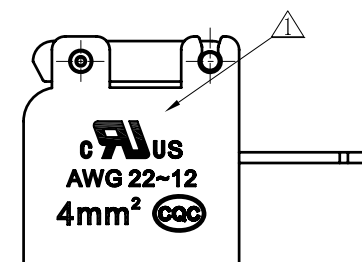
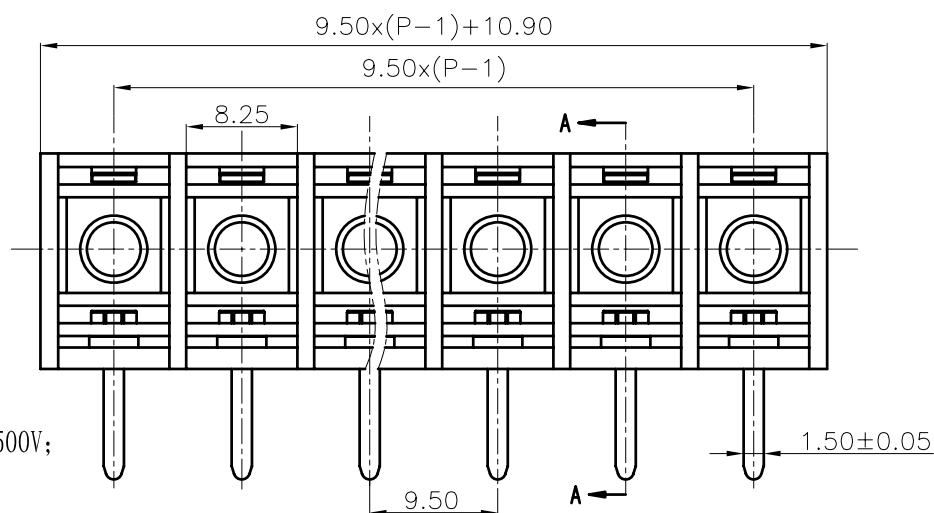



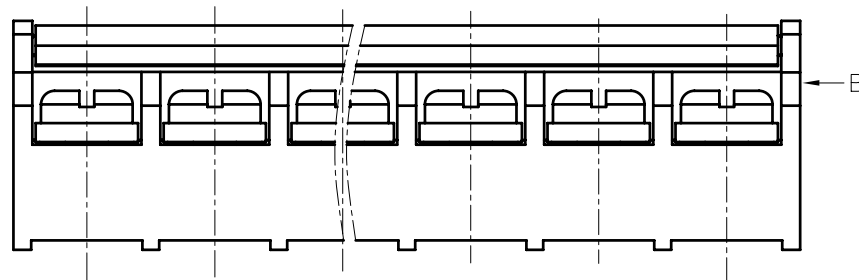

H

Section B


1. Pitch: 9.5mm;
2. Rated: 300V/20A;
3. Temp. Range:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$ ;
4. Withstand Voltage: AC2000V/1min;
5. Wire Range: 22-12AWG;
6. Insulation Resistance:  $500\text{M}\Omega$  /DC500V;
7. Max. Torque Value: 12.24Kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range					—
	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	 
to 6								
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	DG46G-B-Cover	5013C07XXA (H)	1	PC	
3	DG46GR Pin header	5013B00050 (H)	XX	Brass	SnCe
2	M4*8 (7.5*7.5) Bright screws	S000000570 (H)	XX	Steel	Ni plated

B

DETACHED LISTS



THIRD ANGLE PROJECTION

A