





REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
①		增加尺寸由5.40±0.10变更到5.30±0.30	CSX	06/17/05	
②		增加UL刻字	CSX	07/04/06	
③		品名、料号增加环保标识“(H)”	Yej	12/08/07	

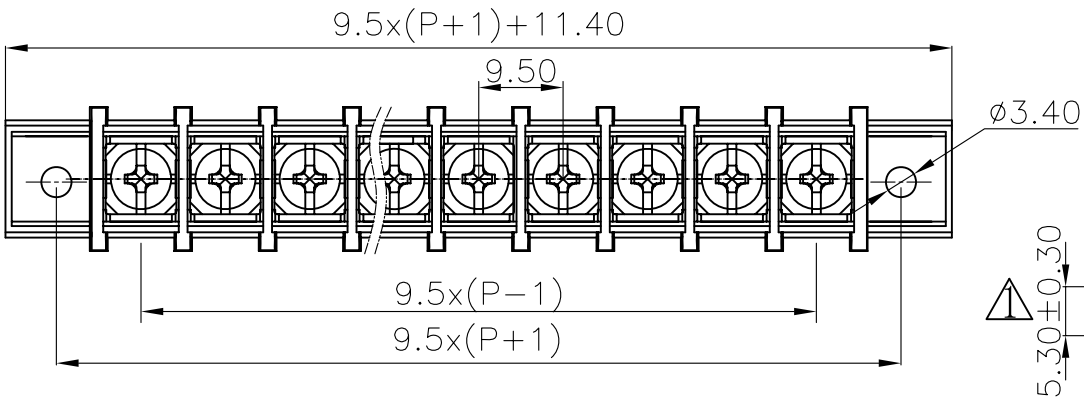


Section A-A

- Notes:
- 1. Pitch: 9.5mm Poles: 2-24P
  - 2. Rated current: 25A
  - 3. Rated voltage: 300V
  - 4. Operation temperatures: -40° C ~ +105° C
  - 5. Insulation Withstand Voltage: AC2000V/1Min
  - 6. Insulation Resistance: 500MΩ/DC500V
  - 7. Wire Range: 22~12AWG
  - 8. Max. Torque Value: 12.24kgf.cm
  - 9. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	to	over	
6	10	6	10	30	60	100	150	∩
to 6	to 10	to 6	to 10	to 30	to 60	to 100	to 150	∇
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	asmo

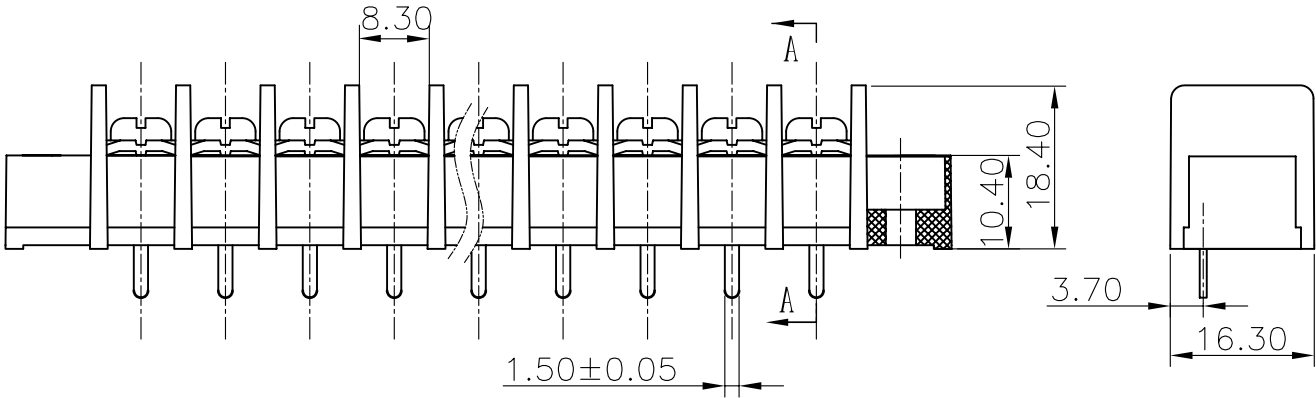

3	DG45S Pin header	5003B00080 (H)	XX	Brass	SnCe
2	4*8 Bright Screws	S000000570 (H)	XX	Steel	Ni plated

1	DG45S-A-00A Housing	5003MOYXXA (H)	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES	
DETACHED LISTS	<div>← MM (INCH) →</div>		DFTO JANNY	DATE 11/03/03"		
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
			MFO	DATE		
			APPVL	DATE		
			MATERIAL :			
			NAME			
			DG45S-A-XXP-1Y-00A(H)			
ANGLES ± 1°		G.E :		DRAWING NO. DG45S-E03		
		FINISH :		/PART NO.		
THIRD ANGLE PROJECTION		SCALE : 1:1		DO NOT SCALE DRAWING		
				SHEET 1	OF 1	
DEGSON 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD						
SIZE A3 REV T3 12/08/07						