


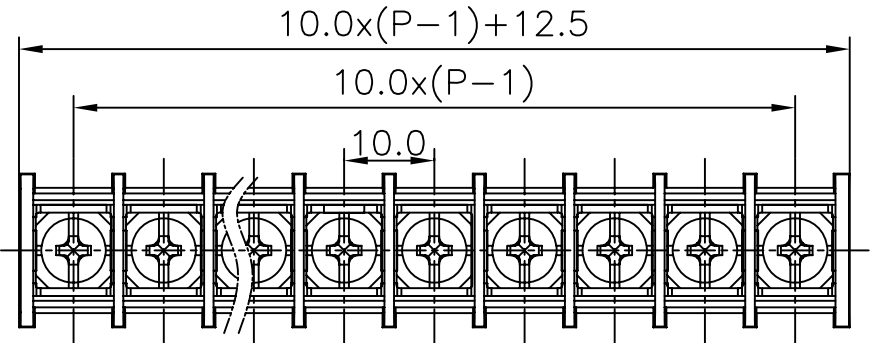
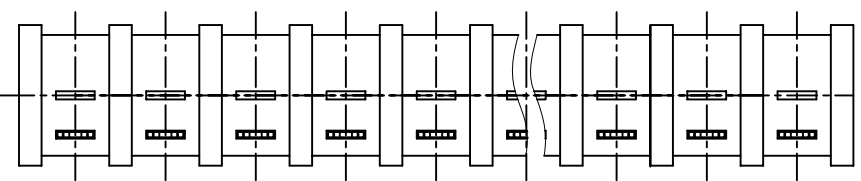


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
2		图面更新	HW	06/12/06	
3		增加UL刻字	YeJ	01/29/07	
4		品名、料号增加环保标识“(H)”	YeJ	12/08/07	

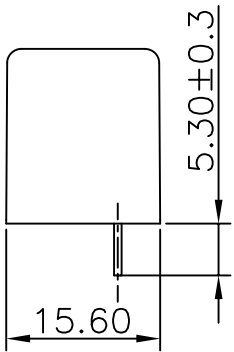


Section A-A

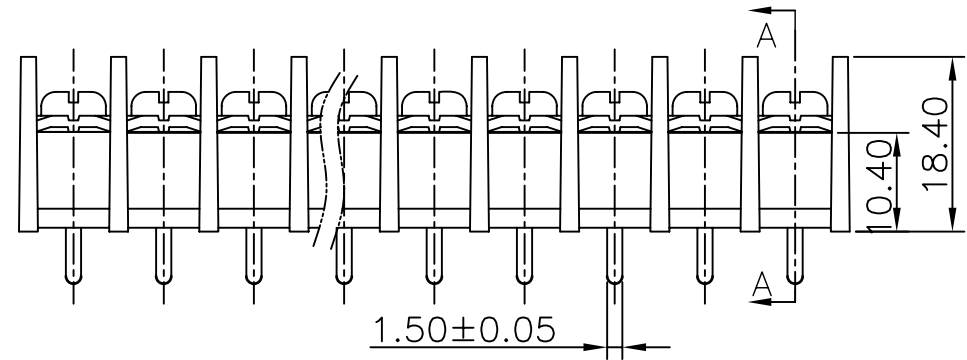

- Notes:
1. Pitch:10.0mm Pole:2-26P
  2. Rated current:20A
  3. Rated voltage:300V
  4. Operation temperatures:-40℃~+105℃
  5. Withstanding Voltage:AC2000V/1Min
  6. Insulation Resistance:500MΩ/DC500V
  7. Wire Range:22~12AWG
  8. Max.Torque Value: 12.24kgf.cm.
  9. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm		
to	over	to	over	
6	6	10	10	10
10	10	24	24	24
24	24	30	30	30
30	30	60	60	60
60	60	100	100	100
100	100	150	150	150
150	150	150	150	150
150	150	150	150	150
150	150	150	150	150



3	4*8 bright Screws	S000000570 (H)	XX	Steel	Ni plated
2	DG45S Pin header	5003B00080 (H)	XX	Brass	SnCe Plated

1	DG55-B housing	5004A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DEGSON 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD					
NAME DG55S-B-XXP-1Y-00A(H)					
DRAWING NO. DG55S-E01				SIZE A3	REV T4
/PART NO.				12/08/07	
SCALE : 1:1				DO NOT SCALE DRAWING	
SHEET 1				OF 1	