
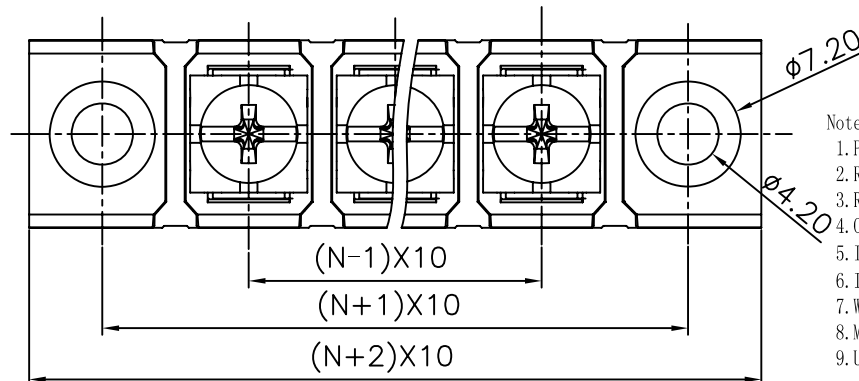





REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
①		增加UL刻字	CSX	03/13/07
②		品名、料号增加环保标识“(H)”	YeJ	12/08/07






Notes:

1. Pitch:10mm , Poles:2-20P
2. Rated current:20A
3. Rated voltage:300V
4. Operation temperatures:-40° C~+105° C
5. Insulation Withstand Voltage:AC2000V/Min
6. Insulation Resistance:500M $\Omega$ /DC500V
7. Wire Range:22~14AWG
8. Max. Torque Value:12. 24kgf. cm
9. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm				
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

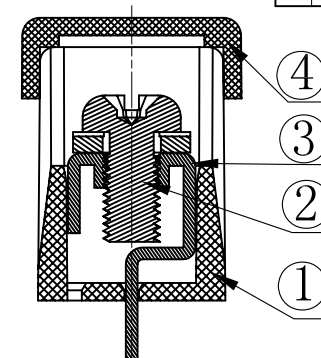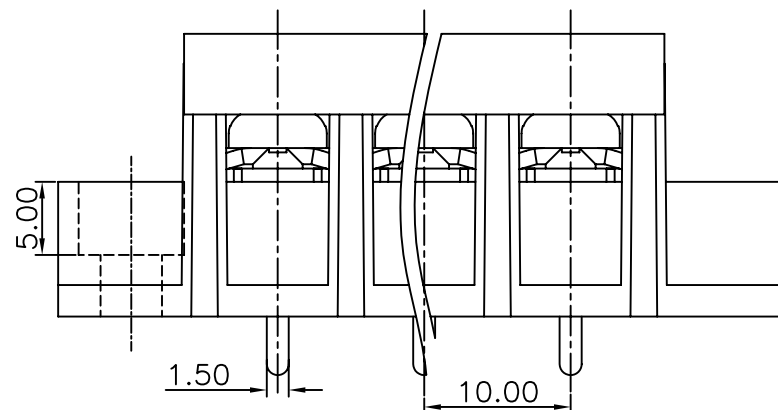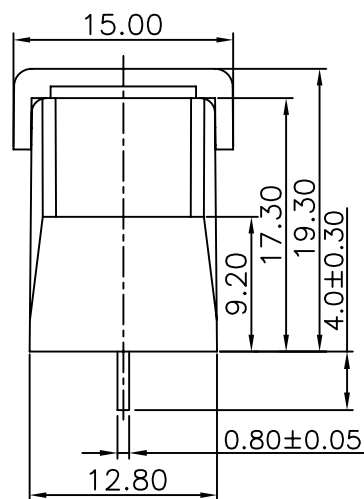

SECTION A-A

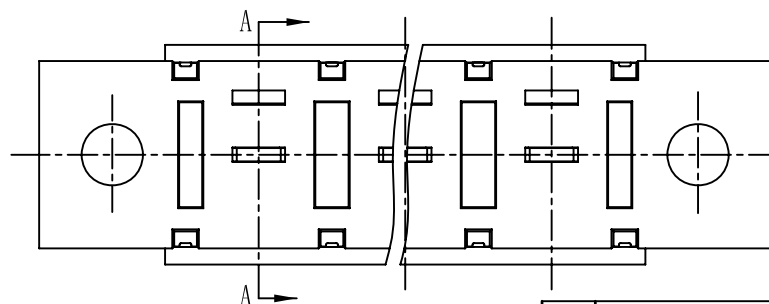

4	DG58-Cover	5008C07XXA (H)	1	PC	
3	DG58C Pin header	5008B00010 (H)	XX	Brass	SnCe plated
2	M4*8 (7.5*7.5) bright Screws	S000000570 (H)	XX	Steel	Ni plated

1	DG58-A Housing		5008MOYXXA(H)		1	PA66+23%GF	UL94V-0
ITEM	NAME OF PART		NO. OF PART		Q"TY	MATERIAL	NOTES
DETACHED LISTS			DFTO Zhuwm		DATE 01/13/06"		
	TOLERANCES EXCEPT AS NOTED		CHKD		DATE		
	MFO		DATE		宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		
	APPLY		DATE				
	MM .0 ±                      ± .00 ±                     ± .000 ±                    ±		MATERIAL :		NAME DG58C-A-XXP-1Y-00A(H)		
	ANGLES ± 1°		G.E :		DRAWING NO. DG58C-E01		
			FINISH :		/PART NO.		
	THIRD ANGLE PROJECTION		SCALE : 1:1		DO NOT SCALE DRAWING		
					SHEET 1 OF 1		
				SIZE A3			REV T2 12/08/07