
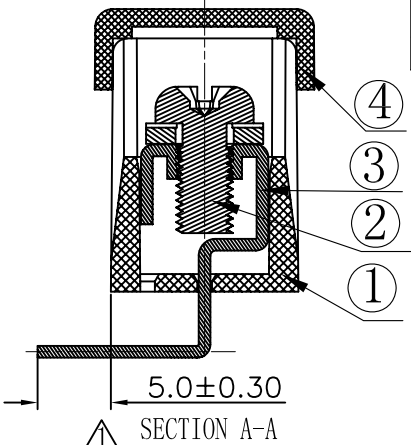
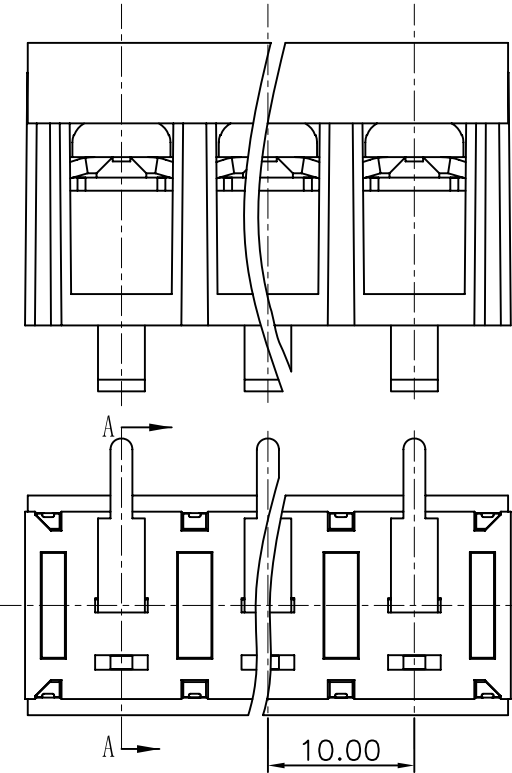
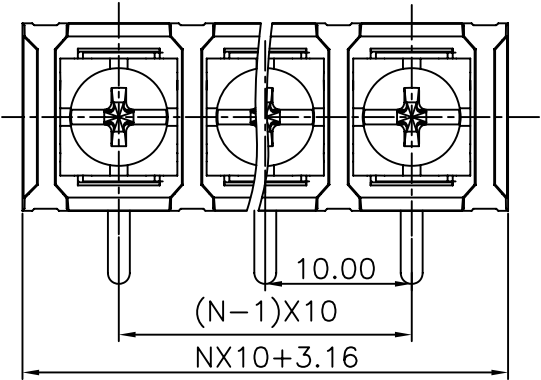

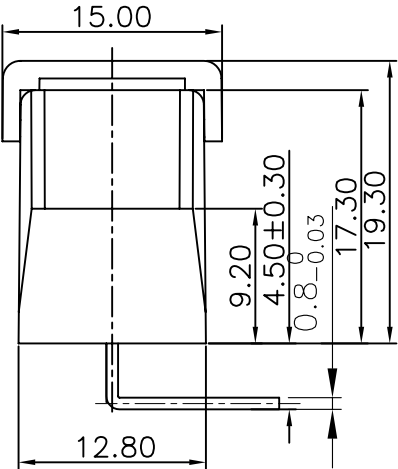




REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		图面更新	CSX	03/13/07	

- Notes:
- 1. Pitch:10mm , Poles:2-22P
 - 2. Rated current:20A
 - 3. Rated voltage:300V
 - 4. Operation temperatures:-40° C~+105° C
 - 5. Insulation Withstand Voltage:AC2000V/Min
 - 6. Insulation Resistance:500MΩ /DC500V
 - 7. Wire Range:22~14AWG
 - 8. Max. Torque Value:12.24kgf. cm
 - 9. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 6	over 6 to 30	over 30 to 90	over 90 to 200	over 200 to 480	—
±0.10	±0.15	±0.25	±0.1	±0.2	±0.3	±0.5	±0.7	0.05/0



4	DG58-Cover	5008C07XXA(H)	1	PC	
3	DG58C Pin header	5008B00060(H)	XX	Brass	SnCe plated
2	M4*8(7.5*7.5)bright Screws	S000000570(H)	XX	Steel	Ni plated

1	DG58-B-Housing	5008A0YXXA(H)	1	PA66+23%GF	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DETACHED LISTS	<div>← MM (INCH) →</div>		DFTO Zhuwm DATE 01/13/06"		
	TOLERANCES EXCEPT AS NOTED		CHKD DATE		
			MFO DATE		
			APPVL DATE		
			MATERIAL :		
	MM .0 ± .00 ± .000 ±		± ± ±		
	ANGLES ± 1°		G.E :		
	<div></div>		FINISH :		
THIRD ANGLE PROJECTION		SCALE : 1:1			
<div><div> 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div><div>NAME DG58R-B-XXP-1Y-00A(H)</div></div>					
DRAWING NO. DG58R-E03				SIZE	REV
/PART NO.				A3	T1
DO NOT SCALE DRAWING				SHEET 1	OF 1
				03/13/07	