
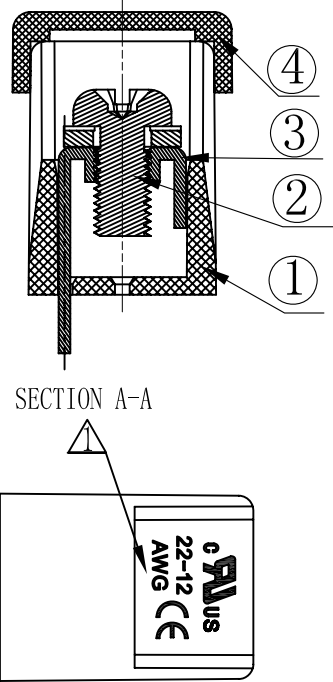


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		增加UL刻字	CSX	03/13/07
2		品名、料号增加环保标识“(H)”	YeJ	12/08/07

- Notes:
- 1. Pitch:10mm , Poles:2-22P
 - 2. Rated current:20A
 - 3. Rated voltage:300V
 - 4. Operation temperatures:-40° C~+105° C
 - 5. Insulation Withstand Voltage:AC2000V/Min
 - 6. Insulation Resistance:500MΩ /DC500V
 - 7. Wire Range:22~14AWG
 - 8. Max. Torque Value:12. 24kgf. cm
 - 9. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					
	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0
							0.05/10

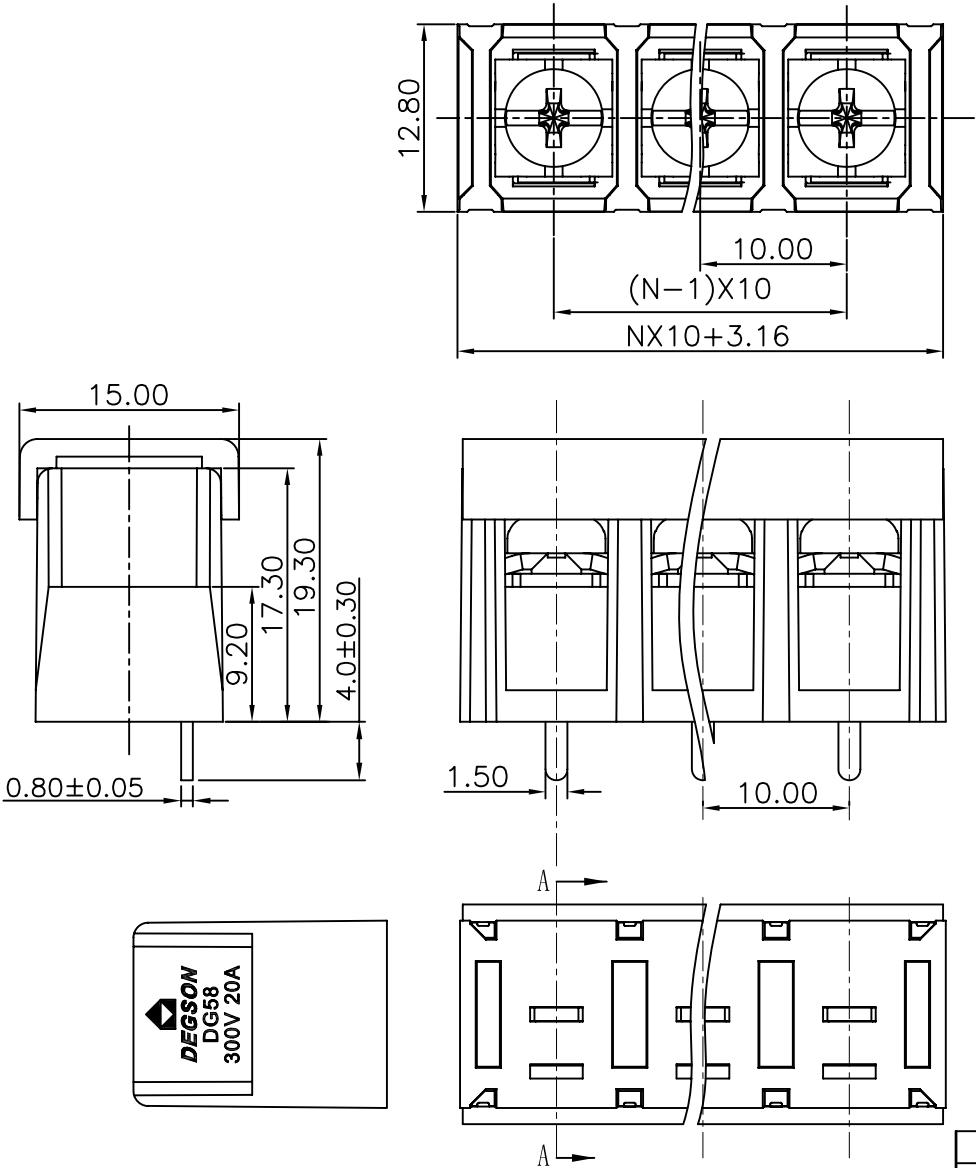

4	DG58-Cover	5008C07XXA(H)	1	PC	
3	DG58S Pin header	5008B00030(H)	XX	Brass	SnCe plated
2	M4*8(7.5*7.5)bright Screws	S000000570(H)	XX	Steel	Ni plated

1	DG58-B-Housing	5008A0YXXA(H)	1	PA66+23%GF	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DATE 01/13/06"			
MM (INCH)		DATE			
.0 ±		DATE			
.00 ±		DATE			
.000 ±		DATE			
ANGLES ± 1°		G.E :			
THIRD ANGLE PROJECTION		FINISH :			
		SCALE : 1:1			
		DO NOT SCALE DRAWING			
		SHEET 1 OF 1			

DEGSON® 宁波高正电子有限公司
DEGSON ELECTRONICS CO., LTD

NAME
DG58S-B-XXP-1Y-00A(H)

DRAWING NO. DG58S-E02
/PART NO.

SIZE A3
REV T2
12/08/07