



REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		25%GF变更为23%GF	CSX	03/24/06	
△		增加UL刻字	CSX	04/17/06	
△		品名、料号增加环保标识“00”	YeJ	12/08/07	

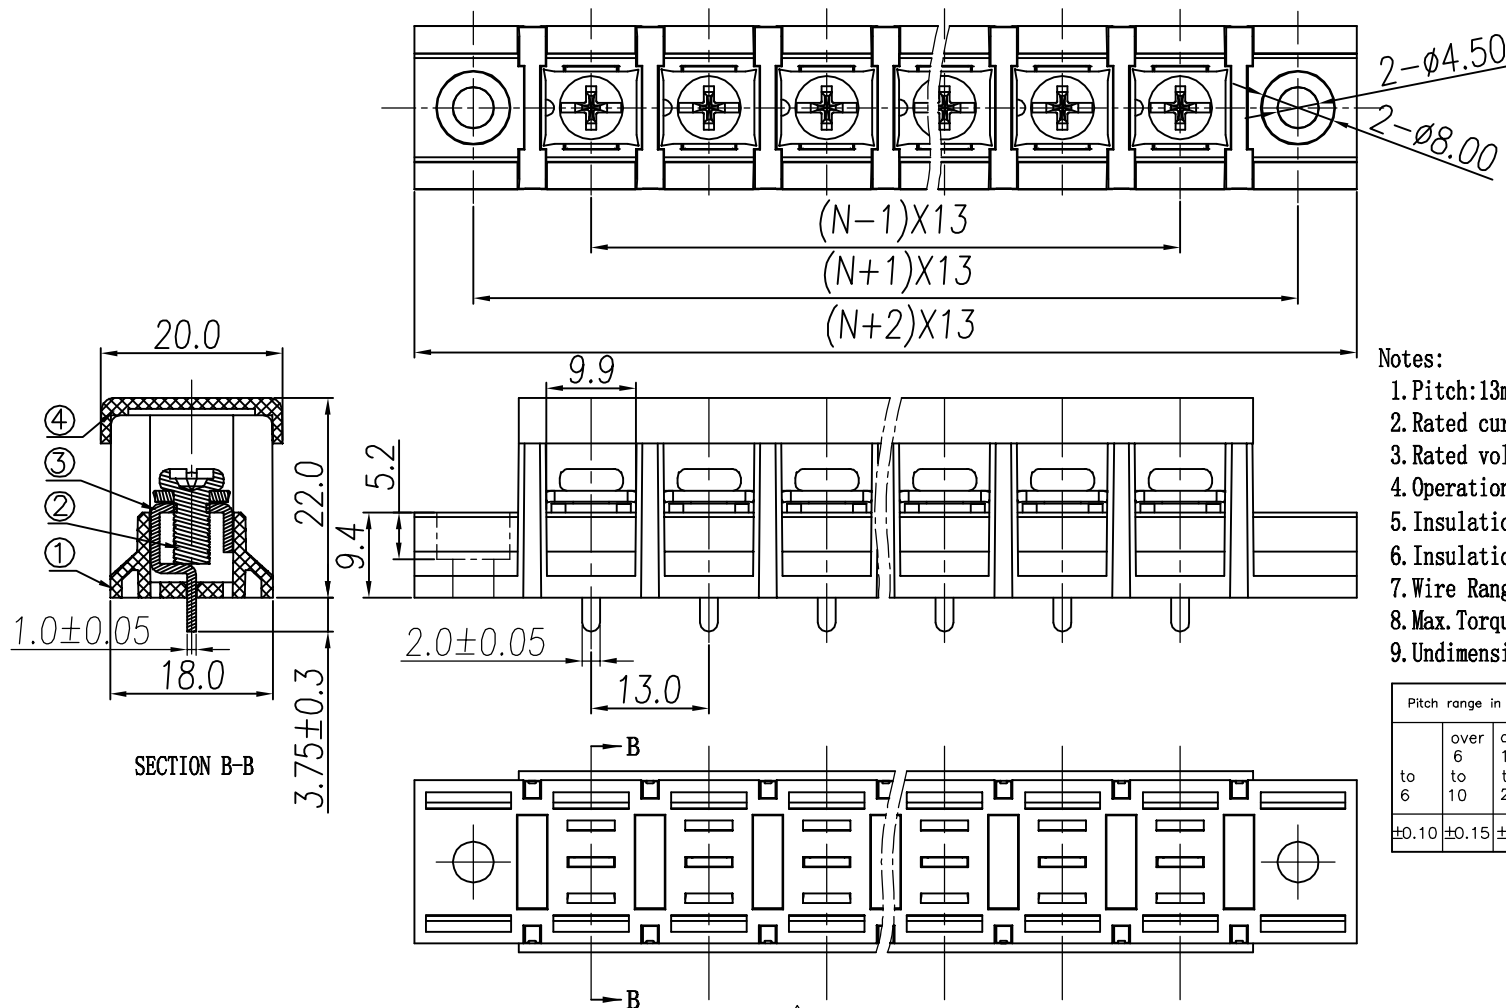

Notes:

1. Pitch: 13mm , Poles: 2-18P
2. Rated current: 40A
3. Rated voltage: 600V
4. Operation temperatures: -30° C~+120° C
5. Insulation Withstand Voltage: AC2000V/1Min
6. Insulation Resistance: 1000MΩ /DC500V
7. Wire Range: 18~10AWG
8. Max. Torque Value: 12. 24kgf. cm
9. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

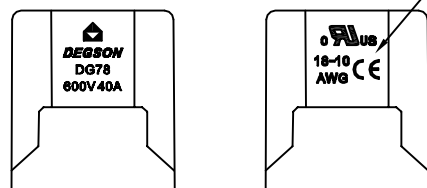

4	DG78-Cover	5034C07XXA (H)	1	PC	
3	DG78C Pin header	5009B00010 (H)	XX	Brass	SnCe plated
2	M4*8 (8*10) bright Screws	S000000510 (H)	XX	Steel	Ni plated

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	DG78 Housing	5034M0YXXA (H)	1	PA66+23%GF	UL94V-0
<div> <div> <div>MM (INCH)</div> <div>TOLERANCES EXCEPT AS NOTED</div> <div> <div>MM</div> <div>.0 ±</div> <div>.00 ±</div> <div>.000 ±</div> </div> <div> <div>±</div> <div>±</div> <div>±</div> </div> </div> <div> <div>ANGLES ± 1°</div> <div>G.E :</div> <div>FINISH :</div> <div>SCALE : 1:1</div> </div> <div> <div>THIRD ANGLE PROJECTION</div> </div> </div> <div> <div>DEGSON®</div> <div>宁波高正电子有限公司</div> <div>DEGSON ELECTRONICS CO., LTD</div> <div>NAME</div> <div>DG78C-A-XXP-1Y-00A(H)</div> <div>DRAWING NO. DG78C-E01</div> <div>SIZE A3</div> <div>REV T3</div> <div>12/08/07</div> </div>					
DO NOT SCALE DRAWING				SHEET 1	OF 1