
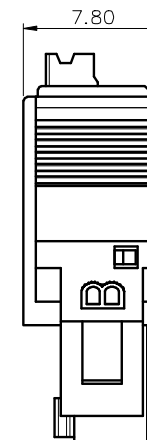
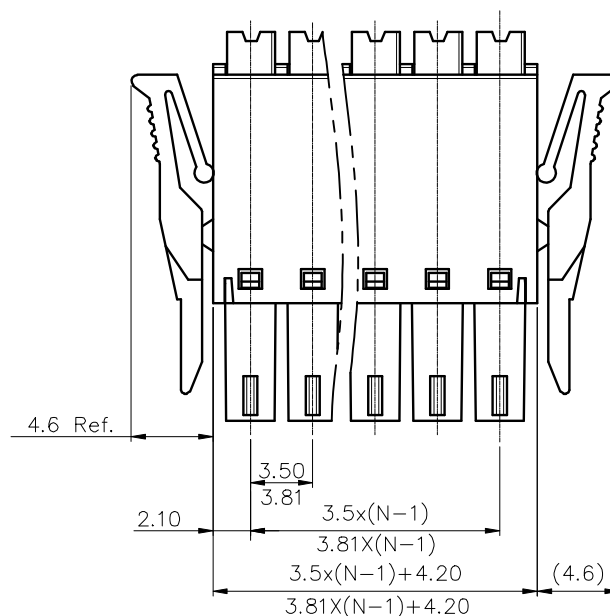
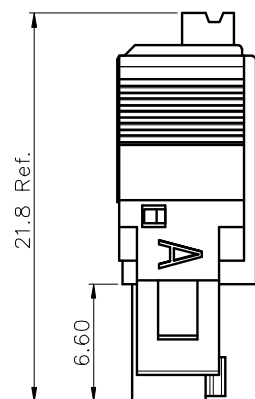

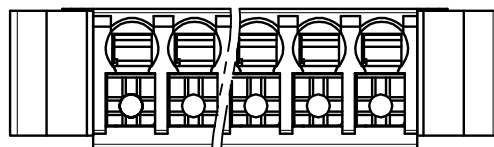


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 8A
- 2.Withstanding voltage : AC1600V/1Min.
- 3.Wire range : 28~16AWG

IEC Standard

1.

Pollution degree	2
Overvoltage category	II
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	250V
Rate current(A)	8A

2.Wire range : 0.2~1.0mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 3.50/3.81mm, Poles : N=02~20P
- 3.Stripping length : 10mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm						
Over 6	Over 10	Over 10	Over 30	Over 60	Over 100	Over 150		0.1/10
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6.RoHS Compliance

15EDGKNG - 3.5/3.81 - XXP - 1Y - 1000A (H)
(Series No.) (Pitch) (Poles) (Single Pitch) (Color)
(RoHS)
1000A-(Standard)
1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

DETACHED LISTS	PART NO.:	/				宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	/				NAME: 15EDGKNG-3.5/3.81-XXP-1Y-1000A(H)			
	CHKD:	/				TITLE: CUSTOMER DRAWING			
	DRFT:	/				REV		D0	
	THIRD ANGLE PROJECTION		DRAWING NO.:		/		SHEET		1/1
		MM (INCH)		DO NOT SCALE DRAWING		SCALE		1:1	