





- Notes:
- 1. Pitch: 7.62mm, Poles: 2-12P
 - 2. Rated voltage/current : UL 300V/15A
VDE 400V/10A
 - 3. Operation temperatures : -40° C~+105° C
 - 4. Insulation resistance: 5000MΩ/DC1000V
 - 5. Withstanding voltage : AC2000V/1Min
 - 6. Wire Range: 28~12AWG , 2.5mm²
 - 7. Max. Torque Value: M2.5, 4.08kgf.cm
 - 8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
over 6 to 6	over 10 to 10	over 10 to 24	over 30 to 30	over 60 to 60	over 100 to 100	over 150 to 150	over 150 to 150	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

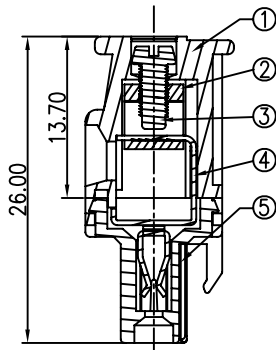

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		料号变更:由5000001370变更为5000000980	Yangys	01.12.07
△		品名、料号增加环保标示“(H)”	LJH	12/11/07
△		增加VDE刻字	WLM	11/19/08

5	2EDGKA-7.62 Cover	1053COYXXA(H)	1	PA66	UL94V-0
4	2EDGKA-Clamp	1028B00010(H)	XX	Phosphor bronze	Ni plated
3	2EDGK Screw "M2.5	△ S000000980(H)	XX+2	Steel	Cr ³⁺ /Zn
2	DG128 CAGE	X000000020(H)	XX	Brass	Ni plated

1	2EDGKAM-7.62 housing	1084A0YXXA (H)	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES	
DETACHED LISTS	<div>← MM (INCH) →</div>		DFTO Zhuwm	DATE 09/27/06*		
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
			MFO	DATE		
			APPVL	DATE		
	MM		<div><div></div><div>宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div></div>			
	.0 ± ±					
	.00 ± ±					
	.000 ± ±					
	ANGLES ± 1°		NAME 2EDGKBM-7.62-XXP-1Y-00A (H)			
		G.E :		DRAWING NO. 2EDGKBM-7.62-E01		
		FINISH :		/PART NO.		
		SCALE : 1:1		DO NOT SCALE DRAWING		
THIRD ANGLE PROJECTION				SHEET 1	OF 1	
				SIZE A3	REV T3 11/19/08*	